



# Cordless Ratchet Wrench WR100D 9.5 mm (3/8") / 6.35 mm (1/4")



Max fastening torque

**47.5** N·m



**Cordless ratchet wrench powered  
by 12V max CXT Li-Ion battery**



Can also be used as a hand ratchet wrench



# No load speed: 800 min.<sup>-1</sup>

providing high efficiency fastening.

## Compatible with variable sockets with socket adaptor



**Socket adaptor**  
9.5 mm (3/8" )  
Part No.191A50-3



**Socket adaptor**  
6.35 mm (1/4" )  
Part No.191A51-1

## Easy to grip ergonomic design

The grip diameter is smaller than that of the competitors, providing the same good handling as hand ratchet wrenches.




Can also be used as a hand ratchet wrench

Switch lever



## Forward / reverse rotation change

Turn the reversing lever to the A side for clockwise rotation or to the B side for counterclockwise rotation.

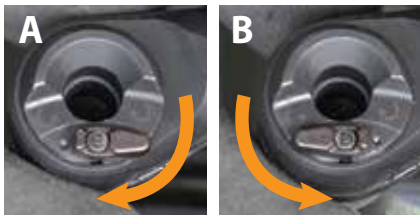

## Able to tighten 13mm nut onto M8 threaded rod



13mm nut only

## LED job light

with preglow and afterglow functions



## Standard Equipment

Tool bag  
Part No.  
832071-7



## Li-ion Battery & Charging Time Reference, Compatibility Chart

	<b>BL1016</b> 12V max 1.5Ah	<b>*BL1021B</b> 12V max 2.0Ah	<b>*BL1041B</b> 12V max 4.0Ah
<b>DC10SB</b> 	<b>22</b> min	<b>30</b> min	<b>60</b> min
<b>DC10WD</b> 	<b>50</b> min	<b>70</b> min	<b>130</b> min

## Cordless Ratchet Wrench

**WR100D** 9.5 mm (3/8" ) / 6.35 mm (1/4" )

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

<b>Capacity</b>	Standard Bolt: M5 - M12 (3/16" - 1/2") High Tensile Bolt: M5 - M10 (3/16" - 3/8")
<b>Square Drive</b>	9.5 / 6.35 mm (3/8" / 1/4" )
<b>No Load Speed (RPM)</b>	0 - 800
<b>Max Fastening Torque</b>	47.5 N·m (420 in.lbs.)
<b>Max Output</b>	250 W
<b>Vibration Level</b>	2.5 m/s <sup>2</sup> or less
<b>Sound Pressure Level</b>	74 dB(A)
<b>Dimensions (L x W x H)</b>	w/ BL1016/BL1021B: 341x67x63 mm (13-7/16"x2-5/8"x2-1/2") w/ BL1041B: 341x67x84 mm (13-7/16"x2-5/8"x3-5/16")
<b>Net weight</b>	1.0 - 1.2 kg (2.3 - 2.7 lbs.)

**WR100DSA** : 1 battery 2.0Ah (BL1021B) , fast charge (DC10SB)

**WR100DZ** : Battery & charge not include

**Standard Equipment** : Socket adaptor 9.5 (191A50-3), Socket adaptor 6.35 (191A51-1), tool bag (832071-7 \*WR100DSA only)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combinations, according to EPTA-Procedure 01/2014, are shown in the table. *Items of standard equipment and specifications may vary by country or area.*

## CÔNG TY TNHH MAKITA VIỆT NAM

Kho 4-5-6, Block 16, 18/12 Đường số 3, KCN VSP, P. Hòa Phú, TP. Thủ Đức, Bình Dương  
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

### CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, Số 1, Đường Số 6, KCN - DT - DV VSP, Bắc Ninh, P. Phú Chấn, TP. Từ Sơn, T. Bắc Ninh.  
ĐT: 0222 376 5942 Fax: 0222 376 5941

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI

65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.  
ĐT: 0243 202 2385

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG

102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.  
ĐT: 0236 352 5078 / 0236 352 5179 Fax: 0236 352 5479

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ

386 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ.  
ĐT: 0292 389 4358 Fax: 0292 389 4358

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỘT

59 Lê Đức Thọ, P. Thống Nhất, TP. Buon Ma Thuột, T. Đắk Lắk.  
ĐT: 0262 355 4556 Fax: 0262 355 4557

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG

Số 01 Lô D/H-01, Dự án Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.  
ĐT: 0225 883 1529

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHA TRANG

Là 36/36 đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc, TP. Nha Trang, T. Khánh Hòa  
ĐT: 0258 220 0039

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH

Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.  
ĐT: 0283 821 5191