

Insert rivet into the hole.



Pull trigger to tighten the rivet.



#### Jaw case designed to enable tight space operation

The short center height allows for tight space operation such as close-to-wall riveting.

Center height  
**26 mm**



#### Rivet holding mechanism



- Once a rivet is installed, it is held in place and do not drop out even when the tool is directed downward.
- No need for holding the rivet by hand even in vertical down application

## High speed riveting as same as pneumatic tools.



**Twin LED job light**  
With pre-glow and afterglow functions



**Transparent container for spent mandrels\***

The amount of spent mandrels\* can be checked.  
\* mandrel shaft broken off from a tightened rivet



#### Compatible with various sizes of blind rivets

A wide range of nose pieces and jaw pushers allow for tightening various sizes of blind rivets.

**DRV150**  
[Compatible rivet diameter]  
Ø2.4mm / 3.2mm / 4.0mm / 4.8mm

**DRV250**  
[Compatible rivet diameter]  
Ø4.8mm / 6.0mm / 6.4mm  
Ø2.4mm / 3.2mm / 4.0mm  
(use with optional Nose piece, Jaw pusher and pipe)

**Work amount on a full battery charge (approx)**

**2,300 rivets**


Model: DRV150  
Mandrel diameter: Ø4.8mm  
Battery: BL1850B ( 5.0Ah )

DRV250 : 2,000 rivets ( 5.0Ah )

**BL MOTOR XPT**



Accessories

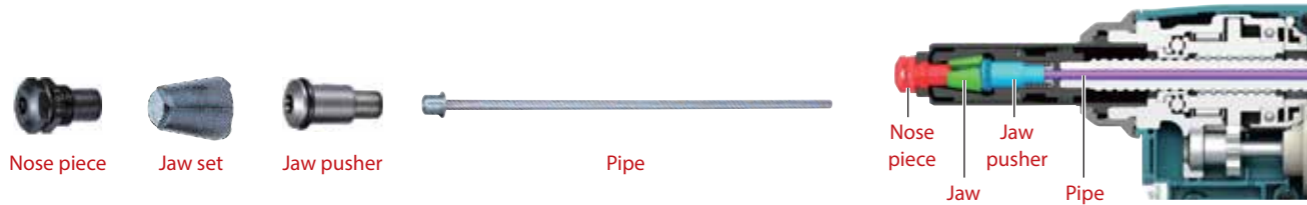

Model		DRV150 / DRV250				DRV250			
Rivet	Size	Ø2.4 (3/32")	Ø3.2 (1/8")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø6.0 (3/16")	Ø6.4 (3/16")
	Mandrel diameter: mm	Ø1.4-1.6	Ø1.8-2.1	Ø2.2-2.6	Ø2.6-3.2	Ø2.2-2.6	Ø2.6-3.2	Ø3.1-3.5	Ø3.5-3.9
Nose piece and Jaw pusher set *with pipe	Size	Ø2.4 (3/32")	Ø3.2 (1/8")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø4.0 (5/32")	Ø4.8 (3/16")	Ø6.0 (3/16")	Ø6.4 (3/16")
	Part No.	*199729-4	*199728-6	191C04-2	191C03-4	*191F80-4	*191F79-9	*199725-2	*191F78-1
Jaw set (3pcs set)	Size	4.8				6.4			
	Part No.	199731-7				199730-9			
Nose piece assy		127230-9	127229-4	127228-6	127225-2	127228-6	127225-2	127224-4	127223-6
Jaw pusher assy	Color / Size	Gray / 1.9	Black / 2.5	Gray / 3.1	Black / 3.6	Gray / 3.1	Black / 3.6	Gray / 4.0	Black / 4.5
	Part No.	127478-3	127477-5	127476-7	127475-9	127476-7	127475-9	127474-1	127473-3
Pipe	Color / Size	Silver / 2.3	Black / 2.8	Pipe is not necessary for operation. (DRV150)		Silver / 3.5	Silver / 4.2		Silver / 4.6
	Part No.	162747-5	162746-7			162745-9	162744-1		162743-3

Tool Protector


	For Nose	For Motor	Set
DRV150	422572-9	422571-1	191G65-6
DRV250	422573-7		191G66-4



Battery Protector



Grease set (5g)



Cordless Rivet Gun  
DRV150 / DRV250

	DRV150	DRV250
Brake	Max pulling force 10 kN	20 kN
Built-in Job Light	Length of Stroke 25 mm (1")	30 mm (1-3/16")
Carrying Case	Center height 26 mm (1")	26 mm (1")
	Sound Pressure Level 75 dB(A)	74 dB(A)
	Vibration Level 2.5 m/s <sup>2</sup> or less	2.5 m/s <sup>2</sup> or less
	Dimensions (L x W x H) w/ BL1815N / BL1820B: 310x80x270 mm (12-1/4"x3-1/8"x10-5/8")	w/ BL1815N / BL1820B: 320x80x270 mm (12-5/8"x3-1/8"x10-5/8")
	w/ BL1830B / BL1840B / BL1850B / BL1860B: 310x80x287 mm (12-1/4"x3-1/8"x11-1/4")	w/ BL1830B / BL1840B / BL1850B / BL1860B: 320x80x287 mm (12-5/8"x3-1/8"x11-1/4")
	Net weight 1.9 - 2.2 kg (4.2 - 4.9 lbs.)	2.1 - 2.4 kg (4.6 - 5.3 lbs.)

Standard Equipment : DRV150: Belt Clip, Battery, Charger, Accessory set for 2.4, 3.2, 4.0A, Grease set  
DRV250: Belt Clip, Battery, Charger, Accessory set for 4.8B, 6.0, Grease set

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.



Cordless Rivet Gun  
DRV150 / DRV250



DRV150

[Compatible rivet diameter]  
Ø2.4mm / 3.2mm / 4.0mm / 4.8mm



DRV250

[Compatible rivet diameter]  
Ø4.8mm / 6.0mm / 6.4mm  
Ø2.4mm / 3.2mm / 4.0mm (use with optional Nose piece, Jaw pusher and pipe)



Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201911

