



Cordless Fan
CF001G 40Vmax / AC



40V Li-ion
max

Noise level
48 dB (A)
[in High speed]

Quiet running
&
Powerful wind



190 Max air speed
m/min | **∅235** Fan diameter
mm



Automatic oscillation



Left / Right 45°

Adjustable fan head angle



Up 90°, Down 45°,
Left / Right 90°

Quiet running

Changed the shape of corner rear fan cover to take the air smoothly to reduce the noise.




CF001G



Predecessor Model

Easy-to-clean-up fan blades

Front cover is removable simply by removing a single screw, allowing for convenient clean up.

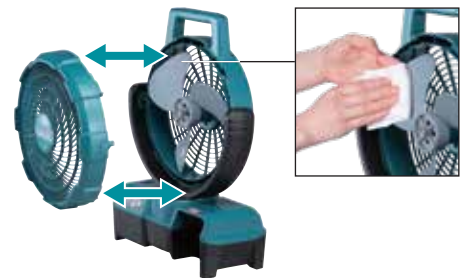

3 Wind speed settings (High/Medium/Low)

- Independent of ON / OFF button
- Resumes at the speed set in last operation.
- With LED indicator



ON / OFF switch

Off timer switch

- 3 Off timer settings: 1 hour, 2 hours, 4 hours
- with LED display

Charging Time Reference

Fast Charging		DC40RA
		The enlarged and raised LED light provides clearer indication of charging status.
	BL4025 2.5Ah	28min
	BL4040 4.0Ah	45min

Cordless Fan

CF001G 40Vmax / AC

	Continuous Use (min.)	w/ BL4040 Low / Mid / High: 1,160 / 880 / 660
	w/o oscillation	w/ BL4025 Low / Mid / High: 730 / 550 / 410
Continuous Use (min.)	w/ oscillation	w/ BL4040 Low / Mid / High: 1,055 / 800 / 600
	w/ oscillation	w/ BL4025 Low / Mid / High: 665 / 500 / 370
Max Air Velocity	High / Mid / Low: 190 / 150 / 120 m/min	
Air Flow	High / Mid / Low: 8.2 / 6.5 / 5.2 m ³ /min	
Fan Diameter	235 mm (9-1/4")	
Dimensions (L x W x H)	143x333x463 mm (5-5/8"x13"x18-1/4")	
Net weight	2.0 - 3.0 kg (4.4 - 6.6 lbs.)	

Standard Equipment : AC Adaptor

The weight may differ depending on the attachment(s), including the battery cartridge. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202005