


## Cordless Impact Wrench DTW300 1/2" (12.7 mm)



# **High Torque and Compact**

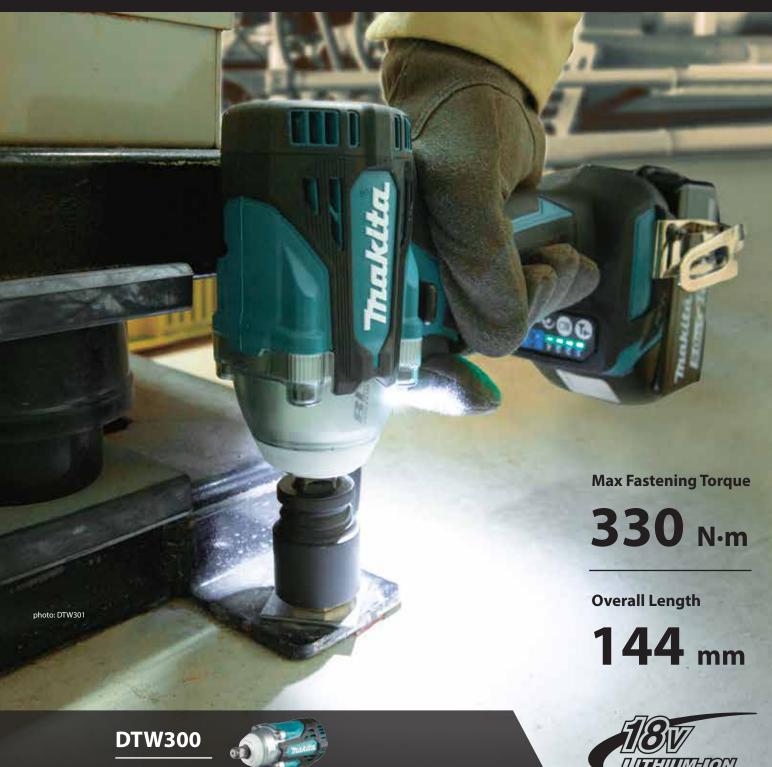

C ring








### **High Torque**

**Max Fastening Torque** 

330 N·m

### Changing the application mode

This tool employs several easy-to-use application modes for driving bolts with good control.



**DTW300** 

**C** ring

functions



**Compact overall length** 

**Phosphorescent** bumper


Hammer case cover securely fastened with four bolts


Variable speed control by trigger

#### **Ergonomically** designed handle with soft grip

provides comfortable grip and more control while minimizing hand fatigue and pain.

**Belt clip** 





Max mode (4) High strength bolt M16 Hard mode (3) High strength bolt M16

Medium mode (2) High strength bolt M14

Soft mode (1) High strength bolt M12









**Tool hanger set** with shoulder belt Part No. 197941-0











18V	DC18RC DC18RD	DC18SD
<b>BL1815N</b> 1.5Ah	15 min	30 min
<b>BL1820B</b> 2.0Ah	24 <sub>min</sub>	45 min
<b>BL1830B</b> 3.0Ah	22 min	60 min
<b>BL1840B</b> 4.0Ah	36 <sub>min</sub>	90 min
<b>BL1850B</b> 5.0Ah	45 min	110 min
<b>BL1860B</b> 6.0Ah	55 min	130 min

Cordless Impact Wrench	DTW300 1/2" (12.7 mm)		
		DTW300	
Variable Speed	Fastening Capacities	Standard Bolt: M10 - M20 (3/8" - 3/4")	
		High Strength Bolt: M10 - M16 (3/8" - 5/8")	
Brake	Square Drive	12.7 mm (1/2")	
	No Load Speed (RPM)	0-3,200/0-2,600/0-1,800/0-1,000	
Reversing	Impacts Per Minute (IPM)	0-4,000/0-3,400/0-2,600/0-1,800	
	Max Fastening Torque	330 N·m (240 ft.lbs.)	
Electronic 4-Speed	Vibration Level	12.5m/s <sup>2</sup>	
	Sound Pressure Level	97 dB(A)	
Built-in Job Light	Sound Power Level	108 dB (A)	
	Dimensions (L x W x H)	w/BL1815N/BL1820B:	
Carrying Case		144x81x228 mm (5-5/8"x3-3/16"x9")	
		w/BL1830B/BL1840B/BL1850B/BL1860B:	
		144x81x246 mm (5-5/8"x3-3/16"x9-11/16")	
	Net weight	1.5 - 1.8 kg (3.4 - 4.1 lbs.)	
	Standard Faviron ant - Dalt (	The Datham Channe	
	Standard Equipment: Belt Clip, Battery, Charger		

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

#### Makita Corporation