



Cordless Fan
CF001G 40Vmax / AC



40V Li-ion max

Noise level
48 dB (A)
[in High speed]

**Quiet running
&
Powerful wind**



190 Max air speed
m/min | **∅235** Fan diameter
mm



Automatic oscillation



Left / Right 45°

Adjustable fan head angle



Up 90°, Down 45°,
Left / Right 90°

Quiet running

Changed the shape of corner rear fan cover to take the air smoothly to reduce the noise.




CF001G



Predecessor Model

Easy-to-clean-up fan blades

Front cover is removable simply by removing a single screw, allowing for convenient clean up.

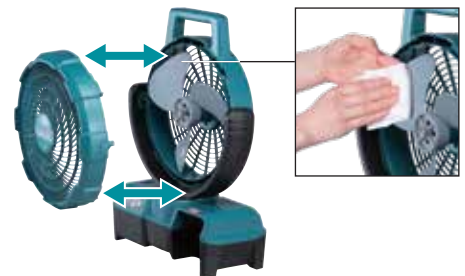

Automatic oscillation

3 Wind speed settings (High/Medium/Low)

- Independent of ON / OFF button
- Resumes at the speed set in last operation.
- With LED indicator



ON / OFF switch

Off timer switch

- 3 Off timer settings: 1 hour, 2 hours, 4 hours
- with LED display

Charging Time Reference

Fast Charging

40V^{Li-ion}max

DC40RA

The enlarged and raised LED light provides clearer indication of charging status.



BL4025 2.5Ah

28min

BL4040 4.0Ah

45min

Cordless Fan

CF001G 40Vmax / AC



Electronic 3-Speed

Continuous Use (min.) w/o oscillation	w/ BL4040 Low / Mid / High: 1,160 / 880 / 660 w/ BL4025 Low / Mid / High: 730 / 550 / 410
Continuous Use (min.) w/ oscillation	w/ BL4040 Low / Mid / High: 1,055 / 800 / 600 w/ BL4025 Low / Mid / High: 665 / 500 / 370
Max Air Velocity	High / Mid / Low: 190 / 150 / 120 m/min
Air Flow	High / Mid / Low: 8.2 / 6.5 / 5.2 m ³ /min
Fan Diameter	235 mm (9-1/4")
Dimensions (L x W x H)	143x333x463 mm (5-5/8"x13"x18-1/4")
Net weight	2.0 - 3.0 kg (4.4 - 6.6 lbs.)

Standard Equipment: AC ADAPTOR (TE00000173)

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202005