


**Cartridge type**


**300ml size Holder**

**Holder A Set** Part No. 196351-8

- Holder A (Cartridge type)
- Holder joint A
- Rack 42
- Piston A

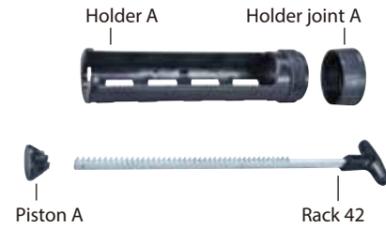

**Max Compatible sealant size**




Cartridge type [Piston A]

**Cartridge type / Sausage type / Bulk sealant type**


**600ml size Holder**

**Holder B Set** Part No. 196352-6

- Holder B ■ Holder joint B ■ Rubber ring
- Nozzle ■ Rack 64
- Piston A (Cartridge type)
- Piston B (Sausage type)
- Piston C (Bulk sealant type)

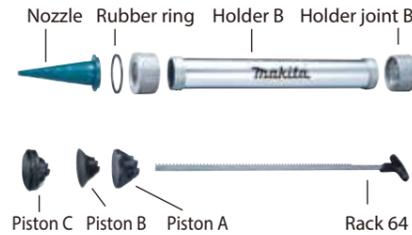

**Max Compatible sealant size**



Cartridge type [Piston A]



Sausage type [Piston B]


Bulk sealant type [Piston C]

**Cartridge type / Sausage type**

**800ml size Holder**

**Holder C Set** Part No. 197195-9

- Holder C ■ Holder joint C
- Holder joint C Complete
- Piston D (Cartridge type)
- Rack 53

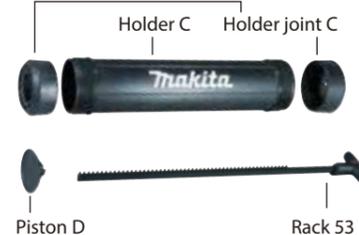

**Max Compatible sealant size**



Cartridge type [Piston D]



Sausage type [Use with Piston E] (Part No. 143222-0)



**Cordless Caulking Gun**  
CG100D CXT  
DCG180 LXT



Photo : CG100D

**Li-Ion Cordless Caulking Gun Series**

**Li-ion Battery, Charging Time Chart (approx): min.** \*with Battery fuel gauge

Charger	CXT 12V <sup>max</sup> LITHIUM-ION			LXT 18V <sup>max</sup> LITHIUM-ION						
	BL1016 1.5Ah	*BL1021B 2.0Ah	*BL1041B 4.0Ah	BL1815N 1.5Ah	*BL1820B 2.0Ah	*BL1830B 3.0Ah	*BL1840B 4.0Ah	*BL1850B 5.0Ah	*BL1860B 6.0Ah	
DC105B				DC18RC						
DC18RE CXT & LXT Dual port Fast Charger	22 min	30 min	60 min	DC18RE CXT & LXT Dual port Fast Charger	15 min	24 min	22 min	36 min	45 min	55 min
DC10WD	50 min	70 min	130 min	DC18SD	30 min	45 min	60 min	90 min	110 min	130 min

**Cordless Caulking Gun CG100D / DCG180**

	CG100D	DCG180
Variable Speed	5,000 N (1,100 lbs)	5,000 N (1,100 lbs)
Built-in Job Light	0-28 mm/sec. (0-66 in./min.)	0-28 mm/sec. (0-66 in./min.)
Carrying Case	Dimensions (L x W x H) with Holder A set, BL1021B : 404x108x259 mm (15-7/8"x4-1/4"x10-1/4") with Holder B set, BL1021B : 538x108x259 mm (21-1/4"x4-1/4"x10-1/4") with Holder C set, BL1021B : 480x108x267mm (18-7/8"x4-1/4"x10-1/2")	Dimensions (L x W x H) with Holder A set, BL1830B : 404x108x281 mm (15-7/8"x4-1/4"x11-1/8") with Holder B set, BL1830B : 538x108x281 mm (21-1/4"x4-1/4"x11-1/8") with Holder C set, BL1830B : 480x108x289 mm (18-7/8"x4-1/4"x11-3/8")
	Net weight with Holder A set : 1.9 - 2.1kg (4.2 - 4.5 lbs) with Holder B set : 2.5 - 2.6kg (5.5 - 5.8 lbs) with Holder C set : 2.3 - 2.4kg (5.0 - 5.4 lbs)	Net weight with Holder A set : 2.1 - 2.4kg (4.7 - 5.4 lbs) with Holder B set : 2.6 - 3.0kg (5.8 - 6.6 lbs) with Holder C set : 2.5 - 2.8kg (5.4 - 6.2 lbs)

Items of standard equipment and specifications may vary by country or area.

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201710



DCG180 + 600ml size Holder

CG100D

DCG180

# Delivers an industry-leading 5,000 N (1,100 lbs) of dispensing force to work with the highest viscosity adhesives and sealants



## Optimized center of gravity

provides ideal tool balance to reduce stress on the user's wrist.

### CG100D



### DCG180



Speed control dial

## Standard equipment

### Cartridge type

#### 300ml size Holder

#### Holder A Set

Part No. 196351-8



For Bonding of external wall, window frame.



For Water section and Interior finishing

## Option Accessories

### Cartridge type / Sausage type / Bulk sealant type

#### 600ml size Holder

#### Holder B Set

Part No. 196352-6



For Sealing work with two-component system



For Tile bonding

Photo : CG100D

### Variable speed control by dial and trigger switch

#### Speed control dial

enables to set maximum pushing speed for optimum sealant flow rate



#### Variable speed trigger switch

allows user to match speed to the application



### 360 degree rotating sealant holder

Easy to work in any angle by simply rotating sealant holder



### Overload warning lamp

LED light notifies when the tool is overloaded for preventing breakage of the sealant cartridge as follows:

- Blinking/ The tool is nearly overloaded.
- Solid/ The tool is overloaded; the overload circuit will shut off the power.



### LED job light

with pre-glow and afterglow functions



### Anti-drip function

relieves pressure when switch trigger is released to prevent unintentional dispensing.



### Rubberized soft grip

provides comfortable grip and better control.

### Cartridge type / Sausage type

#### 800ml size Holder

#### Holder C Set

Part No. 197195-9

