



# Cordless Power Cutter DCE090 230 mm (9")



Max cutting depth  
**88 mm**

**Cordless**  
Powered by two 18V LXT  
Li-Ion batteries in series



**18v + 18v → 36v**

**BL**  
MOTOR

**AFT**

**(BRAKE)**

**XPT**

# Efficient cutting by BL motor & User protection systems



**BL  
MOTOR**



**XPT**



**Overload warning LED lamp**

- alerts operator of overload with a red blinking LED.
- reduces unnecessary battery recharging by overload protection.



**LED job light**

enables operation in the dark sites where electricity is not supplied.



**Battery cover**

protects battery from water in wet cutting.



**Water supply kit can be connected.**


The hose is designed to run inside the tool housing to prevent from being caught in objects.

**Electric brake**

- After the switch trigger is released:
  - Diamond wheel stops in approximately 4.0 seconds
  - Cut-off wheel stops in approximately 2.0 seconds

## AFT Active Feedback sensing Technology

shuts down current to the motor to protect user, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

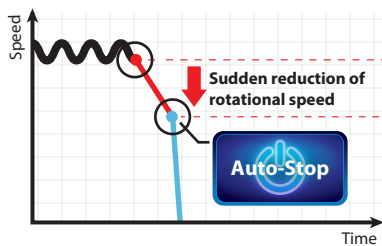

## Accessories

### Abrasive Cut-off Wheel / Inox

Part No. E-03006  
230 x 2.0 x 22.23 WA36R



### Diamond Wheel 230mm Segmented

Part No. E-02967  
230 x 22.23 Dry & Wet



### 230mm Diamond wheel ideal for cordless power cutter

- New diamond wheel with even pattern placement of diamond grits
- The grit arrangement provides sharp cutting edge constantly.

## Charging Time

18V LITHIUM-ION	DC18RC	DC18RD	DC18SD
BL1815N 1.5Ah	15 min		30 min
BL1820B 2.0Ah	24 min		45 min
BL1830B 3.0Ah	22 min		60 min
BL1840B 4.0Ah	36 min		90 min
BL1850B 5.0Ah	45 min		110 min
BL1860B 6.0Ah	55 min		130 min

## Cordless Power Cutter

### DCE090 230 mm (9")

- Brake
- Soft Start
- Built-in Job Light

Wheel Diameter	230 mm (9")
Wheel Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	3.0 mm (1/8")
Max Cutting Capacity	88 mm (3-1/2")
No Load Speed (RPM)	6,600
Vibration Level	Left / Right: 5.9 / 4.0 m/s <sup>2</sup>
Sound Pressure Level	103 dB(A)
Sound Power Level	114 dB(A)
Dimensions (L x W x H)	554x241x283 mm (21-3/4"x9-1/2"x11-1/8")
Net weight	5.6 - 6.3 kg (12.3 - 13.9 lbs.)

**Standard Equipment:** Hex Wrench, Wrench, Coupling Sleeve, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202006