



# Cordless Earth Auger DDG460



## Battery Powered and Powerful



<p>Continuous run time on full battery charge depth 600mm / with BL1860B (6.0Ah) x2</p>		<p>Lightweight with BL1860B (6.0Ah) x2</p> <p><b>8.2</b> kg</p>
<p>ø150mm</p>	<p>ø200mm</p>	
<p>about <b>155</b> holes</p>	<p>about <b>90</b> holes</p>	








### Reversing switch

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



### Torque limiter

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.

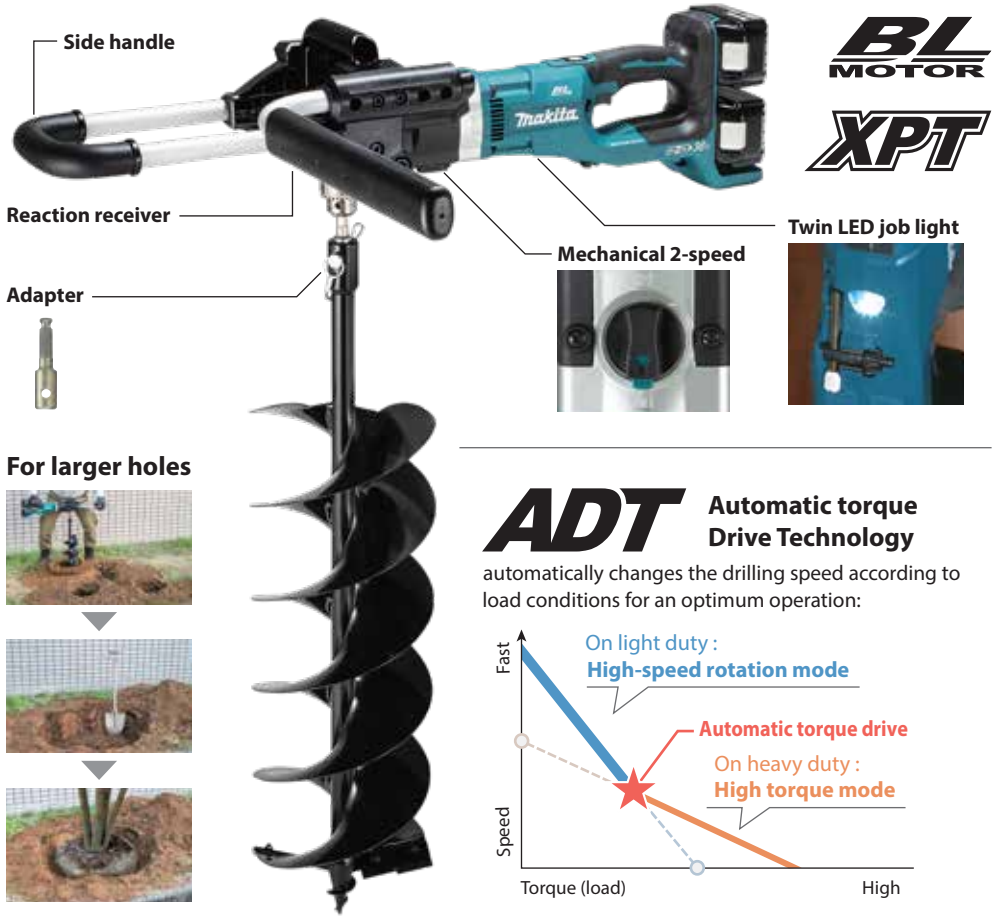


### For larger holes




### ADT Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation:

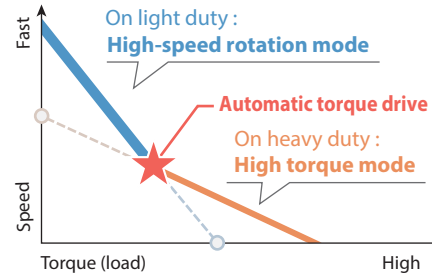

### Accessories

Earth auger drill bit Length: 800mm

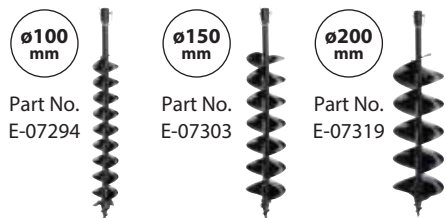

Part No. E-07294

Part No. E-07303

Part No. E-07319

Blade for earth auger bit Changing blade for Earth auger drill bit



Part No. E-07630

Part No. E-07646

Part No. E-07652

Extension bar Part No. E-07325

540 mm

### Pin for earth auger drill

Part No. E-07331



### Handle set

includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier.

Part No. 191P11-3



### Cordless Earth Auger DDG460

- Variable Speed
- Brake
- Reversing
- Mechanical 2-Speed
- Torque Limiter
- Soft Start
- Built-in Job Light
- Carrying Case

<b>Capacity</b>	Sandy Soil: 200 mm Clay Soil: 150 mm
<b>No Load Speed (RPM)</b>	High / Low: 0 - 1,400 / 0 - 350
<b>Max Fastening Torque</b>	High: 48 N-m Low: 136 N-m
<b>Vibration Level</b>	2.5 m/s <sup>2</sup> or less
<b>Sound Pressure Level</b>	85 dB(A)
<b>Sound Power Level</b>	96 dB(A)
<b>Dimensions (L x W x H)</b>	840 x 607 x 223 mm
<b>Net weight</b>	7.3 - 8.2 kg (not include blade for earth auger bit)

DDG460ZX4: No battery, charger

Standard Equipment: Adapter d (327687-6), chuck key S-13 (763251-3), hex. wrench 5 (783232-1), hex. wrench 6 (783204-6), hex. Wrench 10 (783207-0), hex. socket head bolt M8x30 (922453-2).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

## CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC  
Khu S, Số 1, Đường Số 6 KCN - BT - DV VSPP Bắc Ninh, X. Phú Chấn,  
TP. Từ Sơn, T. Bắc Ninh.  
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH HÀ NỘI  
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,  
ĐT: 0243 202 2385

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH ĐÀ NẴNG  
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng,  
ĐT: 0236 352 5078 / 0236 352 5178 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH CẦN THƠ  
386 Võ Văn Kiệt, Khu Vực S, P. An Thới, Q. Bình Thủy,  
TP. Cần Thơ.  
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH BUỒN MA THUỐT  
89 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk,  
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH HẢI PHÒNG  
Số 01 Lô D1-01, Dự án Hoàng Huy Riverside, P. Thượng Lý,  
Q. Hồng Bàng, TP. Hải Phòng.  
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH NHA TRANG  
Là 36 - 38 đường B6, Khu đô thị Vinh Diêm Trung, Xã Vinh Ngọc, TP. Nha Trang, T. Khánh Hòa  
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH HỒ CHÍ MINH  
Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,  
ĐT: 0283 821 5191