

Satisfy Professional's Needs



Cordless Angle Grinder  
BGA402 100mm (4")



Free from Cord



# Capable of using wheels / discs for AC grinders



Soft grip for enhanced hand comfort

## Electronic current limiter (with warning lamp)

Protects motor from overheating with auto-cut off function in case of continuous operation with overloaded.

## Anti-restart function (with warning lamp)

No start up if battery is inserted with slide switch is ON.

## When overloaded, protect motor by letting operator know with warning lamp

### Electronic current limiter process

Operation with overloaded



Warning lamp turns ON

Lighten the load.  
Warning lamp turns OFF

Operation provides continuously

Further continuous operation with overloaded for approx. 2 seconds

STOP by working Electronic Current Limiter

### Anti-restart function process

Inserts battery with slide switch is ON




Warning lamp starts blinking

NO START UP by working Anti-restart function


## Efficiency of concrete cutting

Test conditions : Cut concrete to depth of 5 mm.

Time required to cut 600mm

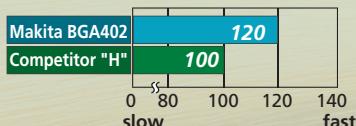

Total cut length on a single battery charge

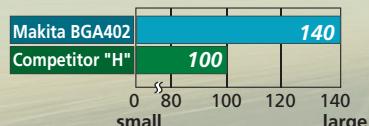

Numbers in the charts above are relative values when setting Competitor "H" capacity as 100. It may differ under some conditions.

## Accessories

Rubber pad 76  
Part No. 743009-6



Wheel cover  
For wire bevel brush  
Part No. 192412-2



Sanding lock nut  
Part No. 224502-4



For wire cup brush  
Part No. 192454-6



Base ass'y  
Part No. 123059-1



For cut-off wheel  
Part No. 192626-3



For dust collection  
Part No. 192475-8

## Cordless Angle Grinders



Carrying Case



## BGA402 100mm (4")

430 W

### Capacity

Depressed center wheel: 100mm (4")

Abrasive disc: 100mm (4")

Diamond wheel: 100mm (4")

No load speed: 10,000rpm

Dimensions (L x W x H): 317 mm x 118mm x 118mm (12-1/2" x 4-5/8" x 4-5/8")

Net weight: 1.9kg (4.2lbs)\*

Voltage: 18V

Standard Equipment: \*without Wheel, Wheel cover, Inner flange and Lock nut  
Fast Charger, Battery Cartridge, Depressed Center Wheel, Lock Nut Wrench, Side Grip

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23354-2 AI-AH