

## Accessories

### Dust collecting wheel guard

For DGA900 & AC 230mm Angle Grinder  
 Max cutting depth: 60mm  
 with three notches on Bearing box type  
 Part No. 198440-5 (IEC)  
 Use with Inner flange 45cc Part No. 198678-2  
 (for Diamond cut off wheel)



Clear cover to check blade tip

### Plunge cutting can be done without lifting Base



### Dust collection wheel guard

for 180mm cup diamond wheel



Part No. : 195384-0



### Wheel cover for cut-off wheel



Part No.

DGA900 : 122913-6 (IEC)

DGA700 : 122914-4 (IEC)



### Cordless Angle Grinder

### DGA900 230 mm (9") /DGA700 180mm (7")



Brake



Soft Start



Dust Collection



Carrying Case

	DGA900	DGA700
Wheel Diameter	230 mm (9")	180 mm (7")
No Load Speed (RPM)	6,000	7,800
Vibration Level		
Surface Grinding with Anti-Vibration Side Grip:	7.5m/s <sup>2</sup>	7.5m/s <sup>2</sup>
Disc Sanding with Anti-Vibration Side Grip:	2.5m/s <sup>2</sup> or less	2.5m/s <sup>2</sup> or less
Sound Pressure Level	88dB(A)	88dB(A)
Sound Power Level	99 dB(A)	99 dB(A)
Dimensions (L x W x H)	499x250x158 mm	499x200x158 mm
Net weight	5.2 - 8.0 kg	5.0 - 6.0 kg

DGA900Z: No battery, charger

DGA700Z: No battery, charger

Standard Equipment : DGA700Z: toolless wheel cover 180k (122846-5), grip 37 complete (143486-6), lock nut wrench 35 (782034-2)  
 DGA900Z: toolless wheel cover 230k (122847-3), grip 37 complete (143486-6), lock nut wrench 35 (782034-2)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
 Items of standard equipment and specifications may vary by country or area.

### CÔNG TY TNHH MAKITA VIỆT NAM

Kho 06, Block 16, 18L1-2 Đường số 3, KCN VSIP II, P. Hòa Phú, TP. Thủ Dầu Một, Bình Dương  
 ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

### CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, số 1, đường số 6, KCN - ĐT - DV VSIP Bắc Ninh, X. Phú Chấn, TX Từ Sơn, T. Bắc Ninh  
 ĐT: 0222 376 5942 Fax: 0222 376 5941

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG

Số 15, Phố Phạm Hồng Thái, Quận Hồng Bàng, Thành phố Hải Phòng  
 Điện thoại: 0225 8831 529

### TRUNG TÂM DVKH CHI NHÁNH ĐÀ NẴNG

102 Đ. Triệu Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng  
 ĐT: 0236 352 5079/ 0236 352 5179 Fax: 0236 352 5479

### TRUNG TÂM DVKH CHI NHÁNH NHA TRANG

1053 Đ. 2/4, P. Vạn Thạnh, TP. Nha Trang, T. Khánh Hòa  
 ĐT: 0258 3823 338

### TRUNG TÂM DVKH CHI NHÁNH BUỒN MA THUỘT

60 Đ. Y Jút, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk  
 ĐT: 0262 355 4556 Fax: 0262 355 4557

### TRUNG TÂM DVKH CHI NHÁNH CẦN THƠ

226 Đ. Võ Văn Kiệt, P. An Thới, Q. Bình Thủy, TP. Cần Thơ  
 ĐT: 0292-3894358 Fax: 0292-3894359

**Makita**

## Cordless Angle Grinder

DGA900 230mm (9")

DGA700 180mm (7")

Satisfy Professional's Needs

**LXT**



# High Power similar to AC tool



**18V + 18V → 36V**

**BL MOTOR ADT AFT (BRAKE) XPT**

**18v + 18v → 36v**

# 180/ 230mm High power Cordless Angle Grinder

**Angle cutting**  
(DGA700)

**17 cuts**

- Angle steel : 50x50mm
- Battery : BL1850B x2

**Single-pass cutting even 50mm angle steel**

(with DGA900)

**High performance and efficiency for heavy-duty grinding/cutting applications**

**Concrete cutting**

**6 m**

- Cutting depth : 20mm
- Battery : BL1850B x2

**BL MOTOR**

**Faster Cutting with High power and High torque brushless motor**

**Better gravity balance**

High maneuverability in any angle since it is possible to grab the center of gravity




**ADT**

**Automatic torque Drive Technology**

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

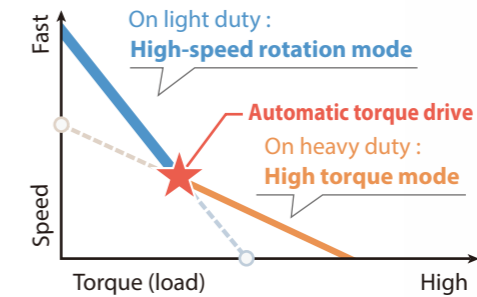

**(BRAKE)**

**Electric brake**

Electric brake is activated after the tool is switched off.

**Large switch lever**

with lock-off function (without lock-on function) Lock-off function prevents the switch lever from being accidentally pulled.


**Anti-restart function**

Even if battery is inserted, the motor does not start up when the switch is slide to "on".

**AFT**

**Active Feedback sensing Technology**

Shuts down the tool to protect the user, if the rotation speed suddenly slows down.

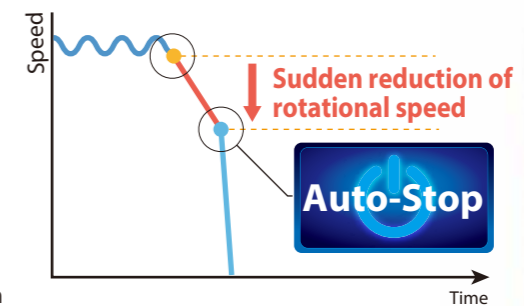

**XPT**  
EXTREME PROTECTION TECHNOLOGY

**Soft start**  
minimizes start-up shock, and makes the tool start smoothly.

**Ergonomically designed handle with soft grip**

**Battery guard**



**Anti-vibration rubber**  
provides less vibration, allowing comfortable operation.

**Battery indicator**

- Overheat protection
- Over-discharge protection

