
Go to Reservoir | makita

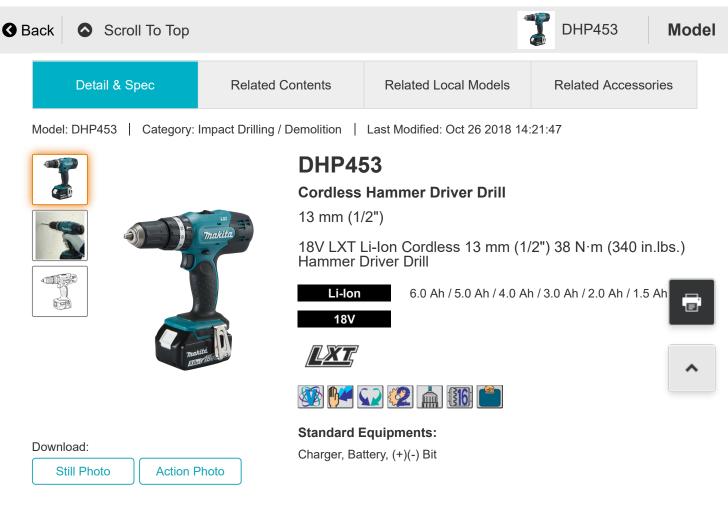

(=) Related Phrase

Note

Dolmar model:

MA model: XPH08

Optional accessories

Fast charger DC18RA

Charger DC24SA (for North

Charger DC24SC (for all cou

ntries except North America)

Battery BL1815

Battery BL1830


Charger DC18SD

America only)

Drill bits for wood

## Detail

- 18V LXT Li-Ion Cordless 13 mm (1/2") 38 N⋅m (340 in.lbs.) Hammer **Driver Drill**
- Compact and lightweight design
- Variable 2-speed design (0-400 & 0-1,300 RPM) covers a wide range of drilling, driving and hammer applications
- · All metal gear construction ensures high transmission durability
- · Single sleeve keyless chuck enables easy bit installation/removal with one hand
- Ergonomically designed rubberized soft grip provides more control and comfort
- Electric brake for maximum productivity and increased operator safety
- 16 Adjustable torque settings plus drill mode
- · Reversing switch is conveniently located
- Durable, reversible belt clip convenient for temporary tool hanging



Detail & Spec	Related Contents	Related Local Models		Related Accessories
Capacity	<b>Steel:</b> 13 mm (1/2")		Wood (Self-Feed Bit): 72 mm (2-13/ 16")	
	<b>Masonry:</b> 13 mm (1/2")		Adjustable Circle: 72 mm (2-13/16")	
	Flat Bit: 36 mm (1-7/16")		Formwork: 36 mm (1-7/16")	
	Forstner Drill Bit: 72 mm (2-13/16")		Hole Saw: 72 mm (2-13/16")	
	Multi-Siding Core Bit: 72 mm (2-13/ 16")		Ship Auger: 36 mm (1-7/16")	
	Single Spur Auger Bit: 36 mm (1-7/ 16")		Wood (Drill Bit): 36 mm (1-7/16")	
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")			
Impacts Per Minute (IPM)	High / Low: 0 - 19,500 / 0 - 6,000		<b>High:</b> 0 - 19,500	
	<b>Low:</b> 0 - 6,000			
No Load Speed (RPM)	<b>High / Low:</b> 0 - 1,300 / 0 - 400		<b>High:</b> 0 - 1,300	
	<b>Low:</b> 0 - 400			
Max Fastening Torque	Hard / Soft: 42 / 27 N·m			
Max Lock Torque	38 N·m (340 in.lbs.)			
Dimensions (L x W x H)	240 x 79 x 244 mm (9-7/16 x 3-1/8 x 9-5/8")			
Net weight	1.7 - 2 kg (3.6 - 4.4 lbs.)			