



Cordless Slide Compound Miter Saw
DLS211 AWS 305 mm (12")

High power similar to AC Tool
 For fast cutting and ripping

Max. cutting capacity (height x width)

92 x 382 (3-5/8" x 15") 107 x 363 (4-1/4" x 14-1/4")	Miter 45° left/right 92 x 268 (3-5/8" x 10-1/2") 107 x 255 (4-1/4" x 10")	Bevel 45° left 61 x 382 (2-3/8" x 15") 71 x 363 (2-13/16" x 14-1/4")	Bevel 45° left 61 x 268 (2-3/8" x 10-1/2") Miter 45° left/right 71 x 255 (2-13/16" x 10")	Upright cutting 203 (8")	Upright cutting 171 (6-3/4")
	Miter 60° left/right 92 x 185 (3-5/8" x 7-1/4") 107 x 178 (4-1/4" x 7")	Bevel 45° right 44 x 382 (1-3/4" x 15") 54 x 363 (2-1/8" x 14-1/4")	Bevel 45° right 44 x 268 (1-3/4" x 10-1/2") Miter 45° left/right 54 x 255 (2-1/8" x 10")	Horizontal cutting 320 (12-5/8")	Horizontal cutting 416 (16-3/8")

Accessories

Specialized EFFICUT blade
 Size (mm)
 305 x 2.15 x 30 x 24T
 Part No. B-67256



Vertical vise assembly
 Part No. 126617-2



Stand
 Part No. WST06



Horizontal vise assembly
 Part No. 122470-4



Dust bag assembly
 Part No. 122852-0



Stand
 Part No. WST05



Crown molding stopper set
 Part No. 192628-9



Stand
 Part No. 194043-3



Cordless Slide Compound Miter Saw

DLS211 / DLS212 305 mm (12")



- Brake
- Soft Start
- Bevel Cutting 45 LR
- Laser Marker
- Dust Collection

Blade Diameter 305 mm (12")
Miter Angle 60° L / 60° R
Bevel Angle 48° L / 48° R
Max Cutting Capacity
 90° Miter: 107 x 363 mm
 90° Miter: 92 x 382 mm
 45° Miter, L/R: 107 x 255 mm
 45° Miter, L/R: 92 x 268 mm

No Load Speed (RPM) 4,400
Sound Pressure Level 95 dB(A)
Sound Power Level 103 dB(A)
Vibration Level 2.5 m/s² or less
Dimensions (L x W x H) 898x690x725 mm
Net weight 30.7 - 31.3 kg

DLS211Z: No battery, charger

Standard Equipment: Hose 28-0.5 (245048-7), hose joint (459249-3), dust bag ass'y (122852-0), vise ass'y (126617-2), triangular rule (762001-3), hex. wrench 2.5 (783208-8), TCT blade 305X60T wood efficut (B-67452), hex. wrench 6 (781044-6).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 4-5-6, Block 16, 18L1-2 Đường số 3, KCN VSIP II, P. Hòa Phú, TP. Thủ Đức, Bình Dương
 ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, số 1, đường số 6, KCN - ĐT - DV VSIP Bắc Ninh, X. Phù Chấn, T.X. Từ Sơn, T. Bắc Ninh
 ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH ĐÀ NẴNG
 102 Triệu Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng
 ĐT: 0236 352 5079/ 0236 352 5179 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH CẦN THƠ
 226 Võ Văn Kiệt, P. An Thới, Q. Bình Thủy, TP. Cần Thơ
 ĐT: 0292-3894358 Fax: 0292-3894359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH BUỒN MA THUỘT
 60 Y Jut, P.Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk
 ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HẢI PHÒNG
 Số 15, Phố Phạm Hồng Thái, Q. Hồng Bàng, TP. Hải Phòng
 Điện thoại: 0225 8831 529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH NHA TRANG
 1053 Đường 2 tháng 4, P. Van Thanh, TP. Nha Trang, T. Khánh Hòa
 ĐT: 0258 3823 338

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HỒ CHÍ MINH
 Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh
 Điện thoại: 028 3821 5191



18V + 18V → 36V

BL MOTOR AWS ADT DXT

As powerful as AC model thanks to BL motor

High power for fast cutting and ripping

- 18V X2 Li-ion battery
- Brushless DC motor



One-touch Sliding lock
can be easily done by removing/ inserting the lock pin.

Independent laser switch



Excellent sliding durability of safety cover

Front knob for easy bevel angle adjustment


EFFICUT



Specialized EFFICUT blade

DXT

By redesigning Arm section shape, the precision at bevel cutting is increased.

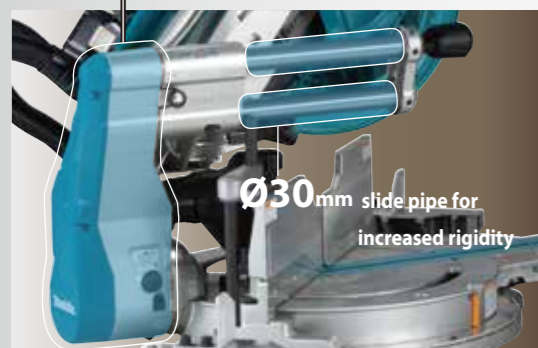

Ø30mm slide pipe for increased rigidity

Rail-forward design enables to be placed against a wall for maximizing work space

Motor head slides on fixed pipes without extending machine rear end, so the machine can be placed close to wall.

Conventional model

needed to set apart from the wall



DLS211


can be placed close to wall



ADT Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

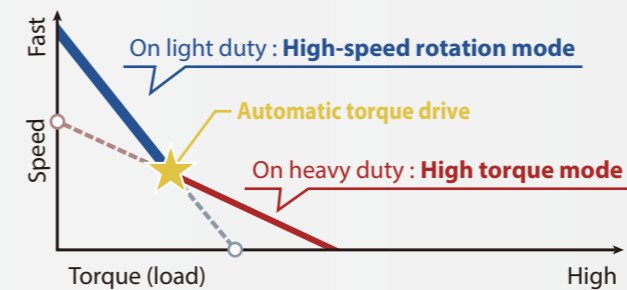

AWS Auto-start Wireless System (DLS211 only)



Wireless unit


Part No.
198901-5
198900-7(EU)
199393-1(Asia)

Bluetooth AWS connects to power tool with Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

Excellent dust collection

When cutting the low thin workpiece, the dust collecting is more effective than current model because of the improved dual dust collecting port.

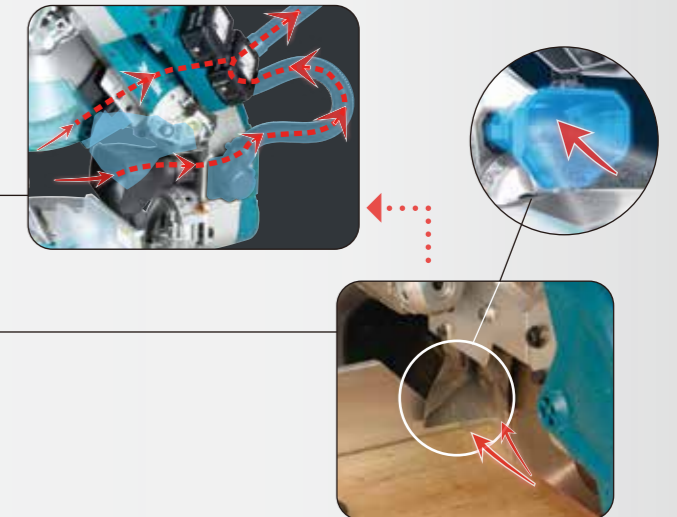


Large turn base

supports even large workpiece stably.

Easy-to-operate miter angle lock

Miter angle can be unlocked by turning Knob counterclockwise while pushing down Lock lever.

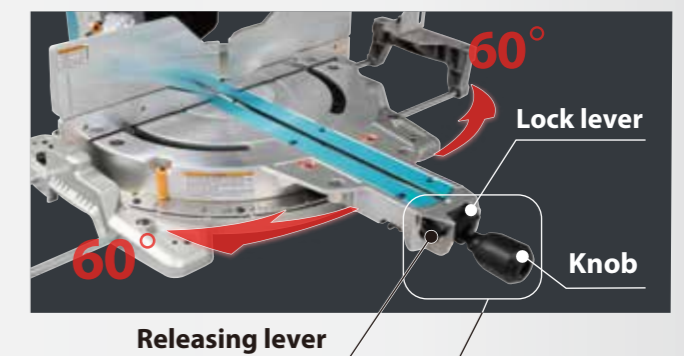

Once Releasing lever is pushed down:

- Turn base can be moved without pushing down Lock lever.
- The turning action is smooth because positive stops are released.
- Mitters 0°-60° left and right, with positive stops at 0°, 15°, 22.5°, 31.6°, 45° and 60° (left and right)