



Cordless Compound Miter Saw DLS600 165 mm (6-1/2")



LED job light



Carrying handle for easy transport to jobsite

Battery fuel gauge




Powered by 18V Li-ion batteries in series

- LXT**
- 1.5Ah BL1815N
 - 2.0Ah BL1820B
 - 3.0Ah BL1830B
 - 4.0Ah BL1840B
 - 5.0Ah BL1850B
 - 6.0Ah BL1860B
- 18V LITHIUM-ION**

Can be attached with a vacuum cleaner.



Mini sub fence provides wide guide support when performing vertical cut or left bevel cut.



Laser line function
Laser marker for easy tracing of ink line



Max. cutting capacity (mm) (height x width) with 165mm (6-1/2") saw blade

Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut
46 x 92 (1-13/16" x 3-5/8")	Miter: 45° left/ right 46 x 65 (1-13/16" x 2-9/16") Miter: 52° left/ right 46 x 56 (1-13/16" x 2-3/16")	Bevel: 45° left 30 x 92 (1-3/16" x 3-5/8") Bevel: 45° right 15 x 92 (9/16" x 3-5/8")	Bevel: 45° left / Miter: 45° left/ right 30 x 65 (1-3/16" x 2-9/16") Bevel: 45° right / Miter: 45° left/ right 15 x 65 (9/16" x 2-9/16")

Accessories T.C.T Saw Blade



Size (mm)	Plate (mm)	Kerf (mm)	Rake (degree)	Wood	Aluminum	Part No.
165 x 20 x 64T	1.4	1.9	10°	✓		B-56487
165 x 20 x 60T	1.2	1.8	5°		✓	B-56530

Cordless Compound Miter Saw DLS600Z 165 mm (6-1/2")

- Brake
 - Soft Start
 - Bevel Cutting 45 LR
 - Laser Marker
 - Dust Collection
 - Built-in Job Light
- Standard Equipment:** Vice (122940-3), dust bag (122884-7), triangular rule(762001-3), hex wrench 2.5 (783203-8), hex wrench 5 (783203-8), TCT saw blade 165X20X64T (B-56487).
- Items of standard equipment and specifications may vary by country or area. The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.*



Excellent portability

Suitable for Cutting Baseboard and Ceiling Trim, etc.

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 456, Block 16, 18/12 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, TP. Hồ Chí Minh, Việt Nam
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - DT - DV VSPP Bắc Ninh, P. Phú Châu,
TP. Từ Sơn, T. Bắc Ninh
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng,
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
368 Võ Văn Kiệt, Khu Vực 3, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ
ĐT: 0292 389 4398 Fax: 0292 389 4398

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BUƠN MA THUỘT
68 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk,
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Dị an Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng,
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH NHA TRANG
Lô 36-38 đường B6, Khu đô thị Vinh Biếm Trung, Xã Vinh Ngọc,
TP. Nha Trang, T. Khánh Hòa
ĐT: 0238 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,
ĐT: 0283 821 5191




shoulder strap for easy job site portability (option)




Part No. 166058-0

Compact and lightweight body

165 mm (6-1/2") Cordless Compound Miter Saw

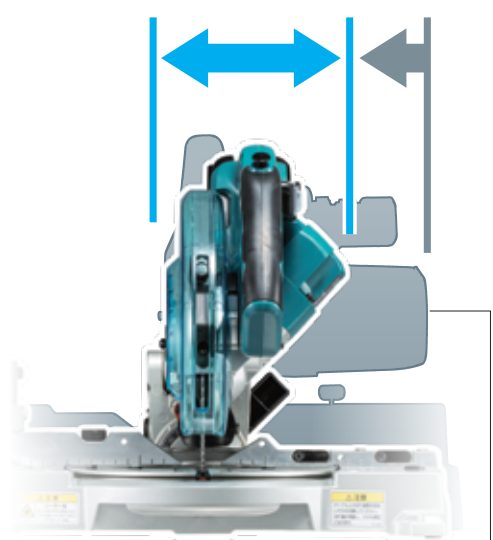

Our predecessor model 216mm Compound Miter Saw

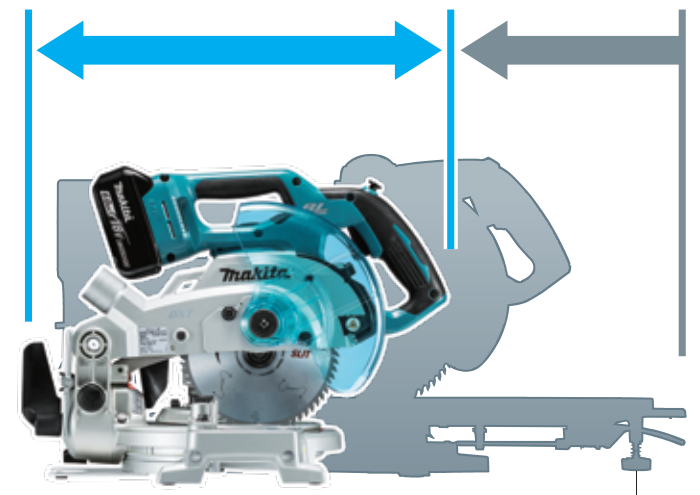

Our predecessor model 165mm Slide Compound Miter Saw

Crosscuts up to 46 x 92 mm at 90°
 suitable for cutting baseboard of max 90mm often used in construction site despite the compact body (Blade diameter: 165mm).



DXT

BL MOTOR


Powerful 5,000RPM



Excellent work amount

When using BL1860B, about 270 baseboards of 15x90mm can be cut by cutting at 45° bevel.

ADT

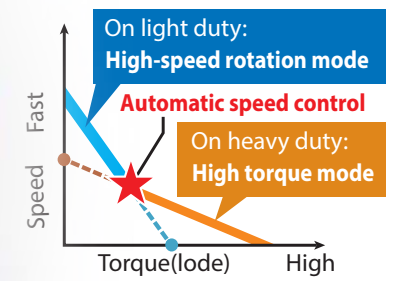

Automatic torque Drive Technology (ADT) adjusts speed and torque during operation for optimum performance



Double bevel design

The saw head can tilt left and right 0° to 45° (up to 46° when using release lever), enabling user to cut a workpiece without flipping it to match each corner.

