

Optimum weight balance for easy handling



LED job light

LED warning lamp for Battery capacity



Battery fuel gauge

(DPT353 only)



Contact arm mechanism + Low reaction force mechanism



Depth Adjustment

Anti-dry fire mechanism

Ergonomically designed grip

Li-ion Battery & Charging Time Reference, Compatibility Chart

DPT353	BL1815N 18V 1.5Ah	BL1820B 18V 2.0Ah with Battery fuel gauge	BL1830B 18V 3.0Ah with Battery fuel gauge	BL1840B 18V 4.0Ah with Battery fuel gauge	BL1850B 18V 5.0Ah with Battery fuel gauge	BL1860B 18V 6.0Ah with Battery fuel gauge	PT354D	BL1016 12Vmax 1.5Ah	BL1021B 12Vmax 2.0Ah with Battery fuel gauge	BL1041B 12Vmax 4.0Ah with Battery fuel gauge
DC18RC for 18V	15 min	24 min	22 min	36 min	45 min	55 min	DC10SB for 12Vmax	22 min	30 min	60 min
DC18SD for 18V	30 min	45 min	60 min	90 min	110 min	130 min	DC10WD for 12Vmax	50 min	70 min	130 min

Cordless Pin Nailer

DPT353Z/ PT354DSYJ/ PT354DSAJ/ PT354DZ

	DPT353	PT354D
Depth Adjustment	Length: 15, 18, 25, 30, 35 mm (5/8", 1 1/16", 1", 1-3/16", 1-3/8") Dia.: 0.6mm (1/32") Gauge: 23 Ga	Length: 15, 18, 25, 30, 35 mm (5/8", 1 1/16", 1", 1-3/16", 1-3/8") Dia.: 0.6mm (1/32") Gauge: 23 Ga
Auto Firing Stop	120	120
Built-in Job Light	2.5 m/s <sup>2</sup> or less 76 dB(A)	2.5 m/s <sup>2</sup> or less 76 dB(A)
Carrying Case	257x79x226mm BL1815N : 2.0 kg (4.4 lbs.) BL1860B : 2.3 kg (5.1 lbs.) <b>DPT353Z:</b> Battery & charger not include	231x66x226mm BL1016 : 1.8 kg (4.0 lbs.) BL1041B : 2.0 kg (4.4 lbs.) <b>PT354DSAJ:</b> 2 battery 2.0Ah (BL1021B), fast charger (DC10SB) <b>PT354DSYJ:</b> 2 battery 1.5Ah (BL1016), fast charger (DC10SB) <b>PT354DZ:</b> Battery & charger not include
<b>Standard Equipment :</b>	DPT353: (+) Truss head screw M4X12 (251314-2), hook (346317-0), nose adapter (424955-9), hex wrench 3 (783201-2). PT354D: Hook (346909-5), hex wrench 3(783201-2).	

Items of standard equipment and specifications may vary by country or area. weight according to EPTA-Procedure 01/ver.2.1

A4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC  
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu,  
TP. Từ Sơn, T. Bắc Ninh  
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH HÀ NỘI  
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,  
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH ĐÀ NẴNG  
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng,  
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH CẦN THƠ  
366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy,  
TP. Cần Thơ  
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH BUỒN MA THUỘT  
88 Lê Đức Thọ, P. Thắng Mỹ, TP. Buon Ma Thuột, T. Đắk Lắk,  
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH HẢI PHÒNG  
Số 01 Lê Duẩn, Di an Hoàng Huy Riverside, P. Thượng Lý,  
Q. Hồng Bàng, TP. Hải Phòng,  
ĐT: 0225 883 1519

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH NHA TRANG  
Lô 36-38 đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc,  
TP. Nha Trang, T. Khánh Hòa  
ĐT: 0259 220 0639

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG  
CHI NHÁNH HỒ CHÍ MINH  
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,  
ĐT: 0283 821 5191




Cordless Pin Nailer

DPT353



PT354D

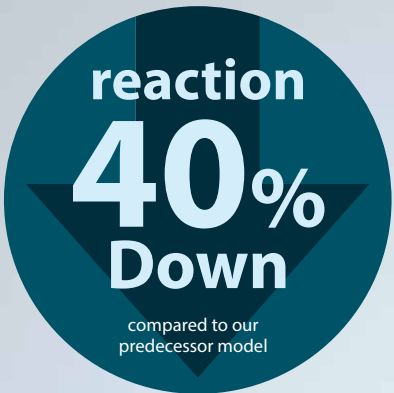

Low reaction force mechanism

prevent an incomplete nailing without pushing down the pin nailer tightly.







**DPT353**

Work volume on a single full battery charge

about **5,300** staple




**PT354D**

Work volume on a single full battery charge


about **1,000** staple

## Comfortable operation + Beautiful finish

### Counter Weight Mechanism

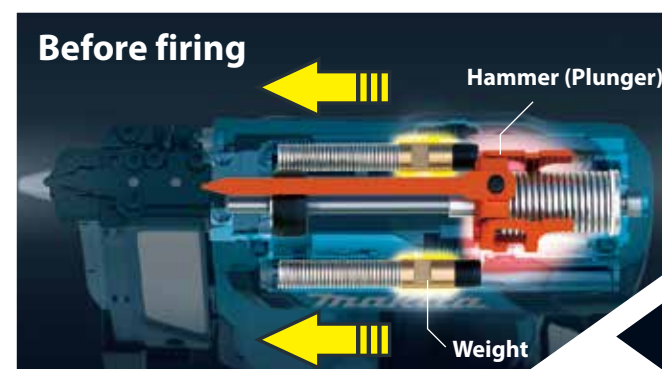

While hammer is pulled backward, weight moves forward.

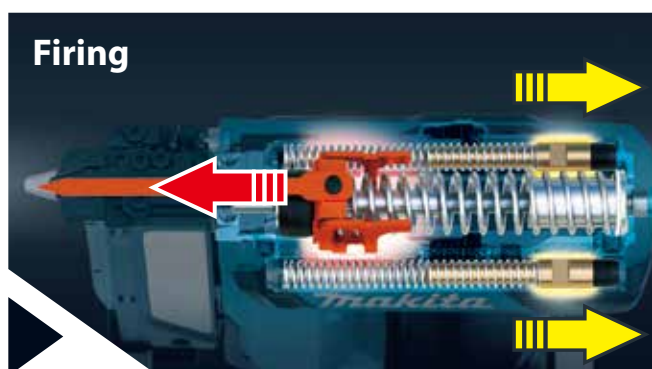

Hammer drives a pin nail into workpiece at a stroke and simultaneously weight moves backward. This unique mechanism reduces reaction at firing.



Photo : PT354D

Nose tip designed to provide better visibility

Fires both vertically and horizontally



Nails can be fired in the groove of baseboard.

Excellent corner firing

Redesigned bolt position enables to fire at very close to the wall.



Easy to exchange driver.



Photo : PT354D