


Accessories

Cutter blade set Replacing the cutting dice	Type		Cutting capacities	Part No.
	inch screw	Mild steel · Stainless steel		
	mm screw	Mild steel · Stainless steel	M6	199086-0
		Mild steel · Stainless steel	M8	199084-4
	Mild steel	M10	199082-8	

Shoulder strap



Cordless Threaded Rod Cutter DSC102 18V, 14.4V



More Compact & High Productivity

Makpac provides smart organization and easy transportation of power tools and accessories.

Multiple MAKPAC cases can be stacked and secured with latches and be carried on MAKPAC trolley.



Makpac Type1
Part No. 821549-5



Makpac Type2
Part No. 821550-0



Makpac Type3
Part No. 821551-8



Makpac Type4
Part No. 821552-6



Trolley

Part No. TR00000002
TR00000001(EU)



For Impact Driver

Threaded rod socket bit

By rotating the threaded rod inserted into the socket bit, the pins inside of the socket move towards the center of the socket along to the inner surface of the socket and grip the threaded rod tightly. With that state, able to screw the threaded rod by rotating the socket bit.




1/4"Hex (MZ)

Size	Length (mm)	Shank Type	Per pkg.	Part No.
M6	66	MZ-B	1	B-42961
M8	66	MZ-B	1	B-42977
M10	66	MZ-B	1	B-42983
3/8"	66	MZ-B	1	B-51611
M6,M8,M10	66	MZ-B	3	B-42999
3 x M6 (B-42961)				
3 x M8 (B-42977)				
2 x M10 (B-42983)	66	MZ-B	9	B-43022
1 x M6,M8,M10 (B-42999)				

Hollow socket bit

Able to screw nut to the middle of the threaded rod. Hollow inside makes the bit lighter.

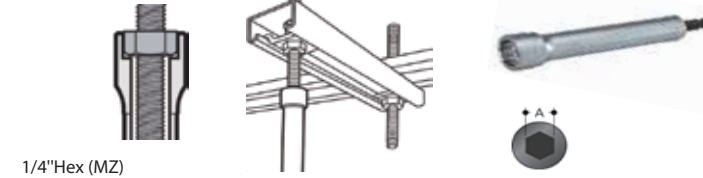

1/4"Hex (MZ)

A (mm)	Length (mm)	Shank Type	Per pkg.	Part No.	A (mm)	Length (mm)	Shank Type	Per pkg.	Part No.
10	75	MZ-B	1	B-52526	13	500	MZ-B	1	B-52607
10	150	MZ-B	1	B-52532	13	700	MZ-B	1	B-52613
10	300	MZ-B	1	B-52548	17	75	MZ-B	1	B-52629
10	500	MZ-B	1	B-52554	17	150	MZ-B	1	B-52635
10	700	MZ-B	1	B-52560	17	300	MZ-B	1	B-52641
13	75	MZ-B	1	B-52576	17	500	MZ-B	1	B-52657
13	150	MZ-B	1	B-52582	17	700	MZ-B	1	B-52663
13	300	MZ-B	1	B-52598					



Cuts up to M10



Cordless Threaded Rod Cutter DSC102Z 18V, 14.4V

- Brake
- Reversing
- Built-in Job Light
- Carrying Case

Capacity Steel: M6 - M10 mm (W3/8")
Vibration Level cutting threaded stainless steel rod (rod size W3/8): 2.5 m/s² or less
Sound Pressure Level 71 dB(A)
Dimensions (L x W x H) 199x103x308 mm (7-7/8"x4-1/16"x12-1/8")
Net weight 2.9 - 3.3 kg (6.4 - 7.3 lbs)

DSC102Z: Battery & charger are sold separately

Standard Equipment: Depth gauge (415486-9), blade cover (458380-2), hex wrench 4 (783202-0). (Tool does not come with blade)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Bắc Ninh, TP. Từ Sơn, T. Bắc Ninh, BT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
 65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội, BT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
 102 Triệu Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng, BT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
 366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ, BT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUƠN MA THUỘT
 88 Lê Đức Thọ, P. Thới An, TP. Buôn Ma Thuột, T. Đắk Lắk, BT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
 Số 01 Lê Duẩn, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng, BT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHÀ TRANG
 Lô 36-38 đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc, TP. Nhà Trng, T. Khánh Hòa, BT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
 Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh, BT: 0283 821 5191



Great tool balance and Lightweight


Overhead applications

Compact tool body



**BL
MOTOR**

Compact motor section with overall length of **177mm**



Excellent tool balance allows for operation with less wrist fatigue.

Stationary applications

Performs stable cutting even on the floor



Rod guide There are two rod guide positions.



◀ [1]
Size of threaded rod
W3/8, M10



◀ [2]
Size of threaded rod
M8, M6

Blade cover
Can be used as a rod support.

**Cutting capacities Mild steel : W3/8, M10, M8, M6
Stainless steel : W3/8, M8, M6**

High productivity per charge

Work volume on a single full battery charge (with BL1850B)

M8 Mild steel
about **2,300** rods

M8 Stainless
about **1,900** rods

M10 Mild steel
about **1,500** rods

Long life cutter blade

- High rigidity
- Double-edged blade

Both fixed blade and movable blade are double-edged and can be reversed as "new" ones.



Clean cut surface

Burr-free cuts allow for easy nut tightening.



Guide scale

Rod guide

LED job light



Automatic blade stop mechanism

When the blade reaches full open position, it does not close even if the switch trigger keeps being pulled.



Reversing switch lever

1. Cutting position
2. Lock position
3. Reversing position



Convenient metal hook

