




# Rebar and threaded rod flush cut at 3.5mm from the surface

**Cutting Capacity**  
Dia.: 10 - 25 mm

3.5mm

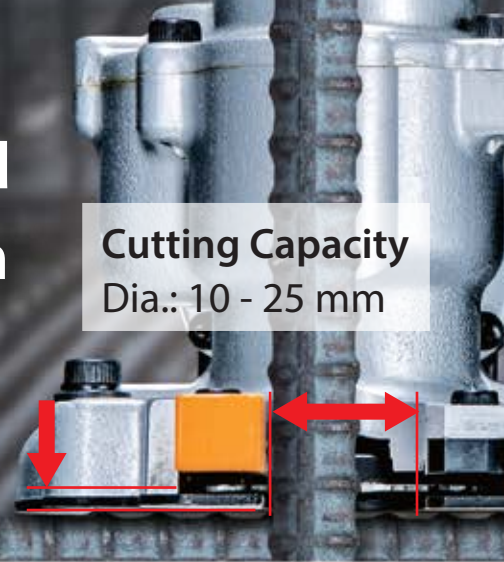


## ADT + BL MOTOR

Automatically changes the cutting speed according to load condition for an optimum operation

High power  
Brushless Motor

Highly visible heavy-duty fluorescent material guide

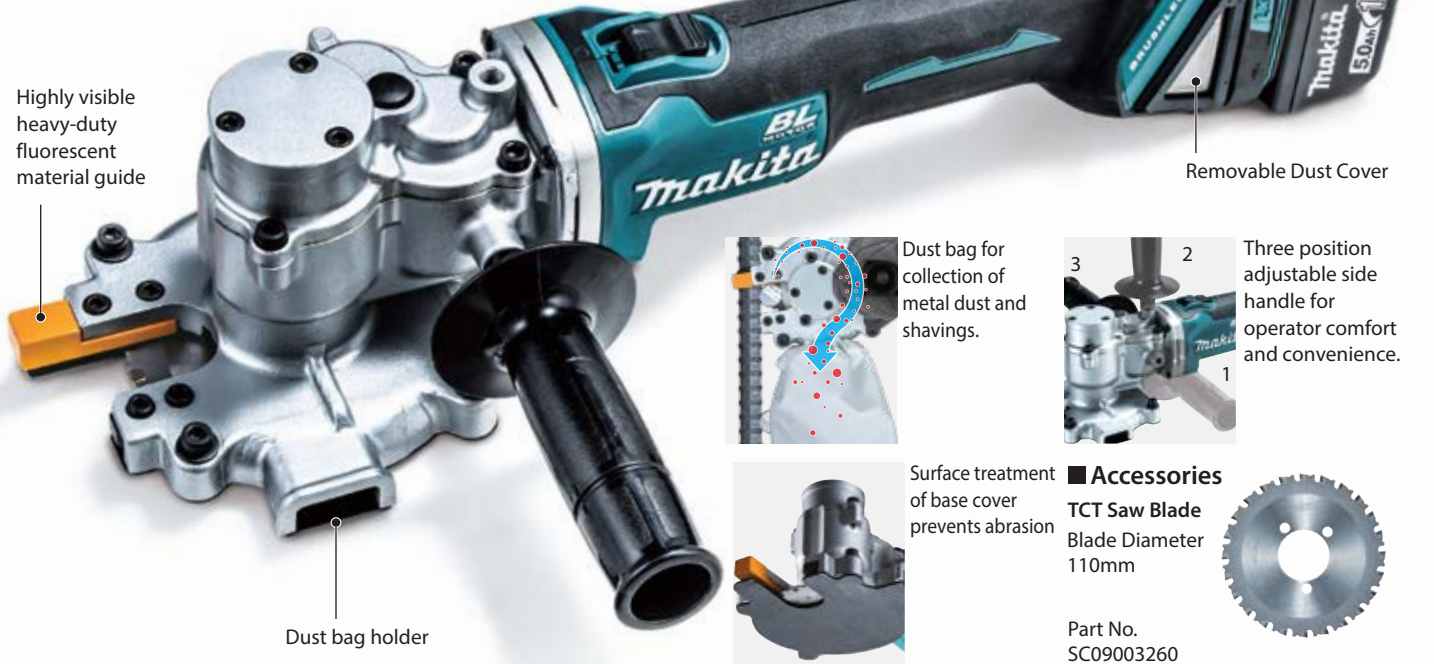

Battery fuel gauge

Removable Dust Cover

Dust bag holder



Dust bag for collection of metal dust and shavings.



Three position adjustable side handle for operator comfort and convenience.



Surface treatment of base cover prevents abrasion



**Accessories**  
TCT Saw Blade  
Blade Diameter 110mm

Part No.  
SC09003260  
SC09003261 (North America)

Cutting Capacity SD345(490N/mm <sup>2</sup> )	Work volume on a single full battery charge
D25	about 50 cuts
D19	about 90 cuts
D16	about 135 cuts
D13	about 200 cuts
D10	about 300 cuts

(with BL1850B)

### Cordless Steel Rod Cutter

Carrying Case

**Standard Equipment :**

TCT Saw Blade, Side Grip, Hex Wrench, Dust Bag, Battery, Charger

### DSC251

<b>Blade Diameter</b>	110 mm (4.3")
<b>Cutting Capacity</b>	Dia.: 10 - 25 mm (3/8" - 1")
<b>No load speed (rpm)</b>	2,200
<b>Vibration Level</b>	Cutting Rebar: 2.5 m/s <sup>2</sup> or less
<b>Sound Pressure Level</b>	78dB(A)
<b>Dimensions (L x W x H)</b>	471x137x139mm (18-17/32"x5-25/64"x5-15/32")
<b>Net weight</b>	4.0 kg (8.82 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014. Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201901



# Cordless Steel Rod Cutter DSC251



## Excellent flush cutting

Cut at 3.5mm from the surface

New blade



Easy installation of nuts  
without deburring

Cutting capacity range of  
10 - 25 mm standard rebar

