

18V
LITHIUM-ION

Makita



200+
TOOLS

6.0Ah 5.0Ah 4.0Ah
3.0Ah 2.0Ah 1.5Ah
18V Lithium-ion

LXT

Expand Your Lithium Line Up

Cordless Steel Rod Cutter



Protector
Protector prevents that cut pieces may fly off.



Cutting head rotates 360° to accommodate different cutting positions

Cordless Rebar Tying Tool DTR180Z

- Torque Setting 6
- Carrying Case

Tie Wire	ø0.8 mm
Applicable Rebars	D10 x D10 - (D13 x 2) x (D13 x 2)
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	78 dB(A)
Dimensions (L x W x H)	w/ BL1815N / BL1820B: 304x93x301 mm (12"x3-2/3"x11-7/8") w/ BL1830B / BL1840B / BL1850B / BL1860B: 304x93x318 mm (12"x3-2/3"x12-1/2")
Net weight	2.3 - 2.6 kg (5.1 - 5.7 lbs.)

DTR180Z : Battery & charger are sold separately

Standard Equipment : Wire guide B (140C95-0), (+) Truss head screw M4X12 (251314-2), hook (346449-3), hex wrench 2.5 (783208-8), nylon brush (162755-6).

Accessory

Tie wire set (ø0.8mm)
50 pcs/ box



Part No. 199137-9



Makita

Cordless Rebar Tying Tool
DTR180

LXT

Easier and faster
sequential rebar tying

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. M4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 456, Block 16, 18L1-2 Đường số 3, KCN VSP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu,
TP. Từ Sơn, T. Bắc Ninh,
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng,
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 3, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ,
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BUƠN MA THUỘT
88 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk,
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Di An Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng,
ĐT: 0283 821 5191

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH NHA TRANG
Lô 56-58 đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc,
TP. Nha Trang, T. Khánh Hòa
ĐT: 0259 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,
ĐT: 0283 821 5191

BL
MOTOR

XPT

18V
LITHIUM-ION

14.4V
LITHIUM-ION

Tying rebars automatically

Rebars can be tied automatically by only one hand in a various range of applications such as building concrete foundations.

Tying speed*
about
0.95
second

* D10 x D10, 2pcs of rebars, with 18V battery

Ø0.8mm Annealed tie wire dedicated for DTR180

Tie wire reel can be replaced simply by opening Reel cover.

Lock lever
Release lever

Easy to load with tie wire reel

1

Push the release lever



2

Put a reel and pass a wire through the hole



3

Release the lock lever



18V
LITHIUM-ION



Tying times per 1 charge*
about
5,300
times


1 Reel*
about
120
times

* D10 x D10, 2pcs of rebars, Battery : BL1850B

Compact and slim design

Enable to use in narrow areas

Center of gravity

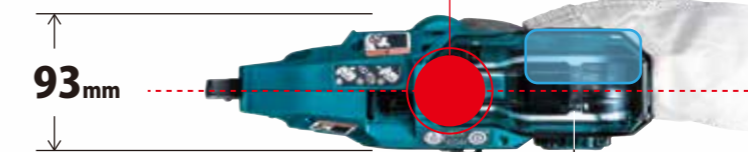

Easy to load with tie wire reel



BL
MOTOR **XPT**

Continuous actuation mode

Hold the trigger and pull the contact plate against rebars



Selectable 2-Modes



Single actuation
↑↓
Continuous actuation

Adjustable rebar tying strength

According to the condition of tying material, tying strength can be adjusted in 6 stages.



Applicable rebars : D10 x D10 - (D13 x 2) x (D13 x 2)

	Tying capacity (2 pcs of rebars)		
	D10 (#3)	D13 (#4)	D16 (#5)
D10(#3)	✓	✓	✓
D13(#4)	✓	✓	✓
D16(#5)	✓	✓	✓

	Tying capacity (3 pcs of rebars)			
	D10 (#3) x D10 (#3)	D13 (#4) x D13 (#4)		
D10(#3)	✓	✓		
D13(#4)	✓	✓		
D16(#5)	✓	-		

	Tying capacity (4 pcs of rebars)			
	D10 (#3) x D10 (#3)	D13 (#4) x D13 (#4)		
D10(#3) x D10(#3)	✓	✓		
D13(#4) x D13(#4)	✓	✓		

(# means perimeter length: mm)