



40Vmax series movie



40Vmax mechanism movie



This movie was filmed in Japan. Models and specs may vary by country.

Satisfy Professional's Needs



Cordless Demolition Hammer
HM002G



Adapted for SDS-MAX bits

Cordless Hammer Series



Demolition Hammer
HM002G



Rotary Hammer
HR006G



Demolition Hammer
HM001G

Rotary Hammer
HR005G

Combination Hammer
HR001G / HR002G / HR003G / HR004G



**Cordless /
More powerful
than corded
tools**

Accessories


Dust extractor attachment set

without Vacuum hose set

Part No. 199143-4

with Vacuum hose set

Part No. 199144-2

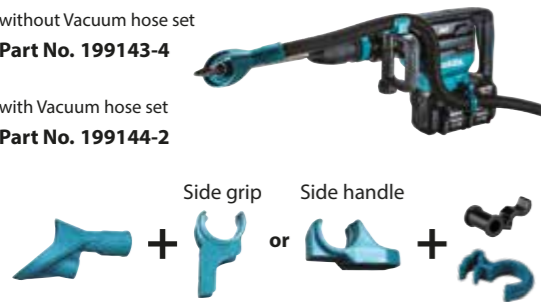

Side handle

Part No. 135269-8



Grease vessel set

for bit

Part No. 194683-7

198993-4 (EU)



Charging Time Reference

40Vmax	DC40RA	DC40RC
	Fast Charging	
BL4020 2.0Ah	22min	30min
BL4025 2.5Ah	28min	38min
*BL4040 4.0Ah	45min	67min
*BL4050F 5.0Ah	50min	85min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Cordless Demolition Hammer

HM002G Adapted for SDS-MAX bits

Variable Speed	Impact Energy	EPTA-Procedure 05/2009: 20.9 J
SDS-MAX Shank	Blows Per Minute (BPM)	950 - 1,900
Constant Speed	Shank Diameter	18 mm (11/16")
Soft Start	Sound Pressure Level	92 dB(A)
Built-in Job Light	Sound Power Level	103 dB(A)
Carrying Case	Vibration Level	Chiselling Function w/ Side Handle: 8.0 m/s ²
	Dimensions (L x W x H)	w/ BL4040: 574 x 146 x 324 mm (22-5/8 x 5-3/4 x 12-3/4")
		w/ BL4050F: 574 x 156 x 344 mm (22-5/8 x 6-1/8 x 13-1/2")
	Net weight	12.0 - 13.3 kg (26.5 - 29.3 lbs.)

Standard Equipment: Bull Point, Grease for bit, Side Handle, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

Impact energy
[EPTA-Procedure 05/2009]
**20.9
Joule**

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202103



40V Li-ion max + 40V Li-ion max **XGT X2** 80V max



High power and Low vibration



Impact energy
[EPTA-Procedure 05/2009]
20.9
Joule

Work amount (for 5 minutes)

Concrete with compressive strength of 40N/mm²
BL4040 x2 (on a full battery charge)

HM002G	115
AC tools	100
small	large

BL MOTOR High power brushless motor

Anti-Vibration Technology

Vibration level at main handle

8.0m/s²



AVT

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

Vibration absorbing housing isolates handle and motor.


Chipped concrete and measured the amount of concrete removed

Concrete with compressive strength of 40N/mm²
BL4040 x2 (on a full battery charge)

about **13 min**


SOFT NO LOAD

Suppression of motor speed during no-load



AWS Auto-start Wireless System


Connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

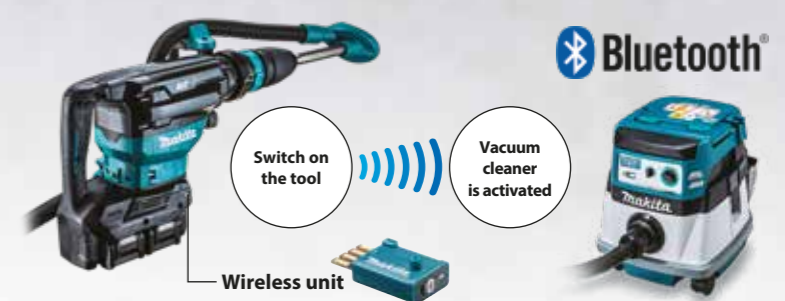

Adapted for SDS-MAX bits

12 bit angle settings

Twin LED job lights



Variable speed control dial



Slide lever for trigger lock-on / lock-off

Trigger lock-on/lock-off can be set simply by pushing the slide lever:

- For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
- For lock-off of the trigger, push the slide lever without pulling the trigger.

XPT
eXtreme
Protection
Technology

