




Cordless Rotary Hammer HR005G 40 mm (1-9/16") Adapted for SDS-Max bits

High Power
Durability
Digital Communication

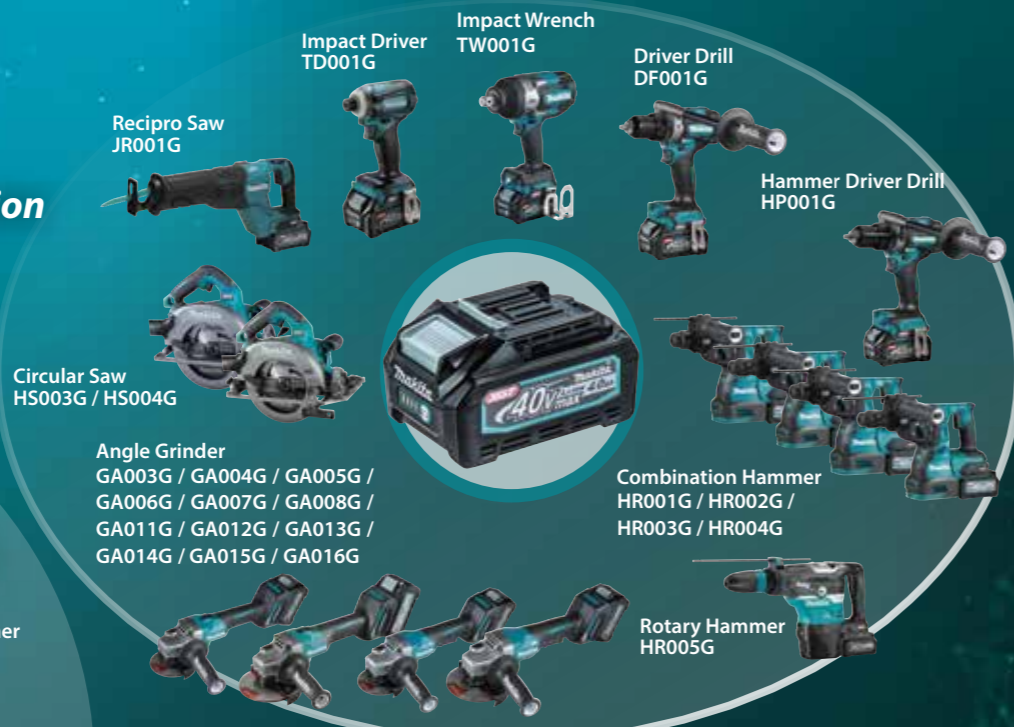

Circular Saw HS003G / HS004G

Angle Grinder GA003G / GA004G / GA005G / GA006G / GA007G / GA008G / GA011G / GA012G / GA013G / GA014G / GA015G / GA016G

Combination Hammer HR001G / HR002G / HR003G / HR004G

Rotary Hammer HR005G



XGT
40V Li-ion max

Impact energy [EPTA-Procedure 05/2009]
8.0 Joule

Portable Power Pack



Powered by up to four 18V LXT batteries



PDC1200 Equipped with built-in battery cells



Charger: DC4001

Charging time: 6hours

Adapter set (40Vmax)

Part No. 191N62-4




Accessories

Dust Extractor Attachment Set

Drilling / Hammering

Part No. 199142-6

Drilling mode



Hammering mode



Hammering

without Vacuum hose set Part No. 199143-4

with Vacuum hose set Part No. 199144-2



Cordless Rotary Hammer

HR005G 40 mm (1-9/16") Adapted for SDS-Max bits

Variable Speed	Impact Energy EPTA-Procedure 05/2009: 8 J
Brake	Capacity Concrete (w/ TCT Bit): 40 mm (1-9/16")
SDS-MAX Shank	Blows Per Minute (BPM) 1,450 - 2,900
Torque Limiter	No Load Speed (RPM) 250 - 500
Constant Speed	Sound Pressure Level 91 dB(A)
Soft Start	Sound Power Level 102 dB(A)
Dust Collection	Vibration Level Hammer Drilling into Concrete: 5.0 m/s ²
Built-in Job Light	Chiselling Function w/ Side Grip: 4.0 m/s ²
Carrying Case	Chiselling Function w/ Side Handle: 4.0 m/s ²
	Dimensions (L x W x H) w/o Battery: 477 x 115 x 286 mm (18-3/4 x 4-1/2 x 11-1/4")
	w/ BL4040: 500 x 115 x 286 mm (19-3/4 x 4-1/2 x 11-1/4")
	w/ BL4050F: 520 x 115 x 305 mm (20-1/2 x 4-1/2 x 12")
	7.4 - 8.2 kg (17.0 - 18.1 lbs.)
	Net weight
	HR005GZ: Battery & charger are sold separately
	HR005GM201: 2 battery 4.0Ah, fast charger (with Plastic case)
	Standard Equipment: Side grip (123138-5), side handle 73 (196792-8), grease vessel (194683-7), depth gauge (331955-1), cloth (443122-7).

As powerful as AC tools

Net weight

7.7 kg

with BL4040



The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. M4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh, BT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội, BT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng, BT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478


TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đình, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng, BT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh, BT: 0283 821 5191



Impact energy
[EPTA-Procedure 05/2009]
8.0
Joule

diameter 32mm (1-1/4") / Drilled holes to a depth of 140 mm / Concrete with compressive strength of 40N/mm²

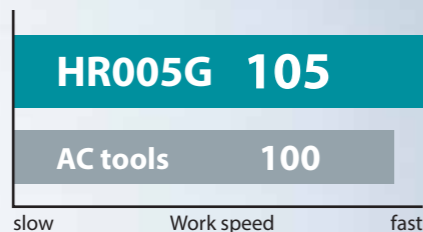

Anti-Vibration Technology

AVT Vibration level at main handle
5.0 m/s²

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.




SOFT NO LOAD




AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.

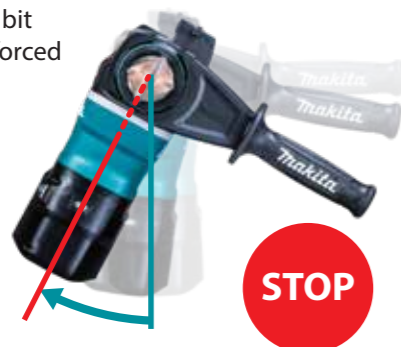

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

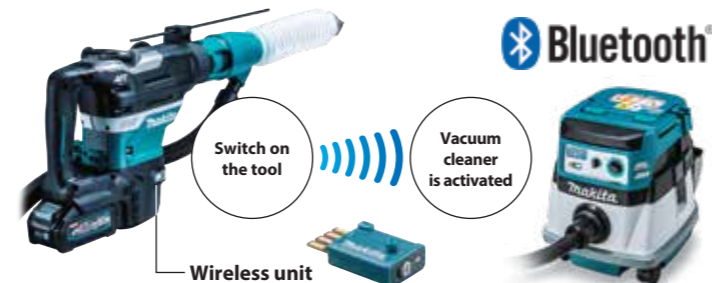

XPT eXtreme Protection Technology

protects the motor and gears from dust and debris.



Type

Side grip



Side handle



BL MOTOR