



40Vmax series movie



40Vmax mechanism movie



This movie was filmed in Japan. Models and specs may vary by country.



Cordless Rotary Hammer HR006G 52 mm (2-1/16")



Adapted for SDS-MAX bits

Cordless Hammer Series



Rotary Hammer HR006G



Demolition Hammer HM002G



Demolition Hammer HM001G



Rotary Hammer HR005G



Combination Hammer HR001G / HR002G / HR003G / HR004G



Cordless / More powerful than corded tools



Impact energy [EPTA-Procedure 05/2009]
21.4 Joule

Accessories

Dust extractor attachment set

Drilling / Hammering


Part No. 191N81-0



Hammering

without Vacuum hose set
Part No. 199143-4

with Vacuum hose set
Part No. 199144-2

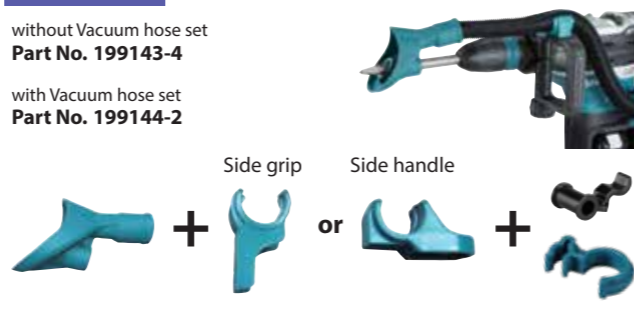

Charging Time Reference

	DC40RA Fast Charging	DC40RC	DC40RB
BL4020 2.0Ah	22min	30min	
BL4025 2.5Ah	28min	38min	
BL4040 4.0Ah	45min	67min	
BL4050F 5.0Ah	50min	85min	

Cordless Rotary Hammer

HR006G 52 mm (2-1/16") Adapted for SDS-MAX bits

Variable Speed	Impact Energy	EPTA-Procedure 05/2009: 21.4 J
Brake	Capacity	Concrete (w/TCT Bit): 52 mm (2-1/16") Concrete (w/ Core Bit): 160 mm (6-5/16")
SDS-MAX Shank	Blows Per Minute (BPM)	1,100 - 2,250
Torque Limiter	No Load Speed (RPM)	150 - 310
Constant Speed	Sound Pressure Level	99 dB(A)
Soft Start	Sound Power Level	110 dB(A)
Built-in Job Light	Vibration Level	Chiselling Function w/ Side Handle: 7.0 m/s ² Chiselling Function w/ Side Grip: 7.0 m/s ² Hammer Drilling into Concrete: 8.5 m/s ²
Carrying Case	Dimensions (L x W x H)	w/ BL4040: 610 x 140 x 337 mm (24 x 5-1/2 x 13-1/4")
	Net weight	12.9 - 14.3 kg (28.4 - 31.5 lbs.)

HR006GZ: Battery & charger are sold separately
Standard Equipment: Side grip (135629-4), side handle 90 (135283-4), grease vessel (194683-7), depth gauge (331955-1), cloth (443122-7).

*1 Recommended battery
The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

M4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
1102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đức Thọ, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191



40V_{max} Li-ion + 40V_{max} Li-ion **XGT X2** 80V_{max}



Impact energy
[EPTA-Procedure 05/2009]

21.4
Joule



Drilling speed*
about **27%**
UP

Drilling speed

HR006G **127**

AC tool **100**

slow speed fast

Work amount*
[Drilling]
about **44** pcs

*on a full battery charge / with battery: BL4040 x2 / concrete with compressive strength of 40N/mm² / drilled holes to a depth of 140 mm / Ø18mm

2 mode
Rotation + Hammering
↕
Hammering

AVT

ANTI VIBRATION TECHNOLOGY

Vibration level at main handle

8.5 m/s²

A Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

B Vibration absorbing housing isolates handle and motor.

C Damper spring absorbs impact vibrations from the drill bit.

SOFT NO LOAD Suppression of motor speed during no-load

XPT
eXtreme Protection Technology



AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



BL MOTOR

Variable speed control dial