



40Vmax series movie



40Vmax mechanism movie



This movie was filmed in Japan. Models and specs may vary by country.

Satisfy Professional's Needs



Cordless Rotary Hammer
HR006G 52 mm (2-1/16")

Adapted for SDS-MAX bits

Cordless Hammer Series




Accessories

Dust extractor attachment set

Drilling / Hammering

Part No. 191N81-0

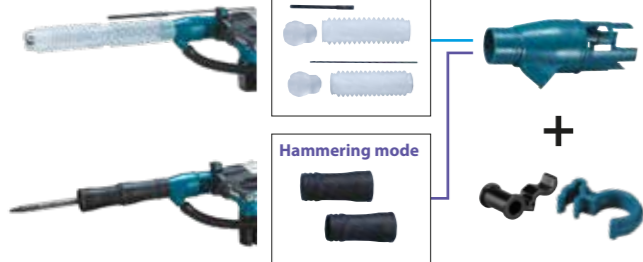

Hammering

without Vacuum hose set
Part No. 199143-4

with Vacuum hose set
Part No. 199144-2



Charging Time Reference

| | DC40RA Fast Charging | DC40RC DC40RB |
|----------------|-------------------------|------------------|
| BL4020 2.0Ah | 22min | 30min |
| BL4025 2.5Ah | 28min | 38min |
| *BL4040 4.0Ah | 45min | 67min |
| *BL4050F 5.0Ah | 50min | 85min |

*1 Recommended battery

Cordless Rotary Hammer

HR006G 52 mm (2-1/16") Adapted for SDS-MAX bits

| | | |
|--------------------|-------------------------------|---|
| Variable Speed | Impact Energy | EPTA-Procedure 05/2009: 21.4 J |
| Brake | Capacity | Concrete (w/ TCT Bit): 52 mm (2-1/16") Concrete (w/ Core Bit): 160 mm (6-5/16") |
| SDS-MAX Shank | Blows Per Minute (BPM) | 1,100 - 2,250 |
| Torque Limiter | No Load Speed (RPM) | 150 - 310 |
| Constant Speed | Sound Pressure Level | 99 dB(A) |
| Soft Start | Sound Power Level | 110 dB(A) |
| Built-in Job Light | Vibration Level | Chiselling Function w/ Side Handle: 7.0 m/s ² Chiselling Function w/ Side Grip: 7.0 m/s ² Hammer Drilling into Concrete: 8.5 m/s ² |
| Carrying Case | Dimensions (L x W x H) | w/ BL4040: 610 x 140 x 337 mm (24 x 5-1/2 x 13-1/4") |
| | Net weight | 12.9 - 14.3 kg (28.4 - 31.5 lbs.) |

Standard Equipment : Side Handle, Side Grip, Depth Gauge, Grease vessel

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**Cordless /
More powerful
than corded
tools**

Impact energy
[EPTA-Procedure 05/2009]
**21.4
Joule**



Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202102



40V_{max} Li-ion + 40V_{max} Li-ion **XGT X2** 80V_{max}



Impact energy
[EPTA-Procedure 05/2009]

21.4
Joule



Drilling speed*

about **27%**
UP

Drilling speed

HR006G **127**

AC tool **100**

slow speed fast

Work amount*
[Drilling]

about **44** pcs

*on a full battery charge / with battery: BL4040 x2 / concrete with compressive strength of 40N/mm² / drilled holes to a depth of 140 mm / Ø18mm

2 mode
Rotation + Hammering
↕
Hammering

AVT

ANTI VIBRATION TECHNOLOGY

Vibration level at main handle

8.5 m/s²

A Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

B Vibration absorbing housing isolates handle and motor.

C Damper spring absorbs impact vibrations from the drill bit.

SOFT NO LOAD Suppression of motor speed during no-load

XPT
eXtreme Protection Technology



AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



Type

Side grip



Side handle



Twin LED job lights



BL
MOTOR

Variable speed control dial

