


■ Various options



High Pressure Washer
HW1300 / HW1200

Easy pressure adjustment and Self-Priming function

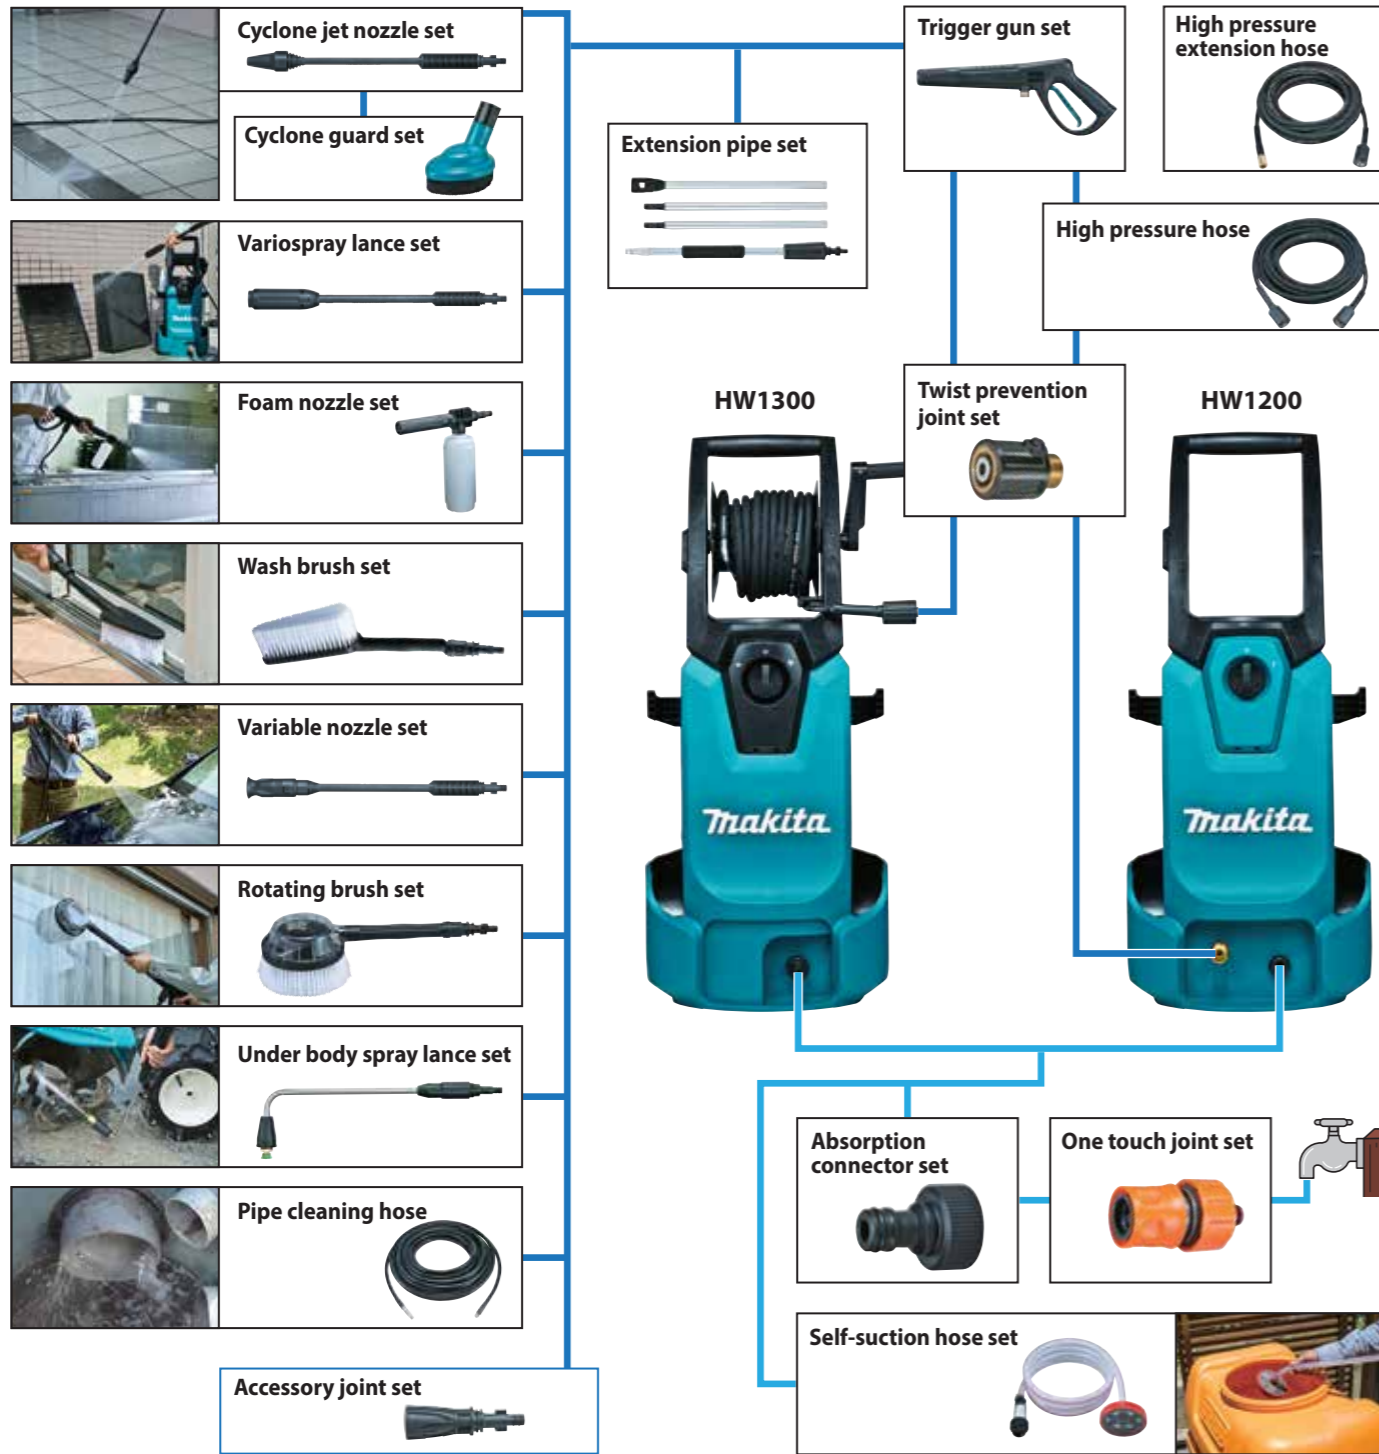

Simple function type
HW1200

High function type
2-pressure selection / Hose Reel
HW1300

High Pressure Washer	HW1300 / HW1200	
	HW1300	HW1200
Double Insulation		
Continuous rating input	1,800W	1,800W
Max Pressure	13 MPa (130 bar, 1,885 PSI)	12 MPa (120 bar, 1,740 PSI)
Max Flow Rate	450 L/h	420 L/h
Max Feed Temperature	40 °C (104 °F)	40 °C (104 °F)
High Pressure Hose Length	10 m (33 ft.)	10 m (33 ft.)
Sound Pressure Level	76 dB(A)	72 dB(A)
Vibration Level	4.86 m/s ²	4.11 m/s ²
Dimensions (L x W x H)	292x358x830 mm(11-1/2"x14-1/8"x32-3/4")	292x358x830 mm(11-1/2"x14-1/8"x32-3/4")
Net weight	12.7 kg (28.0 lbs.)	11.0 kg (24.3 lbs.)
Power supply cord	5.0 m (16.4 ft.)	5.0 m (16.4 ft.)

Standard Equipment : Trigger Gun, Vario-Power Spray Lance, Cyclone jet nozzle, Detergent Bottle, Cleaner Pin, Coupling Sleeve, High Pressure Hose 10 m, Water Hose Connector, Foam Nozzle, Connector

Items of standard equipment and specifications may vary by country or area. weight according to EPTA-Procedure 01/ver.2.1

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201802

Eco-friendly for reduced water



Photo : HW1300

Powerful Washing

Uses up to 80% less water than a garden hose



Low noise mode

HW1300



About 10 % less noise and 20% less amount of water than high mode



Pressure adjustable function for easy and quick control by turning the handle

HW1300

HW1200

Variospray lance

enables not only high pressure washing, but also low pressure washing for screen door, air conditioner, car body...and so on



High pressure

Low pressure

Self-priming function

■ suction hose set



Various options

HW1300

HW1200



Photo : HW1300

High Pressure Washer



HW1300

High function type

2-pressure selection / Hose Reel

Hose Reel

Pressure hose can be wound around for easy and quick preparation/cleaning up.

Max pressure

13 MPa
(220-240V)

Max permissible flow

7.5 L/min



HW1200

Simple function type

Max pressure

12 MPa
(220-240V)

Max permissible flow

7.0 L/min

Lightweight

HW1300

HW1200

12.7 kg

11.0 kg