




Cordless Impact Driver TD112D



135 N·m of Max Torque from a compact body

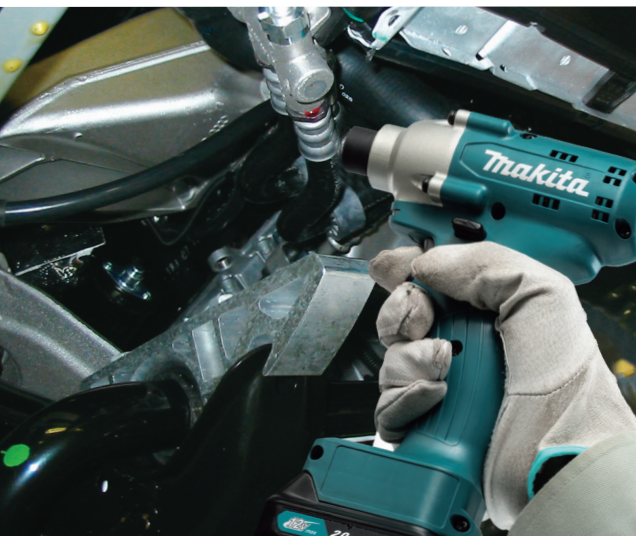

Rubberized bit sleeve
protects workpiece from scratches and damage.

Minimized bit wobbling
Bit wobbling is minimized by using two ball bearings as a new anvil holder.

Single LED job light
with preglow and afterglow functions

Variable speed control switch
with a trigger having a short pull length to reach full speed

Impact power selection

Max fastening torque:
135 N·m **80 N·m**
Hard impact mode Soft impact mode

Auto-stop system

Indication lamp warn assembly worker visually and audibly of battery power reduction. If battery power reduces further, the motor automatically stops to prevent incomplete fastening.



Accessories

Protector

Part No. 422718-7



Hook

Part No. 281012-4



Cordless Impact Driver TD112D

Variable Speed	Capacity	High Strength Bolt: M5 - M12 (3/16 - 1/2") Standard Bolt: M5 - M14 (3/16 - 9/16")
Brake	Hex Shank	6.35 mm (1/4")
Reversing	Center Height	25 mm
Electronic 2-Speed	Impacts Per Minute (IPM)	Hard / Soft: 0 - 3,900 / 0 - 3,300
Built-in Job Light	No Load Speed (RPM)	Hard / Soft: 0 - 3,000 / 0 - 2,000
	Max Fastening Torque	Hard / Soft: 135 / 80 N·m (1,200 / 700 in.lbs.)
	Sound Power Level	104 dB(A)
	Sound Pressure Level	93 dB(A)
	Vibration Level*	10.9 m/s ²
	Dimensions (L x W x H)	w/ BL1016/BL1021B: 145 x 64 x 221 mm (5-3/4 x 2-1/2 x 8-3/4") w/ BL1041B: 145 x 64 x 240 mm (5-3/4 x 2-1/2 x 9-1/2") w/o Battery: 145 x 52 x 195 mm (5-3/4 x 2-1/16 x 7-5/8")
	Net weight	0.99 - 1.2 kg (2.2 - 2.6 lbs.)

*Impact tightening of fasteners of the maximum capacity of the tool

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202108