



**Cordless Driver Drill**  
**Cordless Hammer Driver Drill**  
**Cordless Impact Driver**



**12V<sub>max</sub>**  
**LITHIUM-ION**



**Powered by Slide Li-ion Battery of Makita's New 12Vmax Platform**



10mm (3/8") Single-sleeve keyless chuck (DF331D, HP331D)

18 Torque Settings

Single LED job light with pre-glow and afterglow functions

Variable speed control by trigger

Mechanical 2-speed transmission

**Best possible ergonomic handle for driver-drill applications**



**A** In order to provide maximum thrust to the bit, the top back of the handle is ergonomically contoured and widened according to the U-shape formed between user's thumb and index finger.

**B** Ribbed rubber grip enables all finger tips to hold the handle securely against the strong rotational force of counter torque even in single-handed operation.



Photo: HP331D

Cordless Driver Drill		DF331D / DF031D 10mm (3/8")	
Torque Setting 18	Reversing	<b>Capacity</b>	<b>DF331D</b> Steel: 10mm (3/8") Wood: 21mm (13/16") Hi: 0-1,700 Lo: 0-450 <b>DF031D</b> Steel: 10mm (3/8") Wood: 21mm (13/16") Hi: 0-1,700 Lo: 0-450
Brake	Built-in Job Light	<b>No load speed (rpm)</b>	<b>DF331D</b> Hard / Soft: 30 / 14N·m 28N·m (250in.lbs) <b>DF031D</b> Hard / Soft: 30 / 14N·m 28N·m (250in.lbs)
Mechanical 2-Speed	Carrying Case	<b>Max tightening torque</b>	<b>DF331D</b> 189x66x209mm (7-7/16"x2-5/8"x8-1/4") 1.1kg (2.4lbs) with BL1021B 1.3kg (2.8lbs) with BL1041B <b>DF031D</b> 157x66x209mm (6-3/16"x2-5/8"x8-1/4") 0.94kg (2.1lbs) with BL1021B 1.1kg (2.4lbs) with BL1041B
Variable Speed		<b>Max lock torque</b>	
		<b>Dimensions (L x W x H)</b>	
		<b>Net weight*</b>	

*Standard Equipment* : Battery, Charger, Battery cover, Belt clip, Phillips bit

Cordless Hammer Driver Drill		HP331D 10mm (3/8")		Cordless Impact Driver		TD110D	
Torque Setting 18	<b>Capacity</b>	Variable Speed	<b>Capacity</b>	Brake	<b>Capacity</b>	Reversing	<b>Capacity</b>
Brake	<b>Impacts per minute (ipm)</b>	Brake	<b>Machine screw:</b>	Reversing	<b>Machine screw:</b>	Built-in Job Light	<b>Machine screw:</b>
Mechanical 2-Speed	<b>No load speed (rpm)</b>	Reversing	M4 - M8mm (5/32" - 5/16")	Built-in Job Light	M4 - M8mm (5/32" - 5/16")	Carrying Case	M4 - M8mm (5/32" - 5/16")
Variable Speed	<b>Max tightening torque</b>	Built-in Job Light	Standard bolt:	Carrying Case	Standard bolt:		Standard bolt:
Reversing	<b>Max lock torque</b>		M5 - M12 (3/16" - 1/2")		M5 - M12 (3/16" - 1/2")		M5 - M12 (3/16" - 1/2")
Built-in Job Light	<b>Dimensions (L x W x H)</b>		High strength bolt:		M5 - M10 (3/16" - 3/8")		High strength bolt:
Carrying Case	<b>Net weight*</b>		Coarse thread (in length):		22 - 90mm (7/8" - 3-1/2")		Coarse thread (in length):
			22 - 90mm (7/8" - 3-1/2")				22 - 90mm (7/8" - 3-1/2")

*Standard Equipment* : Battery, Charger, Battery cover, Belt clip, Phillips bit

\*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.



**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201509



# Fast Charging 22 minutes

DC10SB  
to fully charge a 1.5Ah slide  
Li-ion battery



DC10SB

Developed specially for charging  
the slide Li-ion batteries of  
new 12Vmax platform

# Compact eXtreme Technology

Increased motor power for higher application  
speed and max tightening torque



## Cordless Driver Drill

DF331D  
DF031D


6.35mm (1/4")  
Hex chuck

No load speed:  
0-1,700rpm  
Max tightening torque:  
30N·m (270in·lbs)  
(Hard joint)



### Forced air cooling system DC10SB only

- Stand-by time until the charge starts can be greatly shortened by using charger DC10SB equipped with a built-in cooling fan.
- Effectively cools down every battery cell with the forced air cooling system and the heat sinks.

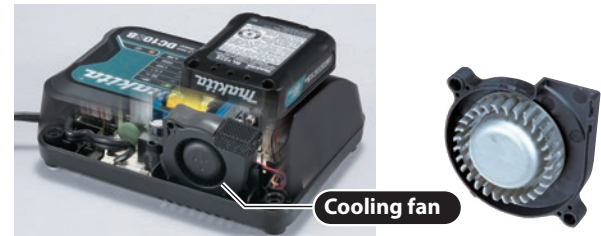

Cooling fan

### Compact and lightweight design

DC10WD provides higher charging performance than DC10WA, but with a more compact and lightweight design. It's same charging time (50min.) as DC10WA for 1.3Ah battery although the new battery is 1.5Ah.



### Multi-Contact Slide-type Terminal

- Ensures stable contact with tool even under extreme vibration.
- Allows tools to be equipped with an ergonomic handle design.



### Wall mountable for charging

can be mounted on the wall for charging, allowing the user to obtain maximum working space on workbench.



### Charging status indicator

shows the charging status of a battery being charged in 2 stages: less than 80% and 80% or more.



### Li-ion Battery & Charger Time Reference, Compatibility Chart

12Vmax LITHIUM-ION	BL1016 12Vmax 1.5Ah	BL1021B 12Vmax 2.0Ah with Battery fuel gauge	BL1041B 12Vmax 4.0Ah with Battery fuel gauge
	DC10SB for 12Vmax	22 min	30 min
DC10WD for 12Vmax	50 min	70 min	130 min

### Battery fuel gauge

(BL1021B, BL1041B)

The power remaining in the battery can be indicated in 4 stages simply by pushing a button.



Push button

Battery fuel gauge  
(4 stage LED)



## Cordless Hammer Driver Drill

HP331D

No load speed: 0-1,700rpm  
Max tightening torque:  
30N·m (270in·lbs) (Hard joint)



## Cordless Impact Driver

TD110D

No load speed: 0-2,600rpm  
Max tightening torque:  
110N·m(970in·lbs) (Hard joint)

