




High Power

Durability

Digital Communication

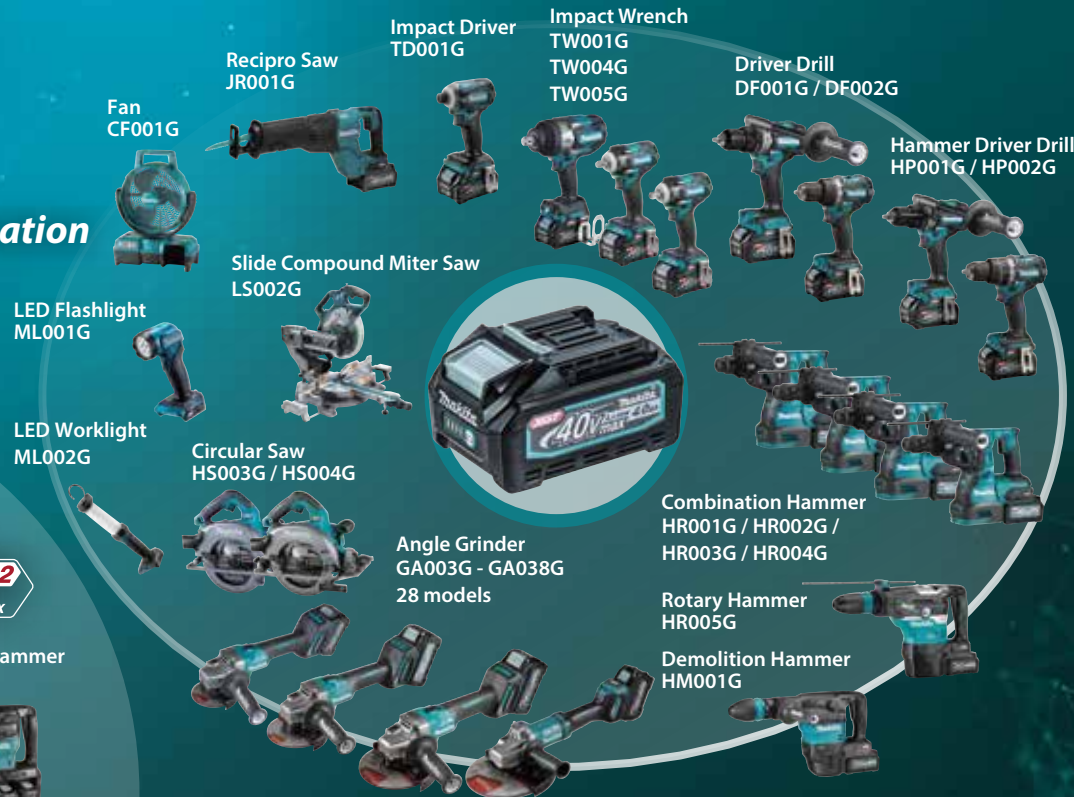

Cordless Angle Grinder
GA037G 180 mm (7")
GA038G 230 mm (9")

Satisfy Professional's Needs



40V Li-ion max

High Power for Heavy Duty



Compatible battery and Portable Power Pack

Portable Power Pack

PDC01¹ Powered by up to four 18V LXT batteries



PDC1200¹ (PDC1200A02)

1,200 Wh high capacity
Approx. 8times more
capacity than BL4040

Equipped with
built-in battery cells
Charger: DC4001
Charging time: 6hours



Adapter set (40Vmax)

Part No. 191N62-4



Battery Charging Time Reference

	DC40RA (Fast Charging)	DC40RC
BL4050F 5.0Ah	50min	85min
BL4040 4.0Ah	45min	67min
BL4025 2.5Ah	28min	38min

¹ Recommended battery

Accessories

Dust collecting wheel guard

GA037G: Part No. 198514-2
Max cutting depth: 35mm
GA038G: Part No. 198440-5
Part No. 198379-2
(Limited quantity)
Part No. 198380-7
(Limited quantity)

Max cutting depth: 60mm



Wheel cover for cut-off wheel

GA037G: 122914-4
GA038G: 122913-6



Dust collection wheel guard

for 180mm cup diamond wheel

Part No. : 195384-0



Vibration proof grip set

Part No. 194543-3



Cordless Angle Grinder

GA037G 180 mm (7") , GA038G 230 mm (9")

	GA037G / GA038G
Brake	
Soft Start	
Dust Collection	
Carrying Case	
Standard Equipment: Vibration proof grip (162264-5), lock nut wrench (782034-2), toolless wheel cover 230F (GA038G) (127714-7) toolless wheel cover 180F (GA037G) (127713-9)	
GA037GZ05, GA038GZ05: Battery & charger are sold separately	
Wheel Diameter	180 mm (7") / 230 mm (9")
Hole Diameter	22.23 mm (7/8")
No Load Speed (RPM)	7,800 / 6,600
Circumference of Grip Portion	154 mm (6-1/16")
Vibration Level	Surface Grinding w/ Anti-Vibration Side Grip: 7.5 m/s ² Surface Grinding w/ Normal Side Grip: 7.5 m/s ² / 7 m/s ²
Sound Pressure Level	88 dB(A) / 87 dB(A)
Sound Power Level	99 dB(A) / 98 dB(A)
Dimensions (L x W x H)	w/o Battery: 442 x 200 x 156 mm (17-3/8 x 7-7/8 x 6-1/8") / 442 x 250 x 156 mm (17-3/8 x 9-7/8 x 6-1/8") w/ BL4025: 497 x 200 x 156 mm (19-1/2 x 7-7/8 x 6-1/8") / 97 x 250 x 156 mm (19-1/2 x 9-7/8 x 6-1/8") w/ BL4040: 509 x 200 x 164 mm (20 x 7-7/8 x 6-1/2") / 509 x 250 x 164 mm (20 x 9-7/8 x 6-1/2") w/ BL4050F: 535 x 200 x 180 mm (21 x 7-7/8 x 7-1/8") / 535 x 250 x 180 mm (21 x 9-7/8 x 7-1/8")
Net weight	4.4 - 5.4 kg (9.7 - 11.9 lbs.) / 4.6 - 7.4 kg (10.1 - 16.3 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. **Items of standard equipment and specifications may vary by country or area.**

A4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu,
TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
368 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BUỒN MA THUỘT
88 Lê Đức Thọ, P. Thắng Mỹ, TP. Buôn Ma Thuột, T. Đắk Lắk.
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Di an Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH NHA TRANG
Lô 36-38 đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc,
TP. Nha Trang, T. Khánh Hòa
ĐT: 0259 220 0639

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191



High power 15%* faster

provides higher wheel rotation speed when heavily loaded, increasing the work efficiency by approx 15%* compared with Predecessor Models.

Concrete cutting

5m*


Cutting depth: 30mm

*with BL4050F



Increased maneuverability

- More lightweight design than predecessor model, which is achieved by using one XGT battery
- Overall length shorter than competitors, which increases maneuverability in overhead or horizontal applications.

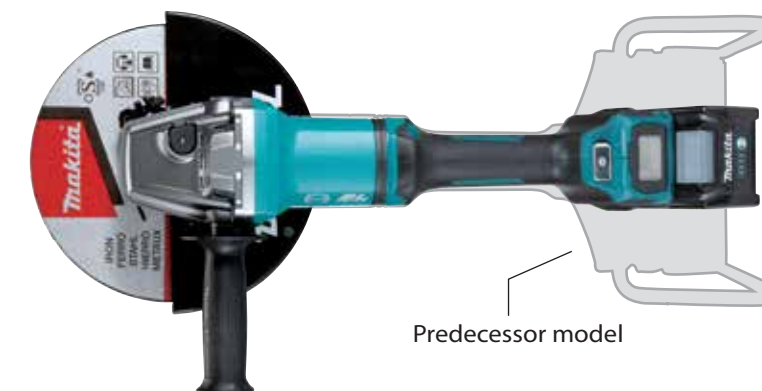

NEW toolless wheel cover is optimized to have a deeper cutting depth.



Large switch lever

with lock-off function (without lock-on function)

Lock-off function minimizes the switch lever from being accidentally pulled.

Anti-restart function


Even if battery is inserted, the motor does not start up when the switch is slide to "on".

Powered by 40Vmax XGT Li-ion battery



AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

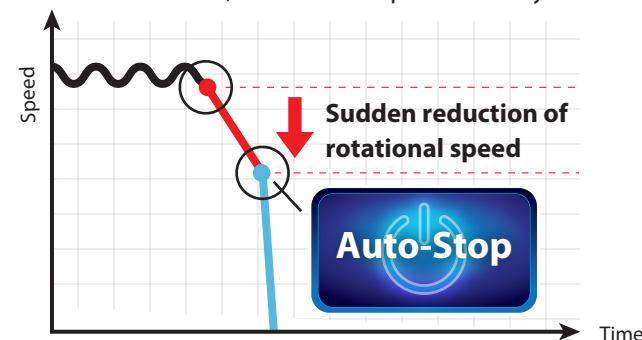

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



Electric brake

Electric brake is activated after the tool is switched off.