

Accessories
Dust collection wheel guard

A: for offset diamond wheel
B: for diamond wheel



Part No.	Size	Type
*191F81-2	125mm	A
*191G06-2	125mm	B

*Cannot be installed undetachable wheel cover models

Cutting wheel cover attachment for cutting work

Can be attached to the wheel cover for grinding with easy assembling.

Part No.	Size
199709-0	115mm
199710-5	125mm



Wheel cover

for cut-off wheel

Part No.	Size
*162555-4	100mm
*162556-2	115mm
*162557-0	125mm



Vibration proof grip set

Part No. 194514-0



Dust cover attachment set

Part No. 199514-5



Angle Grinder
Paddle Switch Trigger series



Photo: GA5050

Powerful 1,300 W Motor
with Paddle Switch Trigger



Photo: GA5052

Angle Grinder Paddle Switch Trigger series

	GA4050	GA5050/ GA5052
Double Insulation	GA4050	GA5050/ GA5052
Soft Start (GA4050R, GA5050R)	GA4050R	GA5050R/ GA5052R
Dust Collection (GA4050/R, GA5050/R)	GA4050R	GA5050R/ GA5052R
Continuous rating input	1,300W	1,300W
Wheel Diameter	100 mm (4")	125 mm (5")
No Load Speed (RPM)	11,000	11,000
Vibration Level (Normal side grip)	Surface Grinding: 6.5 m/s ² Disc Sanding: 2.5 m/s ² or less	Surface Grinding: 7.5 m/s ² Disc Sanding: 2.5 m/s ² or less
Sound Pressure Level	91 dB(A)	91 dB(A)
Sound Power Level	102 dB(A)	102 dB(A)
Dimensions (L x W x H)	325x117x110 mm (12-3/4"x4-5/8"x4-5/16")	325x140x117 mm (12-3/4"x5-1/2"x4-5/8")
Net weight	GA4050/R: 2.3-2.6 kg (5.1-5.7 lbs.) GA4051R: 2.3-2.5 kg (5.1-5.5 lbs.)	GA5050/R, GA5052/R: 2.5-2.8 kg (5.5-6.2 lbs.) GA5051R, GA5053R: 2.5-2.7 kg (5.5-6.0 lbs.)
Power supply cord	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)

Standard Equipment:
Grinding wheels are sold separately
Grip 36 (158237-4), lock nut wrench 20 (782420-7)(GA4050/GA4050R only), lock nut wrench 35 (782423-1)(GA5050/GA5050R only).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

M4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5/5, Số 1, Đường Số 6, KCN - DT - DV VSP Bắc Ninh, P. Phú Châu, TP. Bắc Ninh, TP. Bắc Ninh, T. Bắc Ninh, DT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội, DT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
102 Trưng Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng, DT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
366 Vũ Văn Kiệt, Khu Vực 5, P. An Thái, Q. Bình Thủy, TP. Cần Thơ, DT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 01 Lê Đức Thọ, Đường Hoàng Huy Riverside, P. Thảo Điền, Q. Thủ Đức, TP. Hồ Chí Minh, DT: 0283 821 5191




Angle of side grip to gear housing: 110°

	100mm	125mm
GA4050		GA5050
GA4050R		GA5050R Soft start/ Anti-restart function

Easy-to-operate large paddle switch trigger
works properly wherever the user holds the barrel grip.



High durability
cutting and grinding, due to longer service life of motor, carbon brushes, etc.



Enhanced shaft locking mechanism

- Gear housing is redesigned to prevent breakage of the shaft locking mechanism.
- Large size lock pin cap allows for normal shaft locking operation even with a thick-gloved finger.



Machined bevel gears

Toolless wheel cover (Slide lever style)
allows for fast and easy angle adjustment and installation/removal of wheel cover.



Anti-drop holders
allows to attach anti-drop strap, etc.



Easy-to-hold barrel grip
provides less hand fatigue and more control of the machine due to:

- Grip circumference smaller than 9564P series
- Ergonomic design




With soft start
GA4050R/ GA5050R
minimizes start-up shock and makes the tool start smoothly

With anti-restart function
GA4050R/ GA5050R/
Minimizes accidental start-up even if the tool is plugged to power source with the switch "ON".

Photo: GA5050

Angle of side grip to gear housing

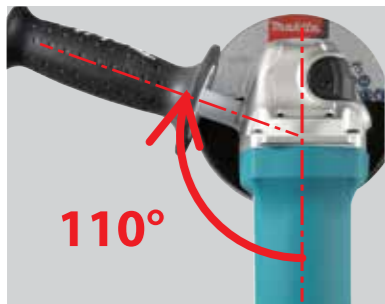

GA4050/ GA5050
GA4050R/ GA5050R



	Wheel size		Angle of side grip to gear housing	Soft start	Anti-restart function
	100mm	125mm			
Model	GA4050	GA5050	110°	-	-
	GA4050R	GA5050R		•	•