



Adapted for SDS-MAX bits

Easy-to-operate operation mode change lever

- The mode lock lever of the current HR5211C series is eliminated for easier mode change.
- Located on the top of the motor housing for reduced possibility of breakage even if the machine is carelessly laid.

Torque limiter

One touch sliding chuck
for easy bit changes

Soft grip

provides more comfort and control.

Electronic with:

- Constant speed control
- Soft start for reducing start-up torque

LED power light that indicates trouble with the electric circuit

LED service light that indicates when to replace carbon brush

Variable speed control by dial

Photo : HR52120C (Tool does not come with bit.)


Accessories

Dust Extractor Attachment Set

The dust extractor attachment can be attached without replacing the side handle.

Part No. 196858-4

Drilling mode

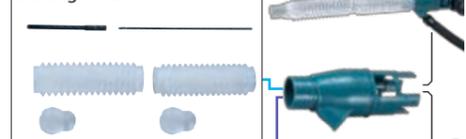

Hammering mode



Dust Extractor Attachment Set

Hammering only

Part No. 196571-4

Connected with vacuum cleaner, this attachment is able to extract fine dust particles at very high dust extraction rate to provide cleaner work environment.




Rotary Hammer

HR5212C / HR5202C

52mm (2-1/16") Adapted for SDS-MAX bits

175 mm



Double Insulation



Variable Speed



SDS-MAX Shank



Torque Limiter



Constant Speed



Soft Start



Carrying Case

Continuous rating Input Capacity	1,510W Concrete (with T.C.T. bit) : 52mm (2-1/16") Concrete (with Core bit) : 160mm (6-5/16")
Impacts per minute (ipm)	1,100 - 2,250
No load speed (rpm)	150 - 310
Dimensions (L x W x H)	HR5212C: 599x140x287mm (23-1/2"x5-1/2"x11-1/4") HR5202C: 599x134x287mm (23-1/2"x5-1/4"x11-1/4")
Net weight*	HR5212C: 11.9kg (26.2lbs) HR5202C: 10.9kg (24.1lbs)
Power supply cord	5.0m (16.4ft)

Standard Equipment:

Depth gauge, Side handle (D-shaped), Side grip (Bar style), Bit grease (Tool does not come with bit.)

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-AG

Rotary Hammer 52mm (2-1/16")
HR5212C / HR5202C

Satisfy Professional's Needs



Adapted for SDS-MAX bits



AVT & SOFT
ANTI VIBRATION TECHNOLOGY **NO LOAD**

ADVANCED
Vibration Control

Extra Comfort with unrivalled low level of vibration

Photo : HR5212C (Tool does not come with bit.)

AVT

ANTI VIBRATION TECHNOLOGY

HR5212C only

High performance

Drilling efficiency

15% higher

with 32mm diameter bit

Compared with our predecessor model

Chipping efficiency

10% higher

with bull point

Comparison of Vibration level* and Time to reach ELV (Exposure Limit of Vibration)**

HR5212C	9.0m/s²	148min.
Predecessor Model	12.5m/s ²	77min.
Competitor "B"	20.5m/s ²	29min.

*It is known as the tri-axial value and value at Directive of A(8).

**It means the maximum amount of vibration that an operator may be exposed to on any single day.



Adapted for SDS-MAX bits

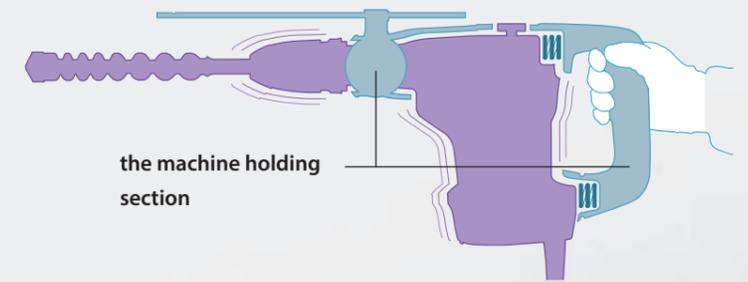


Photo : HR5212C (Tool does not come with bit.)

Unrivalled low level of vibration


Vibration absorbing housing

This is the new AVT mechanism advanced from the current "Vibration absorbing handle". The level of vibration is further reduced by completely separating the machine holding section from the motor/transmission section




Active dynamic vibration absorber

ensures operation with extremely low vibration. allows tool design with flat body sides for better handling.

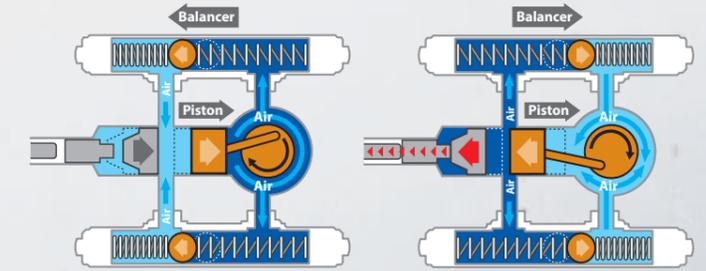

Damper spring

absorbs reaction force caused by drill bit at the moment of impact.

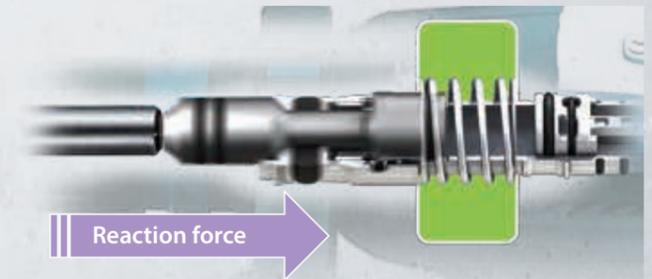


During no-load

SOFT NO LOAD HR5212C only

Suppression of motor speed

- reduces vibration of tool body when idling, accordingly decreases the amount of vibration to operator's hands during a day's operation.
- minimizes deflection of bit tip from aiming point when starting chipping.

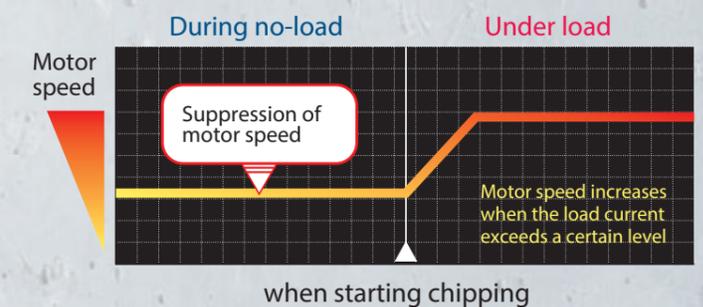

lock-on in hammering mode



Lock-on switch for continuous chiseling applications

Trigger switch for intermittent chiseling applications

Rotation with hammering

Bit angle settings

