

Makita Laser Series

Line-Point Laser
SK103PZ



Cross Line Laser
SK104Z



Laser Level
SKR200Z



Cross Line Laser
SK106D / SK105D



Green Laser Series

SK312GD / SK209GD
SK106GD / SK105GD

High brightness green
laser for increased
visibility at bright site



Accessories

Laser Receiver LDG-3
TK0LDG301F
SK312GD / SK209GD



Laser Receiver LDX1
LE0085702
SK106GD / SK105GD
SK106D / SK105D



Large soft bag
832173-9
SK106GD / SK105GD
SK106D / SK105D



SK106GD
BL1021B x2
DC105B
Wall Mount
Adapter

Adapter for USB
ADP05



Power supply cable
199006-4
SK312GD / SK209GD
199178-5
SK106GD / SK105GD



Hand strap set
199007-2



Min tripod
TK0LM1001F



Tripod 1800
TK0LM4001F



Tripod 2900
TK0LM5030F



Wall mount
TK000ET03F
SK312GD / SK209GD



Wall mount
Wall and ceiling adapter for universal
applications with height adjustment
function

LE00855706
SK106GD / SK105GD
SK106D / SK105D



Rechargeable Green Multi Line Laser SK312GD / SK209GD

	SK312GD	SK209GD
Measuring range	-	-
Measuring range w/ detector	-	-
Leveling accuracy	±1 mm / 10 m	±1 mm / 10 m
Self-leveling range	±2°	±2°
Laser fan angle	Horizontal : 110° Vertical : 130°	Horizontal : 110° Vertical : 130°
Number of laser lines	3	3
Laser type	Laser class 2 : 515 nm	Laser class 2 : 515 nm
Operating temperature	-10 - 40 °C	-10 - 40 °C
Tripod thread	5/8"	5/8"
Operating Time (Approx. Hours)	10-28	15-40
Dimensions (L x W x H)	w/ BL1016/BL1021B : 122x110x225 mm	w/ BL1016/BL1021B : 122x110x225 mm
	w/ BL1041B : 122x130x225 mm	w/ BL1041B : 122x130x225 mm
Net weight	1.5 - 1.6 kg (3.3 - 3.5 lbs)	1.5 - 1.6 kg (3.3 - 3.5 lbs)

Standard Equipment : Laser Viewing Glass, Shoulder Strap, Storage Case
Dimensions (with carry handle in retracted position)

Rechargeable Green Cross Line Laser SK106GD / SK105GD

	SK106GD	SK105GD
Up to: 35 m	Up to: 35 m	Up to: 35 m
Up to: 80 m	Up to: 80 m	Up to: 80 m
±3 mm / 10 m	±3 mm / 10 m	±3 mm / 10 m
±4°	±4°	±4°
Horizontal: 180°	Horizontal: 180°	Horizontal: 180°
Vertical: 170°	Vertical: 160°	Vertical: 160°
2	2	2
Laser class 2: 525 nm	Laser class 2: 525 nm	Laser class 2: 525 nm
-10 - 50 °C	-10 - 50 °C	-10 - 50 °C
1/4" / 5/8"	1/4" / 5/8"	1/4" / 5/8"
7 - 20	7 - 20	7 - 20
w/ BL1016/BL1021B : 138x64x102 mm (5-7/16"x2-1/2"x4")	w/ BL1016/BL1021B : 1138x64x102 mm (5-7/16"x2-1/2"x4")	w/ BL1016/BL1021B : 1138x64x102 mm (5-7/16"x2-1/2"x4")
w/ BL1041B : 157x64x102 mm (6-3/16"x2-1/2"x4")	w/ BL1041B : 157x64x102 mm (6-3/16"x2-1/2"x4")	w/ BL1041B : 157x64x102 mm (6-3/16"x2-1/2"x4")
0.69 - 0.85 kg (1.5 - 1.9 lbs.)	0.67 - 0.84 kg (1.5 - 1.9 lbs.)	0.67 - 0.84 kg (1.5 - 1.9 lbs.)

Standard Equipment : Soft bag, Adapter, Target Plate

The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation


3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201806

Rechargeable Green Multi Line Laser


Horizontal / 3-Vertical lines

SK312GD



Horizontal / 2-Vertical lines


SK209GD



Rechargeable Green Cross Line Laser


Cross line + Point

SK106GD



Cross line

SK105GD



12V max Lithium-ion Battery




Green Laser Series

Powered by the following 12V max slide CXT Li-ion batteries

1.5Ah : BL1016, 2.0Ah : BL1021B, 4.0Ah : BL1041B



SK312GD / SK209GD

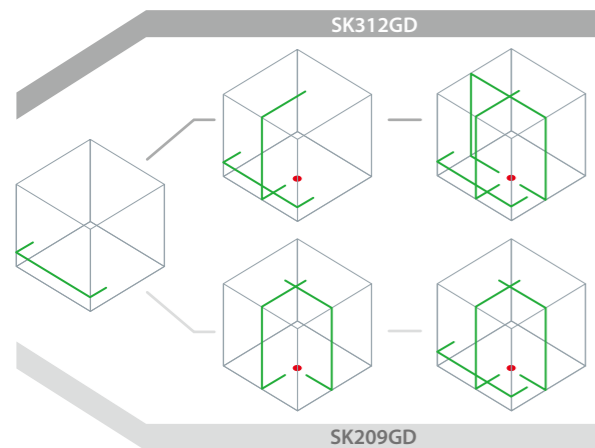

Thời gian hoạt động lâu dài

*at max output

SK312GD / SK209GD

10 / 15h

BL1016
1.5Ah

14 / 20h

BL1021B
2.0Ah


28 / 40h

BL1041B
4.0Ah

Tay cầm lớn
Tránh tình trạng máy bị rớt.

Điều chỉnh chân vít
Có thể điều chỉnh phương ngang ở bất cứ vị trí nào mong muốn.

Leveling accuracy
±1mm / 10m

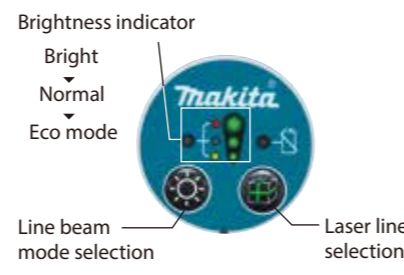

Line beam mode memory

When the power is turned ON, the laser beam mode will be the same mode as the last time turned OFF.


Nút tinh chỉnh
Tùy chỉnh từ 2 bên bằng nút xoay.

XPT

Extreme Protection Technology

Khả năng chống thấm bụi và độ ẩm cao trong môi trường làm việc khắc nghiệt

SK106GD / SK105GD

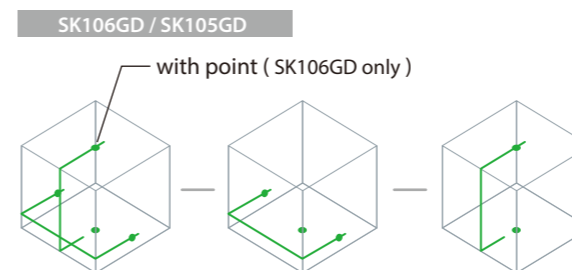

Thời gian hoạt động lâu dài

*at max output

SK106GD / SK105GD

7 / 7h


BL1016
1.5Ah

10 / 10h

BL1021B
2.0Ah

20 / 20h

BL1041B
4.0Ah

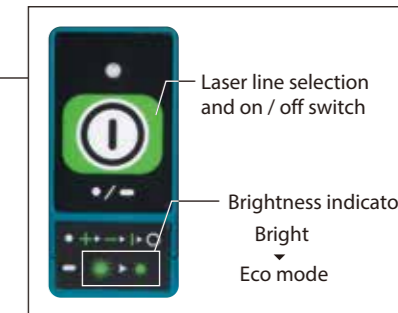

Adapter with magnet

for SK105GD / SK105D




for SK106GD / SK106D



Leveling accuracy
±3mm / 10m

SK312GD / SK209GD

Shock absorbing construction
prevents the tool from vibration during transport

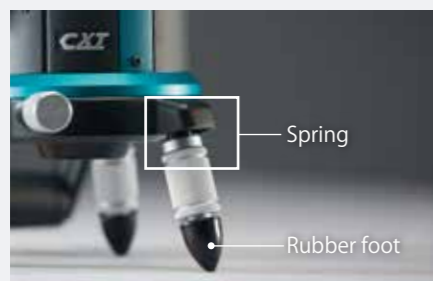


Aluminum carrying case



ALL PRODUCTS

High brightness green laser

for increased visibility at bright site

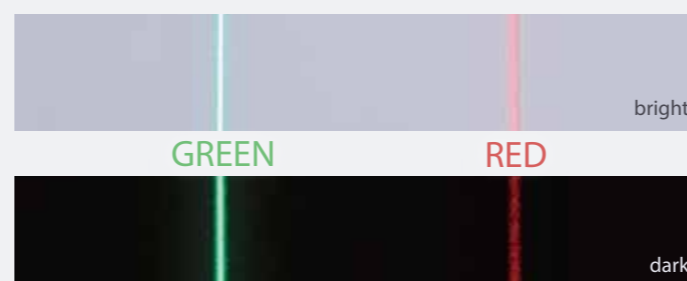

SK106GD / SK105GD

Pendulum lock

Pendulum lock enables slope incline applications for increased versatility



Công tắc khóa

Soft bag

