




Cordless Angle Drill
DA001G 13 mm (1/2")

High Power
Durability
Digital Communication

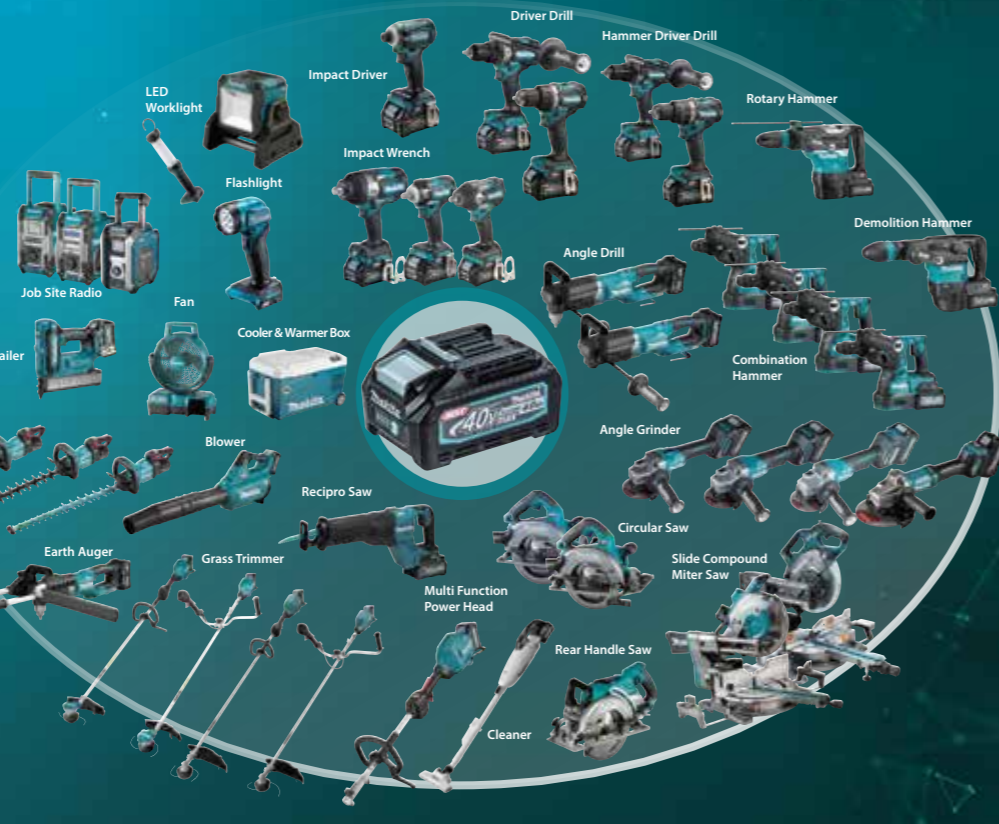

High speed drilling with light weight body



photo: DA001G

Net weight
5.9 kg
model: DA001G
battery: BL4040

Accessories

Grip set

Mã số: 191P11-3

A side grip designed to help the user control and stabilize the drill body easily in the case of recoil or reaction forces.



Handle set

Mã số: 191R81-4

Includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier.



Cordless Angle Drill Line-up



DDA460



DDA450

Keyed Drill Chuck



Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Angle Drill		DA001GZ 13 mm (1/2")
Variable Speed	Capacity	Steel: 13 mm Wood (Self-Feed Bit) Hi: 65 mm/ Lo: 118 mm Wood (Hole Saw) Hi: 105 mm/ Lo: 159 mm Wood (Auger-Bit): 50 mm
Brake	Hex Shank	DA002G: 11 mm
Reversing	No Load Speed (RPM)	High / Low: 0 - 1,500 / 0 - 400
Mechanical 2-Speed	Max Fastening Torque	High: 55 N·m / Low: 136 N·m
Torque Limiter	Vibration Level	Drilling into Metal: 2.5 m/s ² or less
Soft Start	Sound Pressure Level	84 dB(A)
Built-in Job Light	Sound Power Level	95 dB(A)
Carrying Case (DA001G)	Dimensions (L x W x H)	DA001G: w/ BL4040: 545 x 128 x 199 mm w/ BL4020 / BL4025: 539 x 128 x 199 mm DA002G: w/ BL4040: 545 x 128 x 193 mm w/ BL4020 / BL4025: 539 x 128 x 193 mm
	Net weight	DA001G: 5.3 - 6.2 kg
	Standard Equipment:	DA001GZ: No battery, charger Grip assembly (122A18-8), hex. wrench 6 (783204-6), chuck key S-13 (763251-3), key holder complete (141C01-8), + screw M4X12 (251314-2), hook assembly (127811-9), pan head screw MSX12 (911211-1).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

DA001G
Keyed Drill Chuck



Capacity of drill chuck:
2-13mm (1/16" - 1/2")



CÔNG TY TNHH MAKITA VIỆT NAM

Kho 456, Block 16, 19L1-2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, X. Phú Châu, TX. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
1102 Triệu Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUƠN MA THUỘT
88 Lê Đức Thọ, P. Thắng Mỹ, TP. Buôn Ma Thuột, T. Đắk Lắk.
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Di An Hoàng Hai Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHA TRANG
Lô 56-58 Đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc, TP. Nha Trang, T. Khánh Hòa.
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5181



High drilling performance

Drilling work amount BL4040 / on full battery charge		
two layers of SPF2x4 plate / ø2-9/16" Self-feed bit / high speed mode	four layers of SPF2x10 plate / ø7/8" Auger bit / high speed mode	SPF2x10 plate / 4-1/8" TCT hole saw / high speed mode
60 pcs	100 pcs	80 pcs




Capacity
Steel
13 mm
Self-feed bit (for wood) High speed
65 mm
Hole saw (for wood) High speed
105 mm
Auger bit (for wood)
50 mm



Side handle

Pressing Side handle against pillar provides stable work




XPT
eXtreme Protection Technology



ADT

Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation

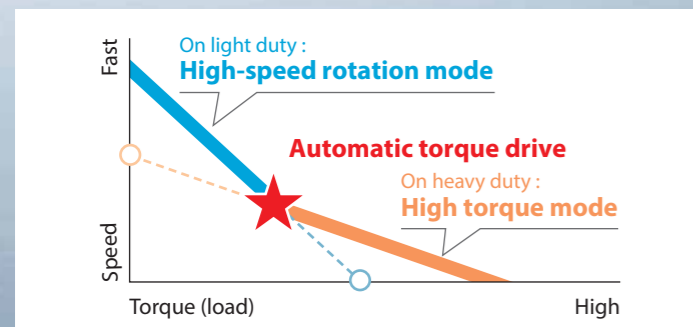

Well-balanced



Vertically long body and handle are easy to hold and easy to work stably.

Rotation handle



Angle of Front handle can be adjustable according to working posture.

Torque limiter

When the drill bit is locked, the bit rotation will stop

Hook assembly (anti-drop attachment)

- Anti-drop strap can be attached.
- Also can be used as a skyhook.

