

Work amount	
depth 600mm / BL4040 / on full battery charge / low speed mode	
ø150mm about 100 holes	ø200mm about 65 holes



Reversing switch



enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



Torque limiter


The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.



ADT

Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation

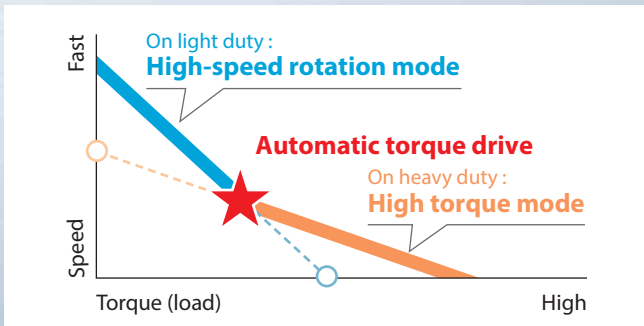

For larger holes



Power similar to 36cc engine product



Auxiliary handle

Reversing switch

Makita

Reaction receiver

Mechanical 2-speed

Twin LED job light

Adapter

Earth auger drill bit
Length: 800mm

1 Low speed
2 High speed

Ø100 mm

Ø150 mm

Ø200 mm

BL MOTOR
High power
Brushless motor

XPT
eXtreme Protection
Technology

Work amount	
depth 600mm / BL4040 / on full battery charge / low speed mode	
ø150mm about 100 holes	ø200mm about 65 holes





Reversing switch
enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.

+

Torque limiter
The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.



ADT
Automatic torque Drive Technology
automatically changes the drilling speed according to load conditions for an optimum operation

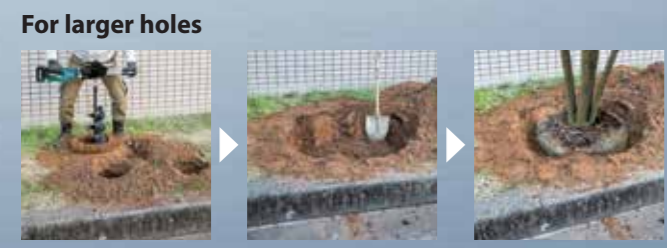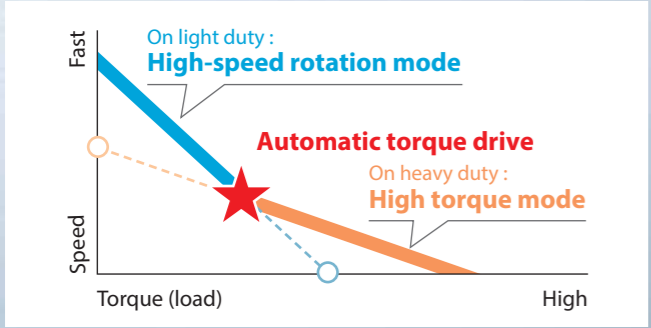

Auxiliary handle
Reversing switch
Reaction receiver
Mechanical 2-speed
1 Low speed
2 High speed
Twin LED job light
Adapter
Earth auger drill bit
Length: 800mm
ø100 mm
ø150 mm
ø200 mm


BL MOTOR
High power Brushless motor

XPT
eXtreme Protection Technology



**Cordless Earth Auger
DG001G**


**High Power
Durability
Digital Communication**

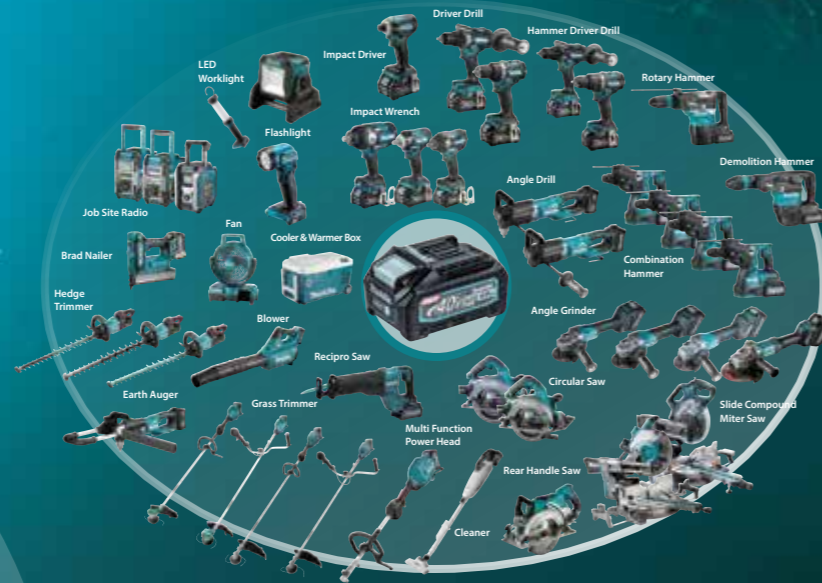

High performance drilling with light weight body


Portable Power Pack

PDC01
*(191M44-0) *Not include adapter
(191A67-6)
+ 18V x 2



Powered by up to four 18V LXT batteries

PDC02
(191A62-6)
18V x 2 + 18V



Powered by up to four 18V LXT batteries

PDC1200A02

Powered by 36V-40Vmax built-in battery



Charger: DC4001 (191L00-4)

Adapter set (40Vmax)

Part No. 191N62-4




Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

Accessories

Standard Equipment

Earth auger drill bit
Length: 800mm



Blade for earth auger bit

Changing blade for Earth auger drill bit



Extension bar

Part No. E-07325



Pin for earth auger drill

Part No. E-07331



Handle set

Part No. 191P11-3

includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier.



Charging Time

Battery Model	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Earth Auger DG001GZ02

Variable Speed	Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
Brake	No Load Speed (RPM)	High / Low: 0 - 1,500 / 0 - 400
Reversing	Max Fastening Torque	High: 55 N·m (487 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
Mechanical 2-Speed	Vibration Level	2.5 m/s ² or less
Torque Limiter	Sound Pressure Level	84 dB(A)
Soft Start	Sound Power Level	95 dB(A)
Built-in Job Light	Dimensions (L x W x H)	w/ BL4050F: 863 x 605 x 199 mm w/ BL4040: 842 x 605 x 199 mm w/ BL4020 / BL4025: 836 x 605 x 199 mm
Carrying Case	Net weight	7.2 - 8.1 kg
	Standard Equipment	Handle set (191P11-3), + screw M4x12 (251314-2), hex socket head bolt M8x30 (922453-2), hex Wrench 5 (783232-1), hex Wrench 6 (783204-6), hex Wrench 10 (783207-0), chuck key s-13 (763251-3), key holder complete (141C01-8), adapter D (327687-6).

Max Drilling Capacity

ø200 mm

Net weight

7.8 kg

with BL4040

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 456, Block 16, 18L1-2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, X. Phú Châu, TP. Từ Sơn, T. Bắc Ninh
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH ĐÀ NẴNG
1102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH BUƠN MA THUỘT
88 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đình, Di An Hoàng Hai Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH NHA TRANG
Lô 56 - 38 đường B6, Khu di tích Vĩnh Điện Trưng, Xã Vĩnh Ngọc, TP. Nha Trang, T. Khánh Hòa
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh
ĐT: 0283 821 5191