



Accessories

Dust extraction system

DX15 Maximum bit size attachable: $\varnothing 28\text{mm} \times 260\text{mm}$



Drilling depth can be adjusted



Position adjustable Dust collection inlet



Equipped with Filter cleaning mechanism



HEPA filter



Dust case set
Part No. 199586-0



Filter set
Part No. 199557-7



Filter set
Part No. 195173-3



Hook set
Part No. 191W90-3



Portable Power Pack

PDC01 Powered by up to four 18V LXT batteries

*(191M44-0) *Adapter not include (191A67-6)



PDC1200A02

Equipped with built-in battery cells



Adapter set (40Vmax)

Part No. 191N62-4 (191N62-4)



Charger: DC4001 (191L00-4)
Charging time: 6 hours

Charging Time

	DC40RA	DC40RC
*1BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Cordless Combination Hammer

HR007G 28 mm (1-1/8") Adapted for SDS-PLUS bits

Variable Speed	Dust Collection	Impact Energy	EPTA-Procedure 05/2009: 3.0 J
Brake	Built-in Job Light	Capacity	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 28 / 13 / 32 / 54 / 65 mm (1-1/8" / 1/2" / 1-1/4" / 2-1/8" / 2-9/16")
Reversing	Carrying Case	Blows Per Minute (BPM)	0 - 5,000
SDS-PLUS Shank		No Load Speed (RPM)	0 - 980
Torque Limiter		Vibration Level	Hammer Drilling into Concrete: 7.5 m/s ² Chiselling Function w/ Side Grip: 8.6 m/s ² Drilling into Metal: 2.8 m/s ²
Constant Speed		Sound Pressure Level	94 dB(A)
		Sound Power Level	105 dB(A)
		Dimensions (L x W x H)	w/ BL4020 / BL4025: 458 x 101 x 234 mm (18 x 4 x 9-1/4") w/ BL4040: 473 x 101 x 240 mm (18-5/8 x 4 x 9-1/2")
		Net weight	3.8 - 4.8 kg (8.4 - 10.6 lbs.)

Standard Equipment: Grease vessel (194683-7), depth gauge (331886-4), cloth (443122-7), air duct cap (413A50-6), hammer service kit (199233-3)

Impact energy

[EPTA-Procedure 05/2009]

3.0
Joule

Cordless 28mm D-handle combination hammer

Work speed
 $\varnothing 10.5\text{mm}$ (3/8")

6.1 sec

Battery: BL4040

3 mode

- Rotation
- Rotation + Hammering
- Hammering



**BL
MOTOR**

Anti-Vibration Technology

Equipped with anti-vibration main handle and side handle to reduce vibration to operator's hands for less hand and arm fatigue from long continuous operation.

AVT Vibration level at main handle
8.6 m/s²



Anti-vibration grip

Vibration absorbing handle




with Dust extraction system DX15

Work speed		
Drilled holes to a depth of 60mm (2-3/8") at 8kg pressing load Concrete with compressive strength of 40N/mm ² BL4040 / on full battery charge		
ø10.5mm (3/8")	ø12.5mm (1/2")	ø16.0mm (5/8")
6.1 sec	8.6 sec	12 sec


AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

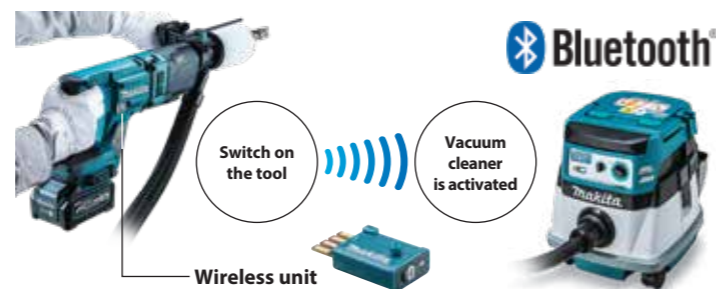

Bluetooth

Switch on the tool

Vacuum cleaner is activated

Wireless unit

XPT eXtreme Protection Technology

Adapted for SDS-PLUS bits



Adapted for SDS-PLUS bits

3-mode operation
• Rotation
• Rotation + Hammering
• Hammering

Single LED job light



Reversing switch

