



photo: UA004G



photo: UA003G

Accessories ● Standard equipment

Guide bar / Saw chain / Guide bar cover



Cutter type: CC: Chamfer chisel

Guide Bar				Saw Chain				Bar Cover		Drive sprocket		
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No.	Part No.	Type	Part No.
25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/ .043"	3/8"LP	90PX	CC	191H00-0	458501-6	Sprocket 3/8"LP	226992-7
30cm/12"			191G15-1	46					191H01-8	419288-5		
25cm/10"			191G22-4	40	1.3mm/ .050"				191H08-4	458501-6		
30cm/12"			191G23-2 ●	46	1.3mm/ .050"				191H10-7	419288-5 ●		

Band assembly set Part No. 191K37-5 ●

The weight of the tool can be distributed on shoulders for reduced operator fatigue.



Portable Power Pack



Charging Time

	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
*BL4040 4.0Ah	45 min	67 min
*BL4050F 5.0Ah	50 min	85 min


*1 Recommended battery

Cordless Pole Saw	UA003GZ01	300 mm (12")
Cordless Telescopic Pole Saw	UA004GZ01	300 mm (12")
Variable Speed	Variable Speed	Variable Speed
Brake	Brake	Brake
Soft Start	Soft Start	Soft Start
Standard Equipment: Guide bar 300mm(191G23-2), chain cover (419288-5), saw chain 91PX (196206-7), wrench 13-16 (782023-7), band assembly(191K37-5), safety goggles (195246-2), chain edger.	Standard Equipment: Guide bar 300mm(191G23-2), chain cover (419288-5), saw chain 91PX (196206-7), wrench 13-16 (782023-7), band assembly(191K37-5), safety goggles (195246-2), chain edger.	Standard Equipment: Guide bar 300mm(191G23-2), chain cover (419288-5), saw chain 91PX (196206-7), wrench 13-16 (782023-7), band assembly(191K37-5), safety goggles (195246-2), chain edger.
Guide Bar Length	300 mm (12")	300 mm (12")
Saw chain	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"	Gauge: 1.1 / 1.3 mm (0.043 / 0.050") Pitch: 3/8"
Chain Speed	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)	0 - 20.0 m/s (0 - 1,200 m/min) (0 - 3,940 FPM)
Oil Tank Capacity	160 mL	160 mL
Dimensions (L x W x H)	2,230 x 156 x 187 mm without guide bar and Battery 2,526 x 156 x 192 mm with guide bar, Saw chain and Battery BL40450F	2,516 - 3,748 x 156 x 187 mm 2,812 - 4,044 x 156 x 192 mm
Net weight	6.1 - 7.4 kg (13.4 - 16.3 lbs.)	7.8 - 9.1 kg (17.2 - 20.1 lbs.)
UA003GZ01, UA004GZ01: Battery & charger are sold separately		



High power
X
Long reach
||
High efficiency

300mm (12")
UA003G Fixed length
UA004G Telescopic

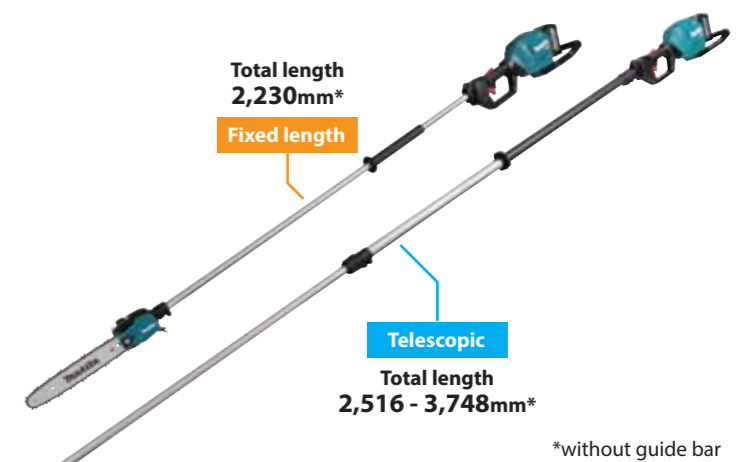

*without guide bar

No load chain speed
20.0 m/s



CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

Kho 456, Block 16, 18L1-2 Đường số 3, KCN VSP N. P. Hòa Phú, TP. Thủ Dầu Một, Bình Dương.
ĐT: 0274 362 8338 Fax: 0274 362 8339 Website: www.makita.com.vn

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đình, Di An Hoàng Hai Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHÀ TRANG
88 Lê Đức Thọ, P. Thống Nhất, Quận Thủ Đức, TP. Thủ Đức, T. Bình Dương.
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BƯỚC LÁ
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191



***Saw head weight**
0.7 kg

Excellent tool balance
The motor is located in the battery housing at the bottom of the tool. This bottom-mounted motor reduces the saw head weight, allowing for:

- Ease to control the saw head for easy access to a desired cutting position
- Reduced user fatigue and stress

*without guide bar, saw chain and oil

Telescopic pole
(UA002G / UA004G only)
Tool-less pole extension and fixing for easy adjustment of pole length

BL MOTOR **High operating efficiency**
High power BL motor delivers the same or higher operation efficiency than 35mL class engine models.

AFT Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

Speed
Time

Sudden reduction of rotational speed

Auto-Stop

Retractable oil tank cap knob decreases the chance that the saw head will be snagged in branches.

Slim saw head
The same slim design as engine pole saws provides easy maneuverability into branches.

Saw head width
87 mm

Chain oil tank with high transparency allows to easily check the amount of remaining oil.

Integrated branch hook convenient for removing cut branches from trees

Anti-fall captive nut

Maximum total length
3,748 mm
Shortest total length
2,516 mm

Total length
2,230 mm

Fixed length

300mm (12")
UA003G Fixed length
UA004G Telescopic

300mm (12")

XPT / WG / IPX4
WET GUARD

High water-resistance
allows to operate the machine even if it is wet with water.

Battery guard
also can be used as an auxiliary grip.

photo: UA002G