



Cordless Grass Trimmer UR006G / UR007G



As powerful as 30cc petrol grass trimmer

Wet Guard



photo: UR006G

Net weight
6.2 kg
model: UR006G
battery: BL4050F

Portable Power Pack

PDC01
Powered by up to four 18V LXT batteries



PDC1200
Powered by 36V-40Vmax built-in battery



Charger: DC4001

Adapter set (40Vmax)
Part No. 191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

Accessories Phụ kiện kèm theo

Trimmer head

Part No. 196324-1
Cord/Line : 2.4mm x3.6m
Ref. : UN-74L



Part No. 197296-3
Cord/Line : 2.0mm x3m
Ref. : ECO 4L



Part No. 191D89-4
Cord/Line : 2.0mm x4m
Ref. : 96-M10L



Part No. 198893-8 (EU)
Cord/Line : 2.0mm x3m
Ref. : 95-M10L



Part No. 198266-5
Cord/Line : 2.4mm x3m
Ref. : UN-72L



Part No. 191D91-9
Cord/Line : 2.4mm x3m
Ref. : 96-M10L



Brushcutter blade

For UR006G / UR007G

	2-tooth blade	3-tooth blade	4-tooth blade
Blade dia			
230mm	197997-3 <i>Limited quantity</i> D-66058	D-66020	195150-5 <i>Limited quantity</i> D-66008
255mm	D-66064	D-66036	D-66014

Four-leaf Spiral Nylon cord

	Green	Orange
Size	Part No.	Part No.
2.0mmx15m	197472-9	2.4mmx15m 198501-1
2.0mmx30m	197473-7	2.4mmx30m 198502-9
2.0mmx160m	197474-5	2.4mmx120m 198503-7
2.0mmx280m	197475-3	2.4mmx180m 198504-5

Protection guard for brush cutting blades

Part No. 191B54-1 UR006G / UR007G
Part No. 191B55-9 UR008G



Shoulder strap assembly

Comfort Part No.122906-3
Single Part No.127759-5

Plastic blade

	Plastic blade Set	Replacement plastic blade
Cutting width		
255mm	126642-3 (no packaging) <i>Limited quantity</i> 198383-1 (packaging)	198426-9
305mm	199868-0	199870-3

Charging Time Reference

	DC40RA Fast Charging	DC40RC
BL4020 2.0Ah	22min	30min
BL4025 2.5Ah	28min	38min
BL4040 4.0Ah	45min	67min
BL4050F 5.0Ah	50min	85min

*1 Recommended battery

Cordless Grass Trimmer

UR006G / UR007G

Variable Speed	Cutting Width	Metal Blade: 255 mm (10") (UR006G / UR007G only) Nylon Cutting Head: 430 mm (17") Plastic Blade: 305 mm (12")
Brake	No Load Speed (RPM)	Metal Blade (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600 Nylon Cutting Head (3 / 2 / 1): 0 - 5,500 / 0 - 5,000 / 0 - 4,600 Plastic Blade (305 mm) (3 / 2 / 1): 0 - 7,000 / 0 - 5,500 / 0 - 4,600
Reversing	Spindle Size	M10 x 1.25 LH
Electronic 3-Speed	Dimensions (L x W x H)	w/o Cutting Tool, w/ BL4050F: UR006G: 1,840 x 681 x 563 mm (72-1/2 x 26-3/4 x 22-1/4") UR007G: 1,840 x 400 x 269 mm (72-1/2 x 15-3/4 x 10-5/8")
Constant Speed	Net Weight	UR006G: 5.6 - 6.2 kg (12.3 - 13.7 lbs.) UR007G: 5.2 - 5.8 kg (11.5 - 12.9 lbs.)
Soft Start		

Standard Equipment: Trimmer head 95 (197993-1), plastic blade 255 (126642-3), box wrench 17 (782238-6), hex wrench 4 (783202-0), accessory bag (831304-7), safety goggle (195246-2), band assembly L(122A37-4)(UR006G)/(127759-5)(UR007G), tool cover 2T (144392-8).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

M4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5/5, Block 16, 19L1-2 Đường số 3, KCN VSIP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
102 Triệu Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 9478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUƠN MA THUỘT
88 Lê Đức Thọ, P. Thắng Mỹ, TP. Buôn Ma Thuột, T. Đắk Lắk.
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đình, Di An Hoàng Hai Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHA TRANG
Lô 56-38 đường B6, Khu đô thị Vinh Diễm Trưng, Xã Vinh Ngọc, TP. Nha Trang, T. Khánh Hòa
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191

Max Output
1.0 kw





WG
WET GUARD

High water-resistance allows to operate the machine even if it is wet with water.

XPT

eXtreme Protection Technology
Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

photo: UR007G

BL
MOTOR


Rear end mounted motor
Makes the tool weight balance similar to engine grass trimmers, enabling user to easily lift up the saw head for ridge weed removal, etc.



ADT

Automatic torque Drive Technology


Automatically changes the cutting speed according to grass density.

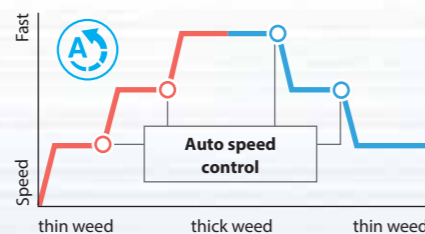

AFT


Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

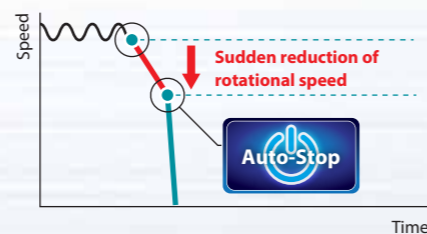

Multi functional control panel: near right hand position for easy access and operation

Reverse button

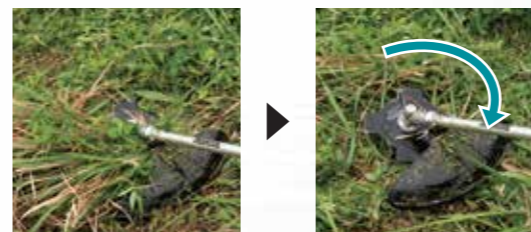

Reverse switch for clearing entangled weeds and grass from cutting head

Large push button main power switch
allows for easy on/off even with gloved hand.

UR006G
Offset bike Handle




Cutting width: 430mm (17")
similar to 30mL class engine grass trimmers.

Protector (UR006G / UR007G)
• Dual-purpose protector, Nylon cutting head can be used by attaching Extension.
• Cutting width: 255mm with Metal blade 430mm with Nylon cutting head

Max Output
1.0 kW

Toolless handle lock mechanism for good portability (UR006G only)

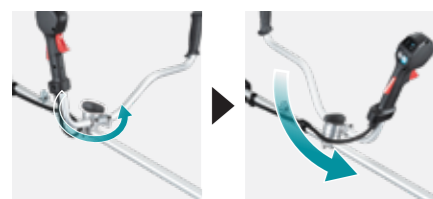

The vertical center line of the handle bar always stays aligned with that of user (UR006G only)



• Enabling user to work with less fatigue even in long continuous operation.
• Allowing for a wider swing.

New tool-less quick fastening handle holder (UR006G only)



• Compatible with two-piece handle bar
• Each handle-to-shaft angle is independently adjustable without tool.

UR007G
Loop-Handle



Run Time*		
Nylon cutting head		
High	Med	Low
12	24	38
min with BL4050F		

*on a single full battery charge / No load