


High Power
Durability
Digital
Communication



High cutting
efficiency

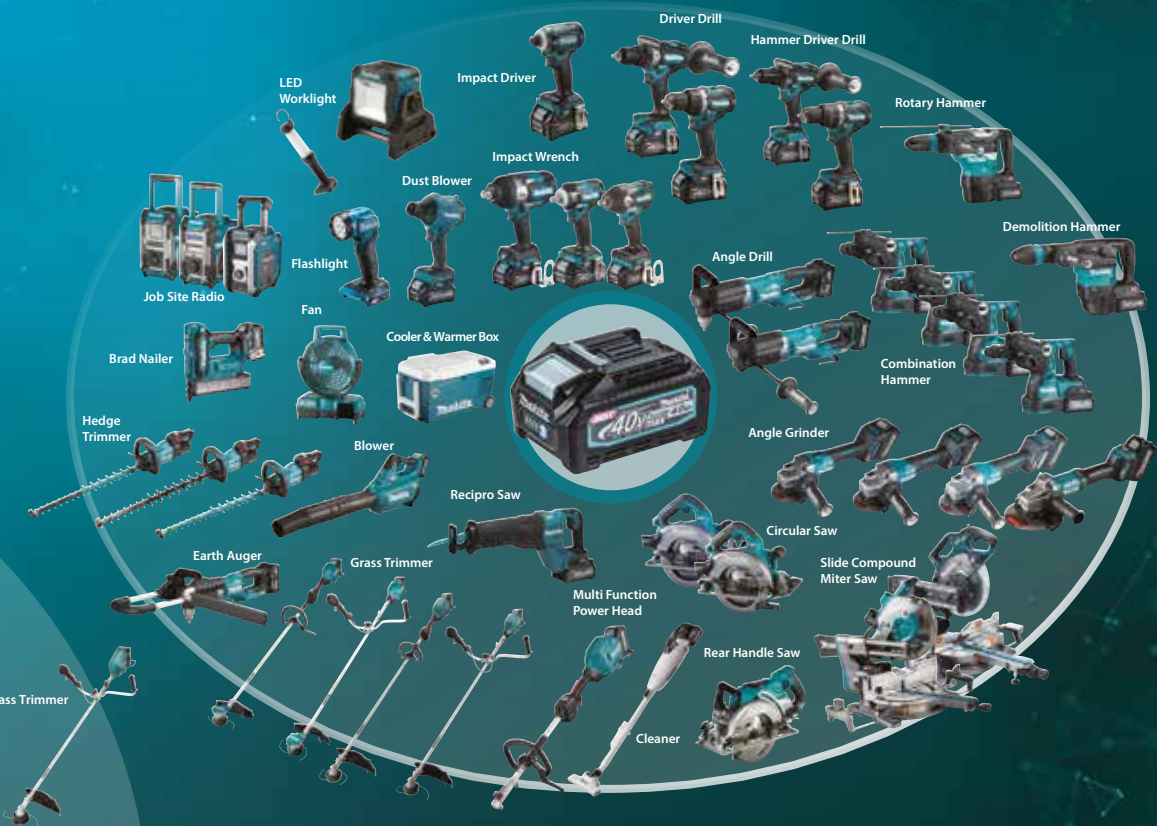

Cordless Recipro Saw Series

XGT 40V Li-ion max
JR001G

Toolless blade change



18V LITHIUM-ION
DJR188

Toolless blade change



DJR187

Toolless blade change



DJR185

Toolless blade change



DJR183

Toolless blade change



	JR001G	DJR188	DJR187	DJR185	DJR183
Length of Stroke	32 mm (1-1/4")	20 mm (13/16")	32 mm (1-1/4")	13 mm (1/2")	13 mm (1/2")
Strokes Per Minute (SPM)	0 - 3,000	0 - 3,000	High / Low: 0 - 3,000 / 0 - 2,300	0 - 3,000	0 - 3,000
Capacity	Pipe / Wood: 130 / 255 mm (5-1/8" / 10")	Pipe / Wood: 130 / 255 mm (5-1/8" / 10")	Pipe / Wood: 130 / 255 mm (5-1/8" / 10")	Pipe / Wood: 50 / 50 mm (2" / 2")	Pipe / Wood: 50 / 50 mm (2" / 2")

Charging Time

	Fast Charging DC40RA	DC40RC
*1BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Cordless Recipro Saw

JR002G

Variable Speed	
Brake	
Torque Limiter	
Orbital Cutting	
Built-in Job Light	
Carrying Case	
Standard Equipment:	
Recipro Saw Blades, Charger, Battery	
Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	0 - 3,000
Capacity	Pipe / Wood: 130 / 255 mm (5-1/8" / 10")
Vibration Level	Cutting Boards: 8.5 m/s ² Cutting Wooden Beams: 7.9 m/s ²
Sound Pressure Level	87 dB(A)
Sound Power Level	98 dB(A)
Dimensions (L x W x H)	w/ BL4020 / BL4025: 436 x 97 x 250 mm (17-1/8 x 3-13/16 x 9-7/8") w/ BL4040: 451 x 97 x 256 mm (17-3/4 x 3-13/16 x 10-1/8") w/ BL4050F: 470 x 97 x 277 mm (18-1/2 x 3-13/16 x 10-7/8") w/ BL4080F: 471 x 97 x 296 mm (18-1/2 x 3-13/16 x 11-5/8")
Net weight	4.6 - 5.8 kg (10.1 - 12.8 lbs.)

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202202

Anti-Vibration Technology

Extra-Low Vibration achieved
by Counter Weight Mechanism



Redesigned lubricating
mechanism of slider section

BL
MOTOR
High power Brushless motor


Blade ejection lever

relocated to the side of the housing for
increased convenience in removing the blade.



Orbital mechanism

For high speed wood cutting

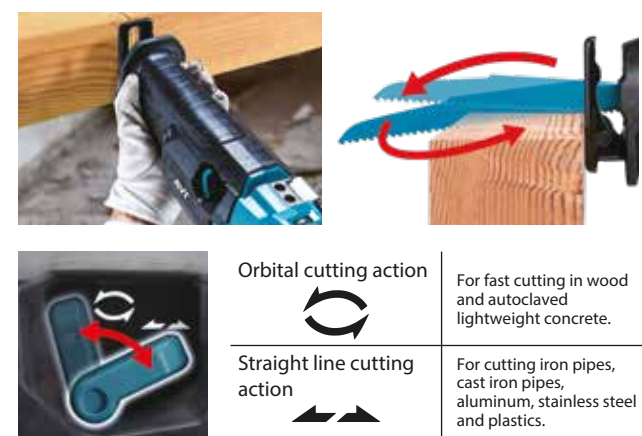

Compatible with a
wide range of
cutting applications

Efficiency of
Wood Cutting
about **30% UP**
Comparison with
Predecessor Model

[Test material: LVL 14" x 1-3/4"]

Efficiency of
Metal Cutting
about **35% UP**
Comparison with
Predecessor Model

[Carbon steel pipe (25A)]

Work amount
on a single full battery charge

Efficiency of Wood Cutting
about **30 cuts**
Battery: BL4025
Test material: LVL 14" x 1-3/4"

Efficiency of Metal Cutting
about **55 cuts**
Battery: BL4025
Test material: Carbon steel pipe (25A)

Dual LED job light
with preglow and
afterglow functions



Tool hook



Variable speed control by dial
enables user to adjust the max
cutting strokes to match the
materials of workpiece.

1,000 - 3,000min⁻¹

