




LED Flashlight
BML803

Satisfy Professional's Needs

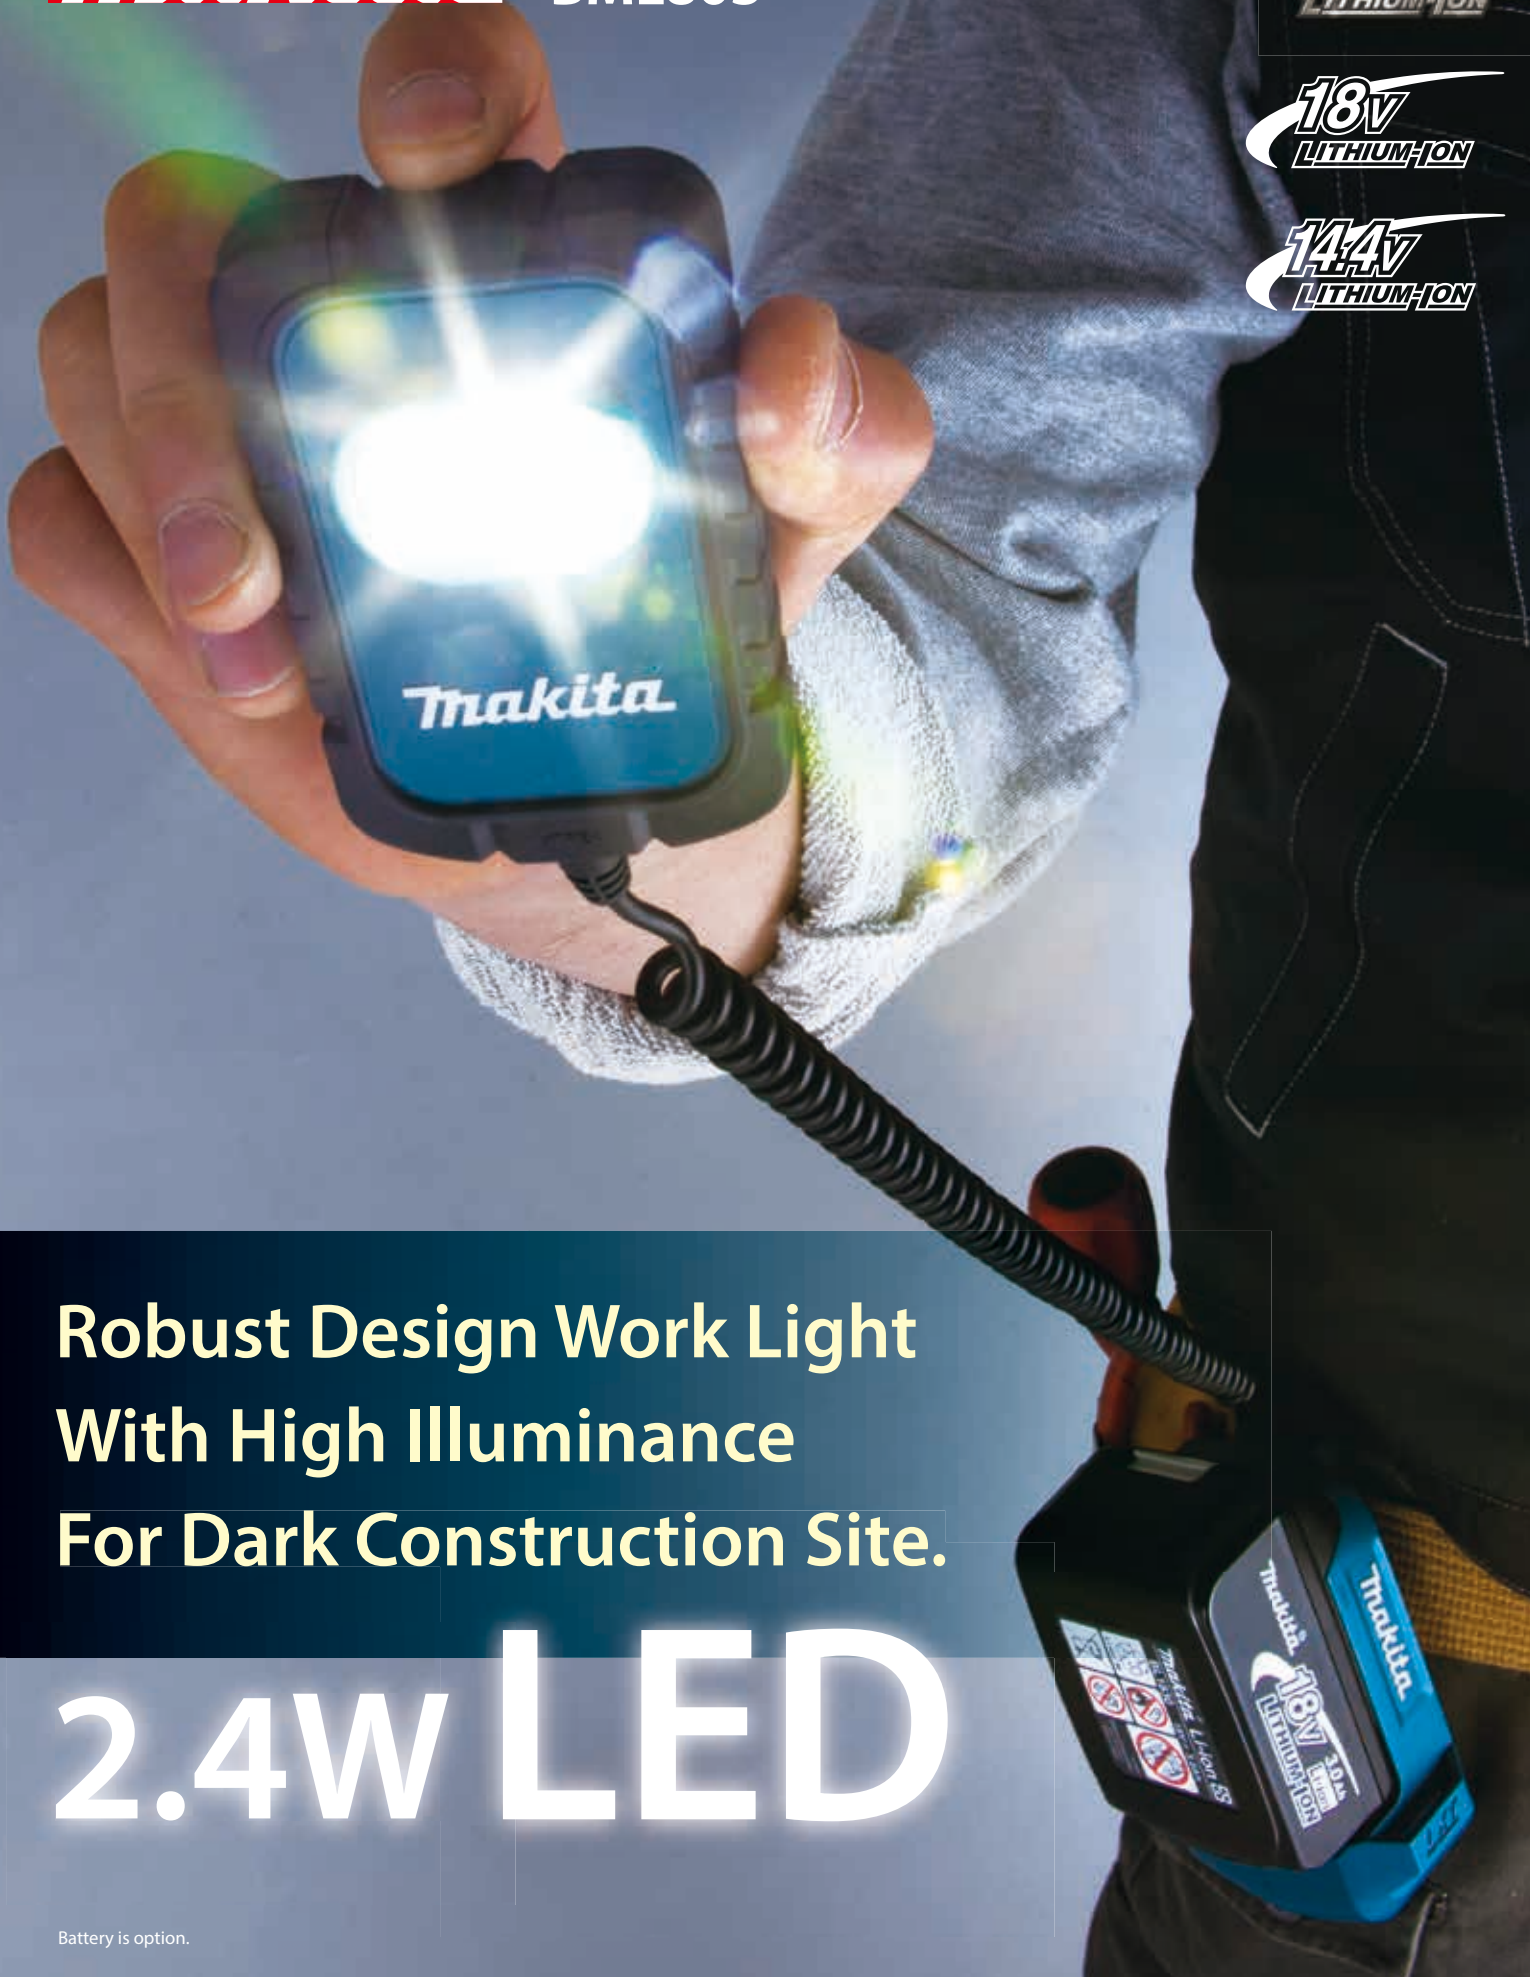

Robust Design Work Light
With High Illuminance
For Dark Construction Site.

2.4W LED

Battery is option.

Long continuous illumination of 24 hours

with a fully charged 18V-3.0Ah battery BL1830 in low mode



Belt clip enables to hook the battery holder section on waist belt, etc.

Light section weighs only **0.12kg** (0.3lbs)



Powered by both 14.4/18V Li-ion battery (option)

Rubber bumpers for sure protection of LED against rough handling.

1.3m Connecting curly cord

Light section can be attached to Battery holder section using Swivel clip.



IPX-4 waterproof design

(Head light section only)

resists splashing water such as a sudden shower, etc.



2 stage push-button switch

enables to select high/ low brightness.



Swivel hook on Light section

enables to hook the light section on a jacket, etc at any angle.




Battery



BL1830: 18V 3.0Ah BL1815: 18V 1.3Ah BL1430: 14.4V 3.0Ah BL1415: 14.4V 1.3Ah

Charger

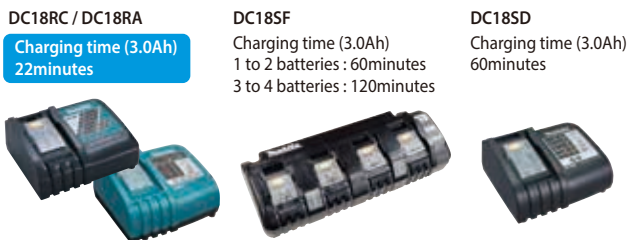

DC18RC / DC18RA

Charging time (3.0Ah)
22minutes

DC18SF

Charging time (3.0Ah)
1 to 2 batteries : 60minutes
3 to 4 batteries : 120minutes

DC18SD

Charging time (3.0Ah)
60minutes

LED Flashlight

BML803 18V, 14.4V

| Continuous use (hours) | Low - 24, High - 16 with BL1830 (3.0Ah) Low - 11, High - 7 with BL1815 (1.3Ah) | Low - 18, High - 12 with BL1430 (3.0Ah) Low - 8, High - 5 with BL1415 (1.3Ah) |
|---|--|---|
| Dimensions (L x W x H) | Light section (without Clip): 99x62x25mm (3-7/8"x2-7/16"x1") | Light section (without Clip): 99x62x25mm (3-7/8"x2-7/16"x1") |
| | Battery holder section: 151x81x89mm (5-15/16"x3-3/16"x2-13/16") with BL1830 151x81x72mm (5-15/16"x3-3/16"x2-13/16") with BL1815 | Battery holder section: 133x81x89mm (5-1/4"x3-3/16"x3-1/2") with BL1430 133x81x72mm (5-1/4"x3-3/16"x2-13/16") with BL1415 |
| Net Weight* | Light section (with cord): 0.12kg (0.3lbs) Battery holder section: 0.86kg (1.9lbs) with BL1830 0.64kg (1.4lbs) with BL1815 | Light section (with cord): 0.12kg (0.3lbs) Battery holder section: 0.75kg (1.7lbs) with BL1430 0.58kg (1.3lbs) with BL1415 |
| Standard Equipment: Battery and Charger are sold separately. | | |

*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BD-AE