




High Power
Durability
Digital
Communication

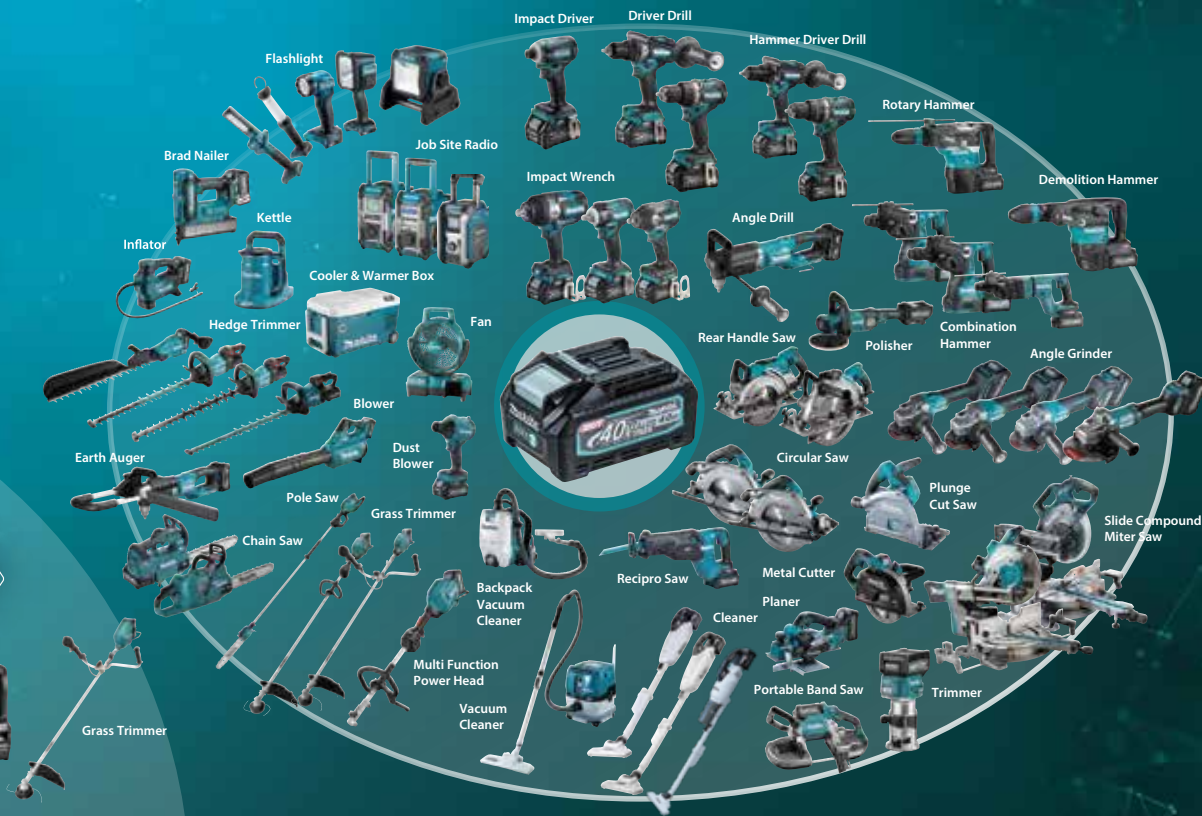

Accessories

Diamond wheel for concrete
Segmented type
355 x 2.8 x 25.4
Part No. E-12996 (EN)



Abrasive cut-off wheel for Metal
355 x 4.3 x 25.4 A24T
5per set
Part No. E-12790-5



Charging Time

	Fast Charging DC40RA	DC40RC
BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Power Cutter

CE001G 355 mm (14")

Brake	Wheel diameter	355 mm (14")
Built-in Job Light	Wheel hole diameter	25.4 mm (1")
	Max wheel thickness	5.0 mm (3/16")
	Min. wheel thickness	2.0 mm (5/64")
	Max cutting capacity	127 mm (5")
	No load speed (RPM)	5,300
	Vibration level	Concrete cutting, Front/ Rear: 2.5 / 2.5 m/s ² or less
	Sound pressure level	109 dB(A)
	Sound power level	120 dB(A)
	Dimensions (L x W x H)	w/ BL4040, BL4050F: 786 x 272 x 433 mm (31 x 10-3/4 x 17") w/ BL4080F: 786 x 283 x 433 mm (31 x 11-1/8 x 17")
	Net weight	12.3 - 14.1 kg (27.1 - 31.1 lbs.)

Standard Equipment : Wrench, Coupling Sleeve, Ring set, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202202



Cordless Power Cutter CE001G 355 mm (14")

Satisfy Professional's Needs



Efficiency of
concrete cutting
about **25 %**
UP
Comparison with
Engine tool

[Cutting depth: 50mm]

Low vibration
Front handle Rear handle
2.0/1.2
m/s

[Concrete cutting]

Max. cutting
capacity

127mm

Cutting work amount Battery: BL4050F x 2
Work volume on a single full battery charge

Cut concrete continuously :
50mm x 300mm
Diamond wheel : 355mm

18cuts



40V^{Li-ion} max + 40V^{Li-ion} max **XGT X2** 80V^{max}

More powerful than engine tools and Low vibration



BL
MOTOR



Concrete cutting speed

CE001G 125

Predecessor engine model **100**

CE001G
Battery: BL4050F x 2 (on a single full battery charge)

Cut concrete continuously: 50mm x 300mm
Diamond wheel: 355mm

slow speed fast

Max. cutting capacity

127mm



Equipped with anti-vibration housing

with built-in spring to absorb the vibration from cutting to integrated front and rear handles.

Low vibration

Front handle Rear handle

2.0/1.2
m/s

[Concrete cutting]

Anti-vibration spring

Anti-vibration housing

Drive unit



Electric brake

XPT

eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather

WG / IPX4
WET GUARD


High water-resistance allows to operate the machine even if it is wet with water.



AFT

Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

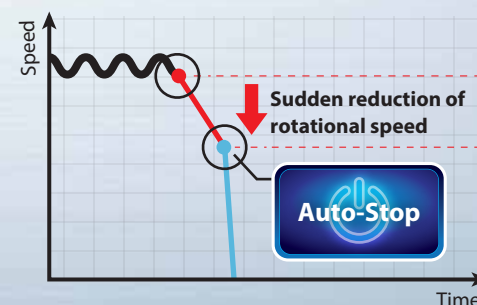


LED job light




- can be turned on/off with a button conveniently located on the rear handle.
- automatically shuts off when the switch trigger is not pulled for 60 seconds.

LED on/off button



Lock-off button

Overload indicator lamp



Water supply kit can be connected.

