



# Cordless Area Worklight DML810



## Max 5,500lm Self-Righting Area Light

Powered by both



and

18V  
LITHIUM-ION

One or Two



Self-righting design



# Max 5,500lm Cordless Area Worklight

## Light diffusing lens

202 super luminous daylight white LEDs: 40.4W (0.2W x 202)

## Inlet type AC power supply cord

Detachable and can be stored compactly on the back of the light body when not in use.

## Reflector

glows in the dark to help you locate the worklight body.

## Padlock hole

for battery theft protection\*  
\*Padlock not included

## Switch


3-stage brightness switch  
On/off Power switch  
Adjustable illumination area switch

## Self-righting design


won't fall over even if bumped.



## 3-stage brightness switch

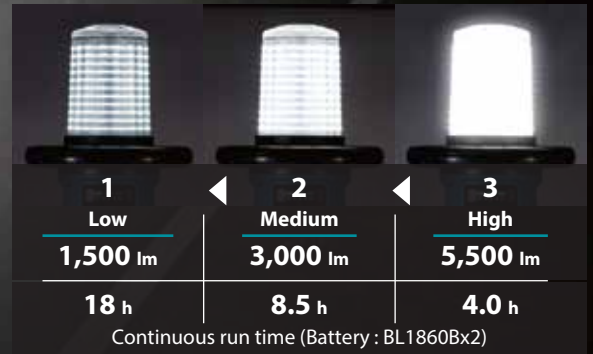

## Adjustable illumination area

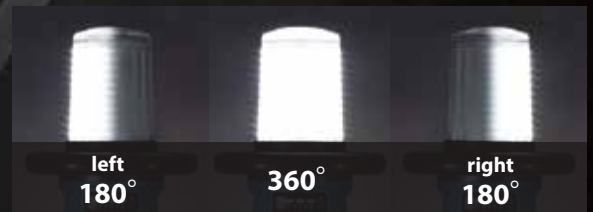

Controller with memory function remembers the brightness setting and the lighting area setting last time you power off, allowing the user to avoid adjusting again.

## Powered by both DC and AC



## IP54

certified dust and water resistance (only with DC power)


## AC outlet for connecting multiple units together

•Up to 8 units can be connected together.  
•Equipped with a circuit breaker for protection from overload.



## Carrying handle

having openings through which anti-theft chain or cable can pass.

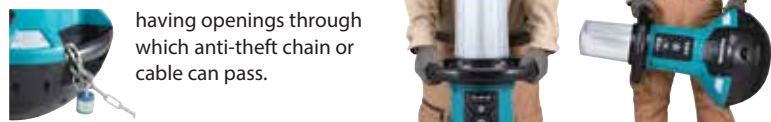

## Battery capacity warning function

automatically notifies about reduction in battery capacity with the decrease of illuminance (Only four LEDs are on for notification).



## Cordless Area Worklight DML810

<b>Run Time (hrs)</b>	High: 4.0 / Medium: 8.5 / Low: 18
<b>Illuminance (High / Med / Low)</b>	at 1m from the light source: 550 / 300 / 150 lx at 3m from the light source: 70 / 40 / 20 lx at 5m from the light source: 25 / 15 / 7 lx
<b>Luminous Flux</b>	High / Med / Low: 5,500 / 3,000 / 1,500 lm
<b>Dimensions (L x W x H)</b>	420x420x787 mm (16-1/2"x16-1/2"x31")
<b>Net weight</b>	13.9 - 15.3 kg (30.6 - 33.7 lbs.)

**Standard Equipment :** AC Power Cord 2.5m (QY00000078)  
**Battery & Charger Sold Separately.**

The weight may differ depending on the attachment(s), including the battery cartridge.  
Items of standard equipment and specifications may vary by country or area.

## CÔNG TY TNHH MAKITA VIỆT NAM

### CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Chấn, TP. Từ Sơn, T. Bắc Ninh, DT: 0222 376 5942 Fax: 0222 376 5941

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI

65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội, DT: 0243 202 2385

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG

102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng, DT: 0236 352 5078 / 0236 352 5178 Fax: 0236 352 5479

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ

386 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ, DT: 0292 389 4358 Fax: 0292 389 4358

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỘT

88 Lê Đức Thọ, P. Thới An, TP. Buôn Ma Thuột, T. Đắk Lắk, DT: 0262 355 4556 Fax: 0262 355 4557

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG

Số 01 Lô D4-01, Dự án Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng, DT: 0225 883 1529

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHÀ TRANG

Là 36/36 đường B6, Khu đô thị Vĩnh Diễm Trung, Xã Vĩnh Ngọc, TP. Nhà Trang, T. Khánh Hòa, DT: 0258 220 0039

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH

Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh, DT: 0283 821 5191