



Cordless Worklight
DML813 / DML814

Max luminous flux
3,000 lm

Max Height
2,240 mm

IP55
certified weather
and dust resistance

DML813
[Spot lighting]



DML814
[Spot lighting]



[Area lighting]



18V
LITHIUM-ION



2,240 mm

↑

The height of light head can be adjusted steplessly

↓

1,250 mm

DML814
Two lighting modes
Spot lighting / Area lighting

Battery capacity warning function
automatically notifies the user about reduction in battery capacity with the decrease of illuminance (Only one LED is on for notification).




Continuous run time (with BL1850B)

High	Medium	Low
3.0 h	5.5 h	10 h

3 brightness settings

High	Medium	Low
3,000 lm	1,700 lm	900 lm


Pivoting range of light head for Spot lighting

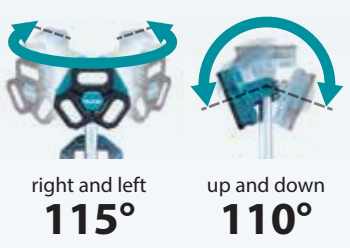

Pivoting range of 3 small light heads for area lighting




Foldable into a compact size for simple storage and transport

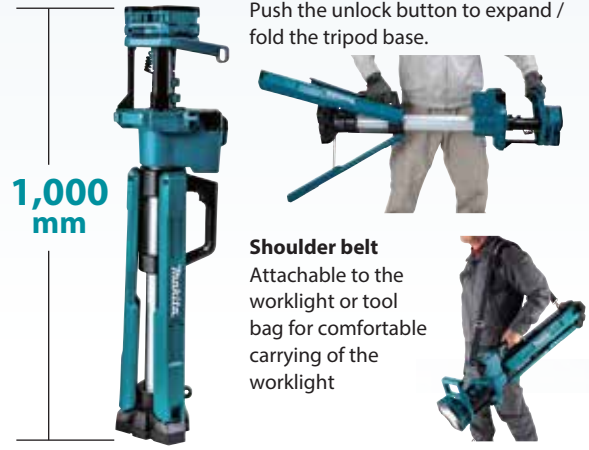

Push the unlock button to expand / fold the tripod base.

Shoulder belt
Attachable to the worklight or tool bag for comfortable carrying of the worklight

DML813
Spot lighting

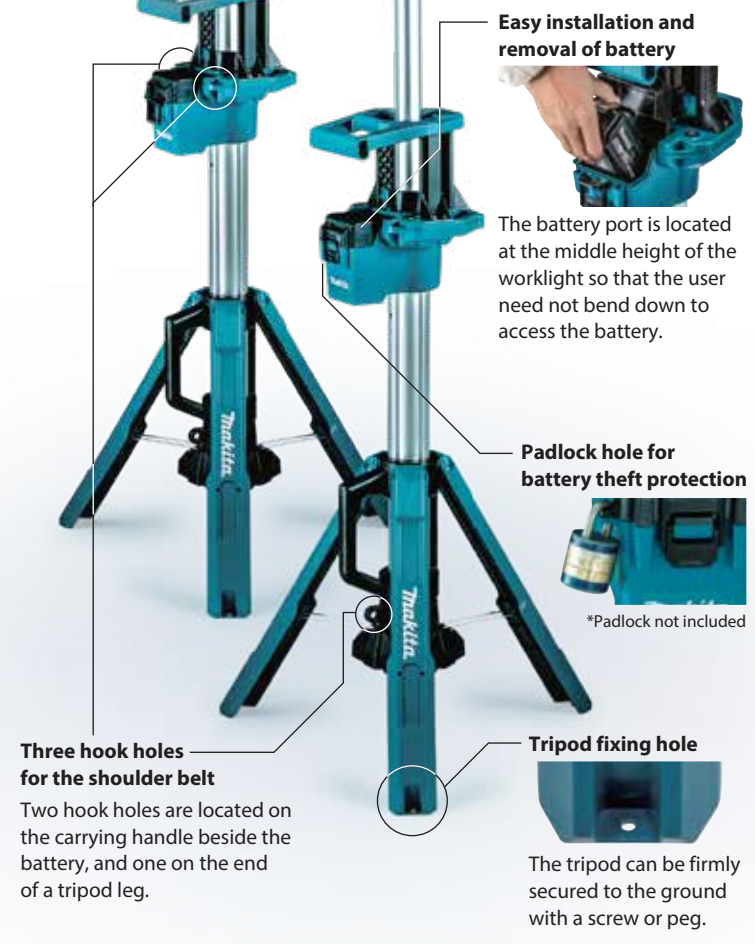

Easy installation and removal of battery

The battery port is located at the middle height of the worklight so that the user need not bend down to access the battery.

Padlock hole for battery theft protection

*Padlock not included

Three hook holes for the shoulder belt

Two hook holes are located on the carrying handle beside the battery, and one on the end of a tripod leg.

Tripod fixing hole

The tripod can be firmly secured to the ground with a screw or peg.

Accessories ● Standard equipment

Tool Bag ●
Part no. : TD00000001



Shoulder Belt ●
Part no. : TD00000002



Cordless Worklight DML813 / DML814

Carrying Case	Run Time (hrs) Illuminance (High / Mid / Low)	w/ BL1850(B) Low / Mid / High: 10 / 5.5 / 3 at 1m from the light source: 1,250 / 750 / 400 lx at 3m from the light source: 130 / 80 / 40 lx at 5m from the light source: 50 / 30 / 15 lx
Standard Equipment : Tool bag (TD00000001), Shoulder belt (TD00000002)	Luminous Flux Dimensions (L x W x H)	High / Mid / Low: 3,000 / 1,700 / 900 lm Folding Position: 260x216x1,000 mm (10-1/4"x8-1/2"x39-3/8") Operating Position (Max Height): 573x658x1,250-2,240 mm (22-1/2"x26"x49-1/4"-88")
	Net weight	DML813: 7.0 - 7.7 kg (15.4 - 17.0 lbs.) DML814: 7.2 - 7.9 kg (15.9 - 17.4 lbs.)

Battery & Charger Sold Separately

The weight may differ depending on the attachment(s), including the battery cartridge. Items of standard equipment and specifications may vary by country or area.

CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6 KCN - BT - DV VSP Bắc Ninh, P. Phú Chấn, TP. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Trần Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5078 / 0236 352 5179 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BUỒN MA THUỘT
Số 1 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk.
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2385

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
386 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lô D1-01, Dự án Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 883 1529