

## Multifaceted reflector enables to illuminate evenly

Our predecessor model



Only center is bright

ML106 / DML808



Entire circle is in uniform brightness

## Zoom function

Wide Light



Spot Light



12 position pivoting flashlight head



Strap hook



## ML106

Continuous illumination (approx) on a single full battery charge: hours




BL1016	5
BL1021B	6
BL1041B	12

Magnet attachment nut for optional magnet attachment

Part No. GM00001683(EU)

Part No. GM00001714



(ML106 Only)



## DML808


Continuous illumination (approx) on a single full battery charge: hours



BL1415N	5.5
BL1430B	9.5
BL1440	15
BL1450	18
BL1460B	20



BL1815N	7.5
BL1820B	10
BL1830B	14
BL1840B	20
BL1850B	26
BL1860B	32

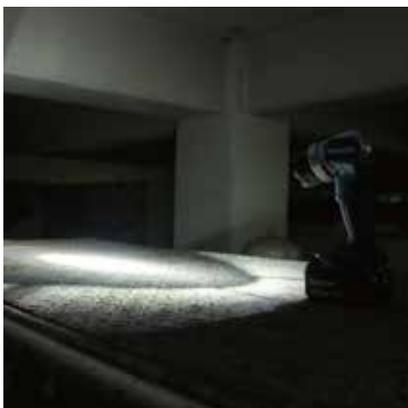

## Cordless LED Flashlight

ML106 12V max / DML808 18V, 14.4V

	ML106 	DML808  
Run Time (hrs)	Up to: 12	Up to: 32
Luminous flux	190 lm	190 lm
Illuminance	at 1m from the light source 170 - 4,500 lx	at 1m from the light source 170 - 4,500 lx
Dimensions (L x W x H)	w/ BL1016/BL1021B: 271x66x93 mm (10-5/8"x2-5/8"x3-5/8") w/ BL1041B: 290x66x93 mm (11-3/8"x2-5/8"x3-5/8")	w/ BL1815N / BL1820B: 280x79x101 mm (11"x3-1/8"x4") w/ BL1830B / BL1840B / BL1850B / BL1860B: 297x79x119 mm (11-3/4"x3-1/8"x4-11/16")
Net weight	0.61 - 0.78 kg (1.3 - 1.7 lbs)	0.73 - 1.09 kg (1.6 - 2.4 lbs)

Battery & Charger Sold Separately

Standard Equipment : Strap Hook

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201712



# Cordless LED Flashlight

ML106 12V max

DML808 18V, 14.4V



## Multifaceted reflector enables to illuminate evenly and Zoom function



DML808



ML106



Wide Light

adjusts illumination range

Spot Light

# 4.9W

High-illuminance single LED