


Công Suất Cao
Độ Bền Cao
Truyền Tín Hiệu Điện Tử

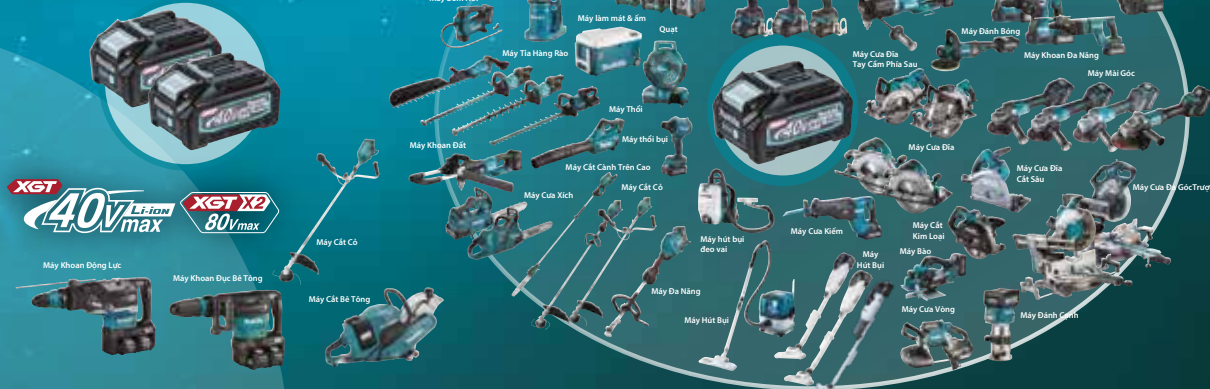

Accessories

Flexible shaft

Size	Part No.
ø32-1.2m	1910E1-5
ø32-1.7m	1910E2-3
ø32-2.4m	1910C2-9
ø38-1.2m	1910E3-1 <i>Coming soon</i>
ø38-2.4m	1910C4-5 <i>Coming soon</i>

photo: 1910C4-5

Adapter set (40Vmax)

Part No. 191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

Battery case H set

Part No. 1910J4-4
For PDC01 and PDC1200



Battery case L set

Part No. 1910J1-0
For BL4050F, BL4080F



Charging Time

Model	Capacity	Fast Charging	
		DC40RA	DC40RC
BL4020	2.0Ah	22 min	30 min
BL4025	2.5Ah	28 min	38 min
*1 BL4040	4.0Ah	45 min	67 min
*1*2 BL4050F	5.0Ah	50 min	85 min
*1*2 BL4080F	8.0Ah	76 min	170 min

*1 Recommended battery *2 Use with Battery case L set

Portable Power Pack (use with Adapter set and Battery case H set)

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Powered by 36V-40Vmax built-in battery



Charger: DC4001

Cordless Concrete Vibrator VR001G / VR003G / VR004G

Electronic 2-Speed	Max output	w/ PDC1200: 550W
Constant Speed	Diameter of vibrator	VR001G: -, VR003G: 32 mm (1-1/4"), VR004G: 38 mm (1-1/2")
	Flexible Shaft Assembly Length	VR001G: -, VR003G: 1.2, 1.7, 2.4 m (3.9, 5.6, 7.9 ft), VR004G: 1.2, 2.4 m (3.9, 7.9 ft)
	Vibrations Per Minute (VPM)	Power mode: 15,500, Normal mode: 12,000
	Work amount on a full battery charge	w/ 32mm-1.2m shaft, w/ BL4040, Power mode: 35 min w/ 32mm-1.2m shaft, w/ BL4040, Normal mode: 50 min 80 dB(A) w/ Flexible shaft: 4.9 m/s ²
	Sound Pressure Level	
	Vibration Level	
	Dimensions (L x W x H)	VR001G: w/o Flexible shaft, w/ BL4020/BL4025/BL4040: 282 x 112 x 258 mm (11-1/8 x 4-3/8 x 10-1/8") w/o Flexible shaft, w/ BL4050F/BL4080F: 296 x 112 x 299 mm (11-5/8 x 4-3/8 x 11-3/4") VR003G: w/ 32mm-1.2m shaft, w/ BL4020/BL4025/BL4040: 1,495 x 112 x 258 mm (59 x 4-3/8 x 10-1/8") w/ 32mm-2.4m shaft, w/ BL4050F/BL4080F: 2,509 x 112 x 299 mm (99 x 4-3/8 x 11-3/4") VR004G: w/ 38mm-1.2m shaft, w/ BL4020/BL4025/BL4040: 1,493 x 112 x 258 mm (58-3/4 x 4-3/8 x 10-1/8") w/ 38mm-2.4m shaft, w/ BL4050F/BL4080F: 2,507 x 112 x 299mm (98-1/2 x 4-3/8 x 11-3/4")
	Net weight	4.2 - 7.8 kg (9.4 - 117.3 lbs.)
	Standard Equipment	: Wrench 8 (781213-9)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. M4-052023-1

CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
102 Triều Nguyễn, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỘT
88 Lê Đức Thọ, P. Thới Mỹ, TP. Buon Ma Thuột, T. Đắk Lắk.
ĐT: 0262 355 4558 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đình, Di An Hoàng Hai Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHA TRANG
88 Lê Đức Thọ, P. Thắng Mỹ, Quận Thủ Đức, TP. Nha Trang, T. Khánh Hòa.
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191



VR001G Tool only
without Flexible shaft



VR003G
with Flexible shaft ø32



VR004G
with Flexible shaft ø38




Suitable for a wide range of jobsites



Constant speed control

allows for stable compaction work.

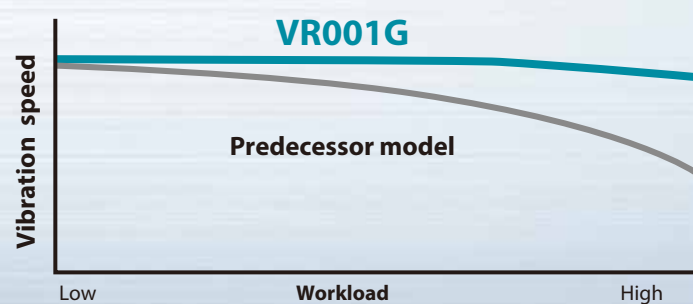

Power mode

For a wide range of concrete compaction, such as of soil floors, pillars, and mat foundations.

Vibration per minute

15,500 min⁻¹

Work amount (on a full battery charge)

35 min

(With ø32mm-1.2m shaft and BL4040 battery)

Normal mode

Ideal for delicate works, such as step finishing or closure of temporary construction openings, where concrete is required not to flow out of the mold.

Vibration per minute

12,000 min⁻¹

Work amount (on a full battery charge)

50 min

(With ø32mm-1.2m shaft and BL4040 battery)

Compatible with large diameter shafts

larger vibration part diameter than the current model and transmits vibration to a wider range to improve compaction efficiency

Model	Vibrator diameter	Flexible shaft length
VR001G	-	-
VR003G	ø32mm	1.2, 1.7, 2.4m
VR004G	ø38mm	1.2, 2.4m

Switch cover

protects switch trigger and lock-on button from being blocked by adhered and hardened material such as concrete.



Lock-on button

Switch trigger

Various Battery covers

are available for all recommended or compatible batteries



The supplied Battery cover is compatible with BL4020/BL4025/BL4040.

The following Battery covers are also available as an option:

- Battery case L set for BL4050F/BL4080F
- Battery case H set for PDC01/PDC1200

XPT eXtreme Protection Technology

