

Lightweight
1.7 kg With BL1860B battery and Dust collect cover attachment

No load speed
20,000 min⁻¹

Accessories ● Standard equipment


Dust collect cover attachment
 Part no. 122C54-6 ●
 Easy-to-use dust collection cover with excellent dust collection performance



Cutting wheel/ thin thickness (Cut-off wheel)
 Part no. D-74815-5
 (Include 1 pcs) ●
 Cutting materials: Steels, Stainless steels



Tungsten carbide grit (Multi carbide wheel)
 Part no. D-74837 ●
 Cutting materials: Drywalls, plastic boards, Ceramic siding boards



Diamond wheel/ rim
 Part no. D-77263 ●
 Cutting materials: Tiles



Charging Time

	Fast Charging	
	DC18RC	DC18SD
BL1815N 1.5Ah	15 min	30 min
BL1820B 2.0Ah	24 min	45 min
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min

Cordless Compact Cut Off

DMC300Z	
● Brake	Wheel diameter 76 mm
● Reversing	Hole diameter 10.0 mm
● Anti-restart function	Wheel plate thickness 1.0 mm
● Constant Speed	No load speed (RPM) 20,000
● Dust Collection	Max cutting capacity w/ Dust cover attachment: 13.5 mm w/o Dust cover attachment: 16.0 mm
● Built-in Job Light	Circumference of grip portion 156 mm
● Carrying Case	Sound pressure level 88 dB(A)
	Sound power level 99 dB(A)
	Vibration level 3.0 m/s ²
	Dimensions (L x W x H) w/ BL1815N / BL1820B: 253 x 104 x 182 mm w/ BL1830B / BL1840B / BL1850B / BL1860B: 271 x 104 x 182 mm
	Net weight 1.2 (BL1815N) - 1.7 kg (BL1860B)
	DMC300Z: Battery & charger are sold separately.

Standard Equipment: Dust collect cover attachment (122C54-6), diamond wheel 76x10mm (D-77263), tungsten carbide grit 76x10mm (D-74837), cutting wheel / thin thickness (1 pcs), hex wrench (783202-0).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-072023-1

CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
 Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.
 ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
 102 Trưng Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
 ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỘT
 88 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk.
 ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
 Số 01 Lê Duẩn, D. An Hoàng Hwy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
 ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
 85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
 ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
 Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
 ĐT: 0283 821 5191

76mm cutter suitable for small cutting jobs

BL MOTOR



Cutting wheel/ thin thickness (Cut-off wheel)
Cutting materials: Steels, Stainless steels



Dust collect cover attachment can be attached directly to Wheel cover.
for connection to vacuum cleaner, helping keep a job site clean



Tungsten carbide grit (Multi carbide wheel)
Cutting materials: Drywalls, plastic boards, Ceramic siding boards



Diamond wheel/ rim
Cutting materials: Tiles

Work amount on a full battery charge battery: BL1860B	
Metal cutting Cut off M10 steel rods about 283 pcs Wheel used: cut-off wheel	Tile cutting Cut off 300x5.5mm tiles about 23 m Wheel used: diamond wheel

Overall length (with BL1860B) 271mm


Wheel Outer diameter 76mm

Net weight (with BL1860B) 1.7kg


Max cutting capacity 16mm
Enough cutting depth for cutting thin sheet metals, pipes, etc.

Circumference of grip portion 156mm
Easy-to-grip small diameter grip for more comfort and control


Reverse switch
enabling to deflect sparks and dust according to working situation

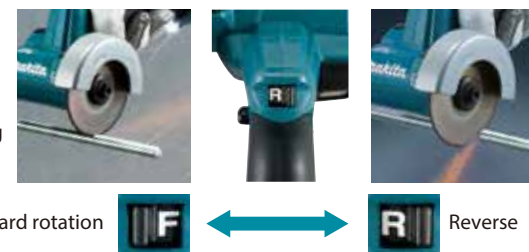

Constant speed control
minimizes the reduction in blade speed to provide stable cutting.

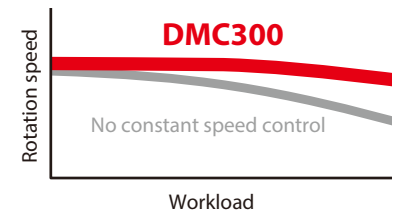

AFT Active Feedback sensing Technology
shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

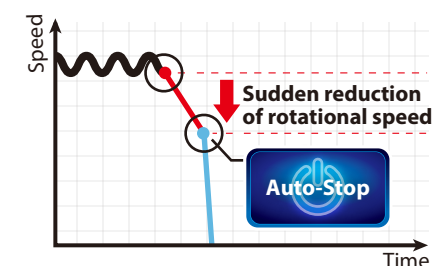

Trigger switch & Electric brake



XPT eXtreme Protection Technology



Anti-restart function

Single LED job light
• With afterglow function
• Also used as overload display (Overload will be notified by blinking)



18V LITHIUM-ION