



■ Accessories Phụ kiện kèm theo ● DCU603 ● DCU604 ● DCU605

Dump bucket 200 set

Part No. 191B69-8 ●

Loading platform of dump bucket type

*Can be used by attaching to Dump unit installed on Base unit (Wheelbarrow body).



Dump unit set

Part No. 191B63-0 ● ●


Damp unit for Pipe frame carrier or Dump bucket 200



Tire 330 (single) set

Part No. 1911K4-7

For lawn and pavement

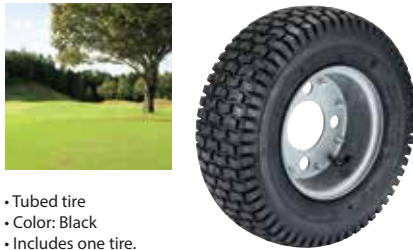

- Tubed tire
- Color: Black
- Includes one tire.

Carrier set

Part No. 191B67-2 ●

- Pipe frame carrier
- Variable-size loading platform

*Can be used by attaching to Dump unit installed on Base unit (Wheelbarrow body).



Flat bucket set

Part No. 1911B3-6 ●

Includes Flat bucket* and Flat bucket base.
*equipped with a capped nozzle for draining liquid



Battery Powered Wheelbarrow

DCU603 / DCU604 / DCU605



Charging Time

	Fast Charging		DC18SD
	DC18RC	DC18RD	
BL1815N 1.5Ah	15 min	30 min	
BL1820B 2.0Ah	24 min	45 min	
BL1830B 3.0Ah	22 min	60 min	
BL1840B 4.0Ah	36 min	90 min	
BL1850B 5.0Ah	45 min	110 min	
BL1860B 6.0Ah	55 min	130 min	

Battery Powered Wheelbarrow

DCU603Z / DCU604Z / DCU605Z

	Variable Speed	Max Load Capacity	Flat ground (0 - 3 degrees): 300 kg Slope (3 - 12 degrees): 180 kg Forward: 0-1.5/3.5/5.0 km/h Reverse: 0-1.0 km/h Front/Rear: ø330 mm / ø210mm (ø13" / ø8-1/4")
	Brake	Traveling Speed	7.2 km* 100 min*
	Reversing	Tire Diameter	12°
	Electronic 3-Speed	Potential travel distance	DCU603: 1,480 x 730 x 820 mm DCU604: 1,450 x 730 x 820 mm DCU605: 1,440 x 730 x 820 mm
	Constant Speed	Continuous run time on a single battery (approx.)	DCU603: 122 kg (BL1815N x2) - 124 kg (BL1860B x2) DCU604: 119 kg (BL1815N x2) - 120 kg (BL1860B x2) DCU605: 104 kg (BL1815N x2) - 106 kg (BL1860B x2)
	Soft Start	Max Climbing Capacity	
	Built-in Job Light	Dimensions (L x W x H)	
		Net weight	

*With four BL1860B batteries / On flat ground, with lights off, loaded with 300kg, at 5.0km/h

DCU603Z/DCU604Z/DCU605Z: No battery, charger.

Standard Equipment: DCU603Z: Dump bucket 200 set (191B69-8), dump unit set (191B63-0).

DCU604Z: Carrier set (191B67-2), dump unit set (191B63-0).

DCU605Z: Flat bucket set (1911B3-6).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

CÔNG TY TNHH MAKITA VIỆT NAM

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, X. Phú Chấn, TX. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HÀ NỘI

65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH ĐÀ NẴNG

102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng.
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH CẦN THƠ

366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ.
ĐT: 0292 389 4398 Fax: 0292 389 4398

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH BUỒN MA THUẬT

88 Lê Đức Thọ, P. Thủ Đức, TP. Thủ Đức, T. Bình Lãng.
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HẢI PHÒNG

Số 01 Lê Duẩn, D. an Hoàng Hạ Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH NHA TRANG

Lô 36 - 38 đường B6 Khu đô thị Vĩnh Diễm Trung, Xã Vĩnh Ngọc, TP. Nha Trang, T. Khánh Hòa
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG

CHI NHÁNH HỒ CHÍ MINH

Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.
ĐT: 0283 821 5191

DCU603

Manual dump
+ Dump bucket



DCU604

Manual dump
+ Pipe frame carrier



DCU605

Flat bucket



Powered by two 18V LXT batteries in series

on flat ground (0 - 3 degrees) | on slope (3 - 12 degrees)

Max load capacity **300kg** | **180kg**

Traveling distance **7.2km**
with BL1860B x 4

Traveling speed change

- Selection of 3 Forward speeds and F/R rotation by push button
- Stepless variable speed control by switch trigger in each range

Forward	Reverse
3 speeds (1.5/3.5/5.0 km/h)	1 speed (1.0 km/h)



Max climbing ability **12°**

High power Brushless motor **BL MOTOR**

1 Hand brake lever

- Brake for speed reduction while driving the wheelbarrow
- Can be used as a parking brake by locking this lever.


2 Electric brake plus Electromagnetic brake

Electric brake

- You can minimize the chance of load collapse by releasing the switch trigger to activate soft electric brake.

Electric brake

- Powerful electromagnetic brake is activated to keep the motor braked when the driving speed decreases almost to 0km.

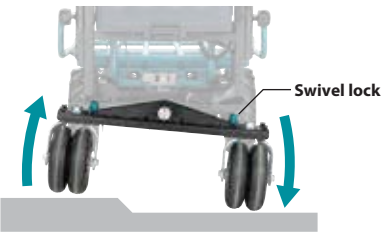

Driving wheels (Front wheels) touch the ground stably.

Rear wheel axle is designed to tilt to enable Front wheels (driving wheels) to stably touch the ground for reliable driving even on bumpy road surfaces.


Double tires (Rear wheels only)

Double tires, each of which rotates independently, improve swivel performance.



Headlights

- turn on/off by pressing a light button on the battery box.
- turn off automatically with no operation for 10 minutes.



Tool-less handle height adjustment

Handle height can be adjusted according to user's height without tool simply by turning 2 knob screws.



Neutral mode

shuts off the power transmission between the motor shaft and the axle in case of no battery installation, low battery capacity or broken motor, enabling to drive the wheelbarrow manually.



Two or four batteries can be installed for a 2-series / 2-parallel connection for a secure amount of work.



Wet Guard / IPX4-compatible

High water-resistance allows to operate the machine even if it is wet with water.



DCU603

Manual dump + Dump bucket

- Rust-free plastic bucket accepts wet loads.
- Inside bottom and front faces are angled for easy dump operation.



Manual dump

designed for increased efficiency in unloading

Bucket capacity

Heaped capacity	200 L
Full liquid capacity	100 L

DCU604

Manual dump + Pipe frame carrier

Ideal for container boxes or bagged materials



Manual dump

High unloading efficiency

Telescopic loading platform

DCU605

Flat bucket

- Rust-free plastic bucket accepts wet loads.
- Optimal for operations not requiring dump function such as feeding in stables



There is no screw on the inside of the bucket, allowing for smooth unloading operation using tool such as a clay-spade.



Bucket capacity

Heaped capacity	295 L
Full liquid capacity	250 L