


High Power
Durability
Digital Communication



XGT
40V Li-ion max **XGT X2**
80V max

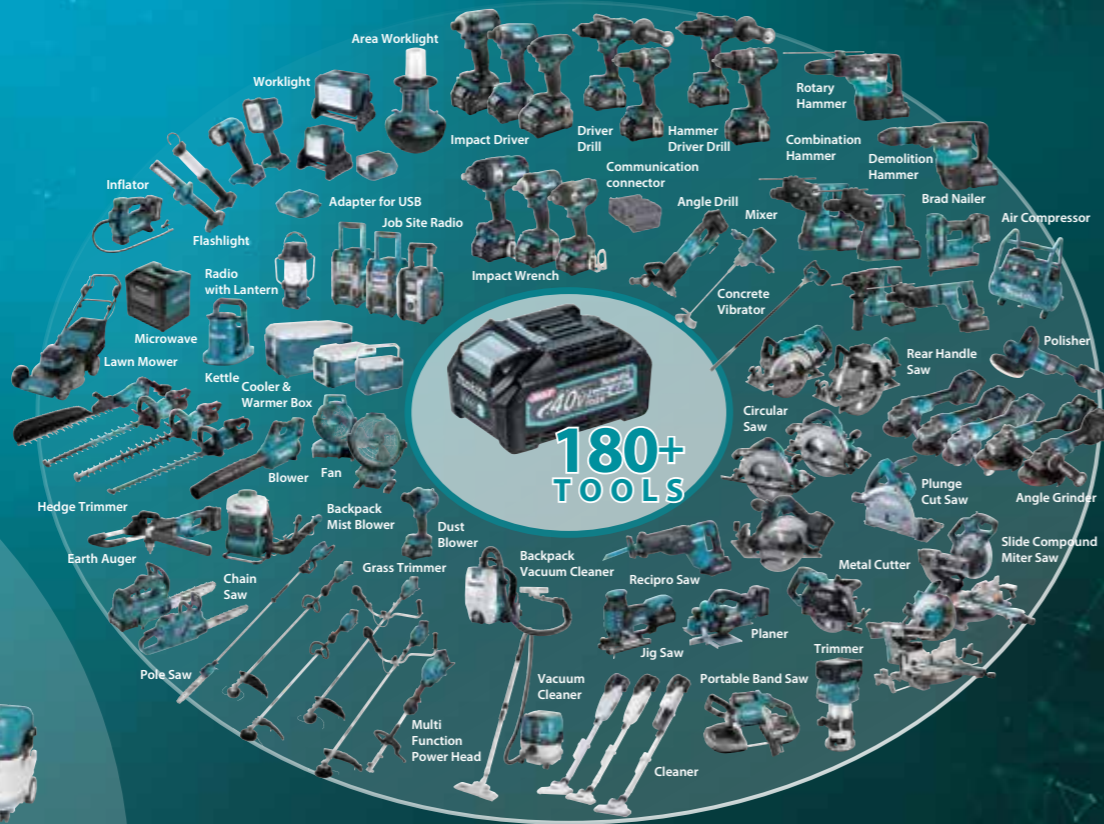

■ Cordless Impact Driver
TD003GA201/TD003GZ

BL XPT



Max fastening torque
210 N·m

Simple impact power selection



4 modes
Max/ Hard/ Med./ Soft for bolt
1 T-mode
for thin metal only

One LED job light each on both sides



Light mode

One-touch bit installation



Smoother installation of the bit has been achieved by reducing the resistance against insertion of the bit.



■ Charging Time

	Fast Charging		Standard Charging	
	DC40RA	DC40RC	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min	30 min	38 min
*1 BL4025 2.5Ah	28 min	38 min	38 min	45 min
*1 BL4040 4.0Ah	45 min	67 min	67 min	85 min
BL4050F 5.0Ah	50 min	85 min	85 min	170 min
BL4080F 8.0Ah	76 min	170 min	170 min	

*1 Recommended battery

■ Cordless Impact Driver

TD002GD202/TD002GZ01

Variable Speed	Capacity	Machine screw: M4 - M8 (5/32 - 5/16") / Standard bolt: M5 - M16 (3/16 - 5/8") High strength bolt: M5 - M14 (3/16 - 9/16") Coarse thread (in length): 22 - 125 mm (7/8 - 4-7/8")
Brake	Hex shank	6.35 mm (1/4")
Reversing	No load speed (RPM)	Max / Hard / Med. / Soft / Wood / Bolt (1) / Bolt (2) / Bolt (3) / T (1) / T (2) mode: 0 - 3,700 / 0 - 3,200 / 0 - 2,100 / 0 - 1,100 / 0 - 1,800 / 0 - 2,700 / 0 - 3,700 / 0 - 3,700 / 0 - 2,900 / 0 - 3,700
Electronic 4-Speed	Impacts per minute (IPM)	Max / Hard / Med. / Soft / Wood / Bolt (1) / Bolt (2) / Bolt (3) / T (1) / T (2) mode: 0 - 4,600 / 0 - 3,600 / 0 - 2,600 / 0 - 1,400 / 0 - 4,600 / 0 - 4,600 / 0 - 2,600
Constant Speed	Fastening torque	Max / Hard / Med. / Soft: 170 / 50 / 20 N·m (1,510 / 440 / 180 in.lbs.)
Built-in Job Light	Max fastening torque	220 N·m (1,950 in.lbs.)
Carrying Case (TD002GD202 only)	Vibration level	Impact tightening of fasteners of the maximum capacity of the tool: 12.9 m/s ²
	Sound pressure level	94 dB(A)
	Sound power level	105 dB(A)
	Dimensions (L x W x H)	w/ BL4020 / BL4025: 119 x 86 x 247 mm (4-11/16 x 3-3/8 x 9-3/4") w/ BL4040: 119 x 86 x 252 mm (4-11/16 x 3-3/8 x 9-7/8")
	Net weight	1.7kg (BL4020) - 2.9kg (BL4080F)
	Standard Equipment :	TD002GD202: 2 battery 2.5 Ah (BL4025), fast charger (DC40RA). TD002GZ01: no battery, charger.
		(+) truss head screw M4X12 (266622-8), hook (346317-0), phillips bit (+) 2-65.

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-052023-1

Work amount
310 pcs.
Battery: BL4025
on a full battery charge

Drove 120mm coarse thread screws into melapi.

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5/5, Đường Số 5, KCN - BT - DV VSP Bắc Ninh, X. Phú Châu, TX. Từ Sơn, T. Bắc Ninh,ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
102 Triệu Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng,ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
386 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ,ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đại Hành, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng,ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,ĐT: 0283 821 5181



Anti-bit wobbling structure

New appearance design
The current design has been changed by adding camouflage pattern and more.

4 LEDs on the front of tool head

New one-touch bit installation
Reduced resistance allows for easier bit installation.

Quick mode-switching button

Variable speed switch

Ergonomically designed handle



- Brighter illumination on the workpiece obtained by:
 - locating 4 LEDs on the front of tool head.
 - reducing projections that project from both sides of tool head and body.
- Higher visibility of the workpiece achieved by using a newly designed LED lens to make the shadow of bit lighter.
- With preglow and afterglow functions.
- 3 brightness settings.



Light mode

- To turn on the light, set F/R change lever in the neutral position and pull the switch trigger. To turn off the light, pull the switch trigger again.
- The light turns off automatically one hour after turned on.

XPT
eXtreme Protection Technology



Dual spring technology

Optimal impact blow suppresses increase in recoil and vibration, which occur after the tool starts impact blow.



The hammer is designed to be driven by a dual spring unit consisting of two types of springs with different load capacities.

Increased screw tightening speed

Work efficiency

Drove 120mm coarse thread screws into melapi.

10% UP

Work efficiency

Drove ø9 x 90mm lag screws into melapi.

25% UP

4-speed power selection



Max [4] 4,600 min⁻¹

Driving screws to underwork materials, tightening long screws or bolts.

Hard [3] 3,600 min⁻¹

Example of application: Driving screws to underwork materials, tightening bolts.

Medium [2] 2,600 min⁻¹

Example of application: Driving screws to finishing boards or plaster boards.

Soft [1] 1,400 min⁻¹

Example of application: Tightening sash screws or small screws such as M6.

6 Assist modes



Wood mode

4,600 min⁻¹

Purpose Tightening long screws.

This mode helps to prevent a screw from falling at the beginning of driving. The tool drives a screw with low-speed rotation at first. After the tool starts to impact, the rotation speed increases and reaches the maximum speed.



Teks screw (thin metal)

Purpose Driving self-drilling screws to a thin metal plate with good finish.

This mode helps to prevent the screws from over-tightening. It also accomplishes quick operation and good finish at the same time. The tool drives a screw with high-speed rotation and stops soon after the tool starts to impact.

Teks screw (thick metal)

2,600 min⁻¹

Purpose Driving self-drilling screws to a thick metal plate with good finish.

This mode helps to prevent the screws from breakage and stripping. It also accomplishes quick operation and good finish at the same time. The tool drives a screw with high-speed rotation and slows down the rotation when the tool starts to impact.



Bolt mode **Purpose** Clockwise: Preventing over tightening of bolts. / Counterclockwise: Loosening bolts.

Bolt mode 1

Clockwise: The tool stops automatically as soon as it has started impact blows.

Counterclockwise: The impact force is 2. The tool stops automatically as soon as it has stopped impacting.

Bolt mode 2 4,600 min⁻¹

Clockwise: The tool stops automatically approximately 0.3 second later from the moment that the tool has started impact blows.

Counterclockwise: The impact force is 4. The tool stops automatically as soon as it has stopped impacting.

Bolt mode 3 4,600 min⁻¹

Clockwise: The tool stops automatically approximately 1 second later from the moment that the tool has started impact blows.

Counterclockwise: The tool slows down the rotation after it has stopped impacting.