

**Various options**    **Standard equipment:**

**Cyclone jet nozzle set**  
Part no. 197824-4  
A spiral jet is ejected. Suitable for removing stubborn dirt.

**Cyclone guard set**  
Part no. 197864-2  
Reduces splash back when cleaning corners with the cyclone jet nozzle.

**Variospray nozzle set**  
Part no. 1912Y4-1  
**Variospray nozzle ext. set**  
Part no. 1912Y5-9  
Jet pressure can be adjusted by rotating the nozzle.

**Variospray lance set**  
Part no. 1912Y6-7  
Jet pressure can be adjusted by rotating the nozzle.

**Variable nozzle set**  
Part no. 197822-8  
Jet width can be adjusted from 0° to 25° by rotating the front end of the nozzle.

**Foam nozzle set**  
Part no. 1912Y2-5  
Detergent can be sprayed as foam.

**Wash brush set**  
Part no. 197828-6  
A nozzle equipped with a brush. Useful for washing out dirt while scrubbing with brush.

**Rotating brush set**  
Part no. 197831-7  
Three brushes inside rotate slowly when ejecting the jet. Suitable for cleaning light dirt on an exterior wall, car body, bath tub, etc.

**Under body spray lance set**  
Part no. 197859-5  
An extra long spray lance with angled nozzle. Best for cleaning hard-to-reach areas such as car under body and roof gutter.

**Extension pipe set**  
Part no. 197870-7  
Pipes to extend the length of the trigger gun. Three different lengths are available by changing the number of the pipes to be used.

**Accessory joint set**  
Part no. 197853-7  
A joint to connect with a nozzle from other model.

**Trigger gun set**  
Part no. 197842-2

**High pressure extension hose**  
5m, 8m, 10m  
Part no. 197845-6  
5m: 197847-2  
10m: 197847-2  
15m: 197850-3  
Total length up to 20m  
Extension hose to connect the high pressure washer body with the trigger gun.

**High pressure hose**  
Length:  
5m (PVC): 126766-5

**Twist prevention joint set**  
Part no. 197867-8  
Prevents the high-pressure hose from being twisted.

**One touch joint set**  
Part no. 197883-8  
For commercial hose connection

**Hose assembly set**  
Length: 3m  
Part no. 1910R1-6  
A hose assembly to connect a faucet to the product, or the strainer assembly to the product.

**Strainer assembly set**  
Part no. 1910R2-4  
A strainer assembly to supply water from a tank or reservoir. Use the hose assembly to connect to the product.

**Self-suction hose set**  
Part no. 197873-1  
Replace the water hose with this set to supply water from a tank or reservoir.

**Absorption connector G3/4**  
Part no. 122F22-7  
With filter

**Pipe cleaning hose**  
Part no. 197837-5 (10m)  
197840-6 (15m)  
For cleaning and unclogging plumbing and downpipes.

**Charging Time**

	Fast Charging		Standard Charging	
	DC40RA	DC40RC	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min		
BL4025 2.5Ah	28 min	38 min		
BL4040/F 4.0Ah	45 min	67 min		
*BL4050F 5.0Ah	50 min	85 min		
*BL4080F 8.0Ah	76 min	170 min		

\*1) Recommended battery

**Cordless High Pressure Washer**

**HW001GZ**

- Electronic 3-Speed
- Anti-restart function

**Standard Equipment:**

Hose assembly set (1910R1-6), strainer assembly set (1910R2-4), trigger gun set (197842-2), cyclone jet nozzle set (197824-4), high pressure extension hose 5m (126766-5), extension set (191U84-6), variospray nozzle set (1912Y4-1), absorption connector G3/4 (122F22-7), cleaner pin set (197879-9)

<b>Max. Flow Rate</b>	7.0 L/min
<b>Regular Flow Rate</b>	Mode 1/ 2/ 3: 3.0/ 4.2 / 5.5 L/min
<b>Max Permissible Pressure</b>	11.5 MPa
<b>Regular Pressure</b>	Mode 1/ 2/ 3: 3.0/ 5.5 / 8.5 MPa
<b>Max Feed Temperature</b>	40 °C
<b>Max Suction Height</b>	1 m
<b>Max Run Time</b>	w/ BL4050F x2: Mode 1/ 2/ 3: 60/ 30/ 18 min
<b>Hose Length</b>	5 m
<b>Noise level</b>	84 dB(A)
<b>Dimensions (L x W x H)</b>	334 x 383 x 520mm
<b>Net weight</b>	10.3 kg (BL4020) - 13.4 kg (BL4080F x2)
<b>HW001GZ:</b>	Battery & charger are sold separately



Max. permissible pressure

**11.5** MPa

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-082023-1

**CÔNG TY TNHH MAKITA VIỆT NAM**

Kho 456, Block 16, 18/12 Đường số 3, KCN VSPP HL P, Hòa Phú, TP, Thủ Đức, Bình Dương  
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

**CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC**  
Khu 5, Số 1, Đường Số 8, KCN - BT - DV VSPP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.  
ĐT: 0222 376 5942 Fax: 0222 376 5941

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI**  
85 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.  
ĐT: 0243 202 2585

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG**  
Số 40, Đường Chi Lăng, P. Hải Châu B, Q. Hải Châu, TP. Đà Nẵng.  
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ**  
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ.  
ĐT: 0292 389 4358 Fax: 0292 389 4358

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỘT**  
88 Lê Đức Thọ, P. Thới An, TP. Buôn Ma Thuột, T. Đắk Lắk.  
ĐT: 0262 355 4556 Fax: 0262 355 4557

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG**  
Số 01 La Dĩnh, Dự án Hoàng Hới Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.  
ĐT: 0225 883 1529


**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHÀ TRANG**  
Lô 36-38 đường B6, Khu đô thị Vĩnh Biêm Trưng, Xã Vĩnh Ngọc, TP. Nhà Trng, T. Khánh Hòa

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH**  
Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.  
ĐT: 0281 821 5191



Two in parallel or one

## Good mobility and transportability

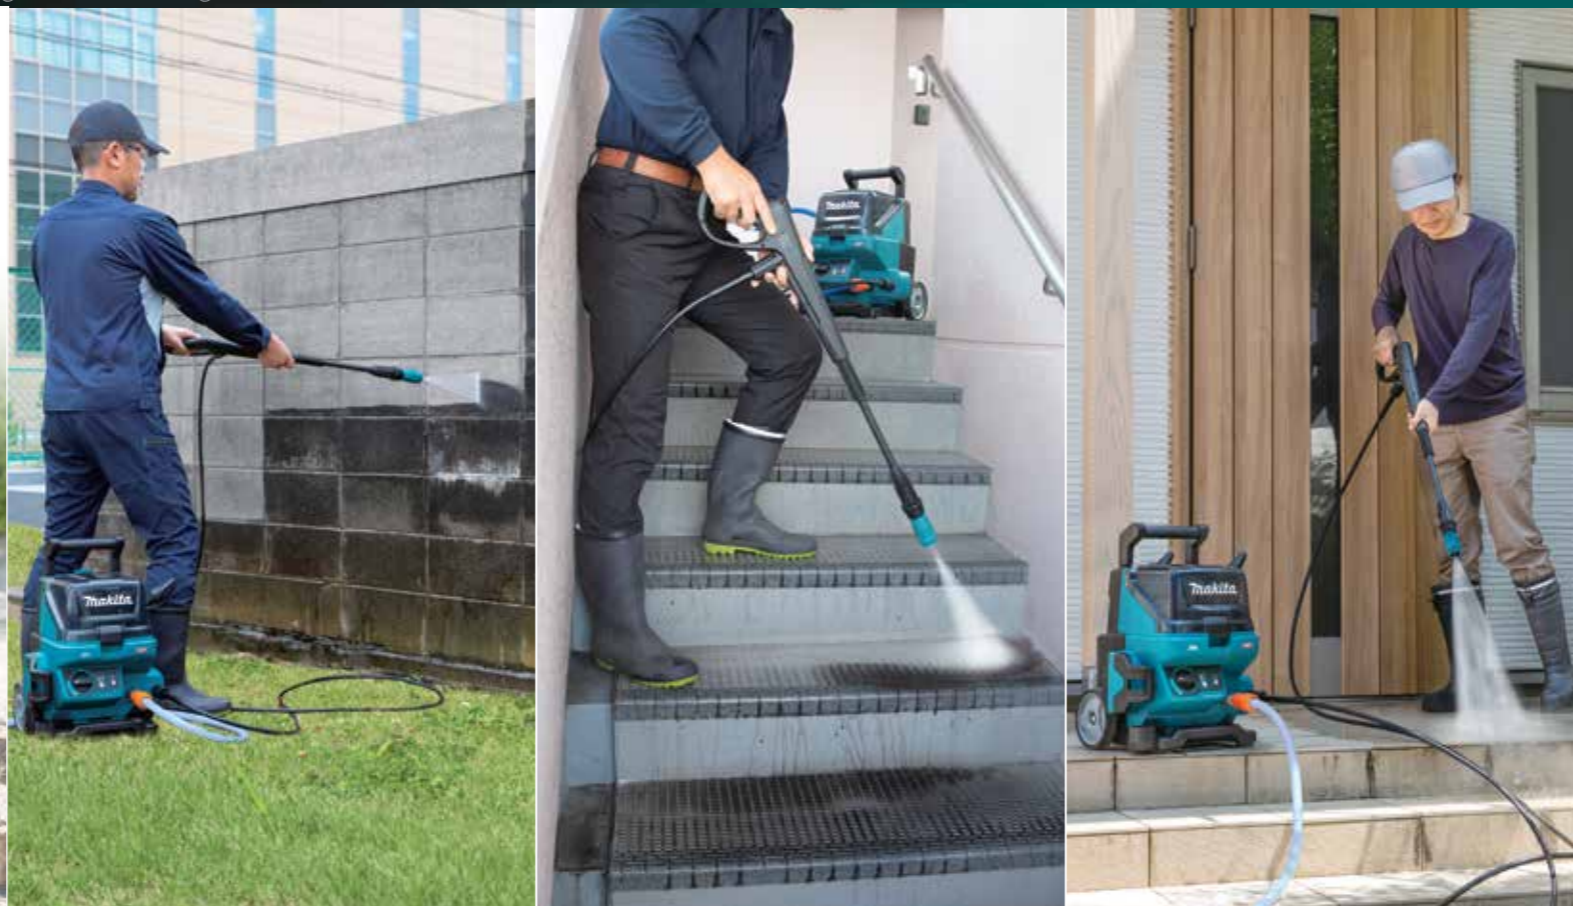

### Large diameter wheels

Equipped with  $\phi 140\text{mm}$  wheels, allowing for good mobility even on bumpy road surfaces.



**3 operation modes; operation mode can be selected to suit the contamination degree of the object to be cleaned.**

Max permissible pressure **11.5** MPa

### 3 operation modes

Mode With Vario-spray nozzle	Mode 3	Mode 2	Mode 1
Regular pressure	8.5Mpa	5.5Mpa	3.0Mpa
Regular flow rate	5.5L/min	4.2L/min	3.0L/min
Continuous use*	18min	30min	60min
Examples of recommended work	Washing of building exterior, etc.	Washing of vehicles, farm equipment, etc.	Light washing work

\* (approx) on fully charged batteries (with two BL4050F batteries)



**BL MOTOR** High power brushless motor

**IPX5**

rated for weather and water resistance



Telescopic handle for easy transportation and storage



### Self-priming function

- Water can be supplied not only from faucet but also from water reservoirs, such as poly tanks, large buckets, using this function.
- Max suction height: 1m
- Minimal water level: 15mm
- No need to operate air drain valve



### Accessory storage

Side section: Trigger gun  
Rear section: High pressure hose, Foam nozzle, Lance



### NEW Foam nozzle set

- New foam nozzle with improved foaming performance
- Bottle capacity: 350mL

