

**Lawn care/Grass care**

**Cordless Lawn Mower**  
**LM002G (530mm)**

40V max



Steel deck

**LM004G (430mm)**

40V max



Plastic deck

**Cordless Scarifier**  
**UV001G (380mm)**

40V max



**Cordless Grass Trimmer**  
**UR012G**

40V max x2



Max Output  
**2.0 kW**

**Cordless Grass Trimmer**  
**UR013G**  
**UR014G**

40V max



Max Output  
**1.5 kW**

**UR006G**  
**UR007G**

40V max



Max Output  
**1.0 kW**

**UR002G**

40V max



Max Output  
**0.55 kW**

**UR016G**  
**UR017G**

40V max



Max Output  
**0.6 kW**

**Cordless Multi Function Power Head**  
**UX01G**

40V max



Max Output  
**1.0 kW**

**Cordless Blower**  
**UB001G**

40V max



**Accessories** ● Standard Equipment

Blade type	Model (size)	Applications and features
<b>Blade (2-tooth bar blade)</b> No. 1913H4-8 ●	430mm	<ul style="list-style-type: none"> <li>Standard blade for both grass collection and mulching</li> <li>Features Improved grass collecting performance achieved by redesigning blade tips to increase air flow volume.</li> </ul>
<b>Mulching blade</b> No. 1913H6-4		<ul style="list-style-type: none"> <li>Cuts grass clippings into small particles and scatters them evenly on the ground for mulching.</li> <li>Ensures proper air flow volume required for mixing grass clippings in the deck.</li> </ul>

**Mulching plug**

Size: 430mm  
No. 1913H8-0 ●  
Essential component for mulching



**Charging Time**

Battery	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F 8.0Ah	76 min	170 min

\*1 Recommended battery

Cordless Lawn Mower	
LM004G 430 mm	
Brake	<b>LM004G</b>
Anti-restart function	430 mm
	Adjustment range: 20 - 75 mm
	Stage: 8
	No load speed (RPM)
	3,800
	Wheel diameter
	140 / 165 mm
	Actual mowing area on full battery charge
	w/ BL4080F: 830 m <sup>2</sup>
	Continuous run time on full battery charge
	w/ BL4080F: 52 min
	Grass catcher capacity
	50 L
	Vibration Level
	2.5 m/s <sup>2</sup> or less
	Measured sound power level
	90 dB(A)
	Sound pressure level
	81 dB(A)
	Dimensions (L x W x H)
	During operation:
	1,390 - 1,440 x 460 x 990 - 1,020 mm
	When stored (w/o Grass box):
	520 x 460 x 885 mm
	Net weight
	15.6kg (BL4020) - 18.2 kg (BL4080F)
<b>Standard Equipment:</b> Blade 430 set (1913H4-8), mulching plug 430 set (1913H8-0), socket wrench 17 (782210-8)	
<b>LM004GZ:</b> Battery & charger are sold separately	

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

A3-092023-1

**CÔNG TY TNHH MAKITA VIỆT NAM**

Kho 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.  
ĐT: 0226 352 5079 / 0238 352 5179 Fax: 0238 352 5478

**CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC**  
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.  
ĐT: 0222 376 5942 Fax: 0222 376 5941

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG**  
**CHI NHÁNH ĐÀ NẴNG**  
Số 40, Đường Chi Lăng, P. Hải Châu II, Q. Hải Châu, TP. Đà Nẵng.  
ĐT: 0236 352 5079 / 0238 352 5179 Fax: 0238 352 5478

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG**  
**CHI NHÁNH HẢI PHÒNG**  
Số 01 Lê Duẩn, Dị an Hoàng Hai Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.  
ĐT: 0225 883 1529

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG**  
**CHI NHÁNH HỒ CHÍ MINH**  
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.  
ĐT: 0283 821 5191

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG**  
**CHI NHÁNH HÀ NỘI**  
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.  
ĐT: 0243 202 2585

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG**  
**CHI NHÁNH CẦN THƠ**  
366 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ.  
ĐT: 0292 389 4358 Fax: 0292 389 4358

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG**  
**CHI NHÁNH BUƠN MA THUỘT**  
88 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk.  
ĐT: 0262 355 4556 Fax: 0262 355 4557

**TRUNG TÂM DỊCH VỤ KHÁCH HÀNG**  
**CHI NHÁNH NHÀ TRANG**  
Lô 56-58 đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc, TP. Nhà Trng, T. Khánh Hòa.  
ĐT: 0258 220 0039



Continuous run time  
**52 min**  
Battery: BL4080F on a full battery charge




**Powered by 40Vmax  
XGT Li-Ion battery**



**Mowing area**

on a full battery charge (with BL4080F)

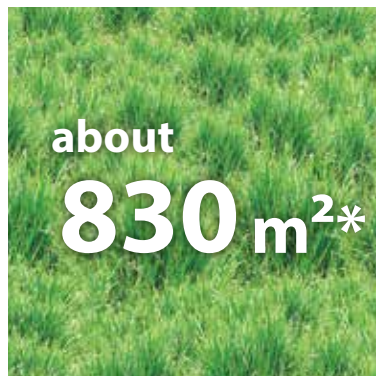

**Continuous use**

on a full battery charge (with BL4080F)

about  
**52 min\***

The results shown here are mowing area under actual load and continuous operation time (when the grass is cut from 50 to 30mm in height), which are approximate values when a fully charged battery is used; therefore, they depend to a great extent on grass density, cutting height, etc.

**Higher mowing performance**

The blade is designed to tilt down towards the front of the mower when attached, minimizing double-cutting to reduce the load on the machine for reduced energy consumption, better feeling of cutting and improved grass collecting performance.



**Cutting, Collecting, Mulching\***

\*Mulching plug required.

**LM004G**

**430 mm (17")**

**Plastic Deck**



**Easy-to-operate handle lock levers**

- each side of the handle can be locked/unlocked with just a single action without tool.
- allows for easier folding of handle when storing the mower.



**Easier cutting height adjustment**

- The increase/decrease directions have been reversed so that they can synchronize easier with the high/low directions of height adjustment in user's mind.
- Easy-to-grip egg-shaped lever top
- U-shaped notches, which provide positive stops for lever, can be visually checked, making it easy to adjust cutting height.



**Less force required to turn on the mower**

Reduction in user fatigue has been achieved by redesigning the shape of switch lever and the specification of spring to reduce the force required to pull switch lever to turn on the mower.

**Pull force required to turn on the mower**  
**Approx. 11 N**



**The inside of cutting deck can be washed.**



**XPT**  
eXtreme Protection Technology / IPX4-compatible