

Lawn care/Grass care

Cordless Scarifier
UV001G
40V max



Cordless Lawn Mower
LM002G (530mm)
40V max



LM004G (430mm)
40V max



Cordless Grass Trimmer
UR012G
40V max x2



Max Output
2.0 kW

Steel deck

Plastic deck

Cordless Grass Trimmer
UR013G
UR014G
40V max



Max Output
1.5 kW



Max Output
1.0 kW



Max Output
0.55 kW



Max Output
0.6 kW

Cordless Multi Function Power Head
UX01G
40V max



Max Output
1.0 kW

Cordless Blower
UB001G
40V max



Accessories ● Standard Equipment

Vertical cutter set

- 380mm Vertical cutter
- Mainly for cutting lawn roots
- No. 1913J5-0 ●



Thatching blade set

- 380mm Thatching blade
- Mainly for removing thatch
- No. 1913J7-6 ●



Charging Time

	Fast Charging	Standard Charging	
		DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min	
*1 BL4025 2.5Ah	28 min	38 min	
*1 BL4040/F 4.0Ah	45 min	67 min	
*1 BL4050F 5.0Ah	50 min	85 min	
*1 BL4080F 8.0Ah	76 min	170 min	

*1 Recommended battery

Cordless Scarifier

UV001GZ 380mm (15")

Brake	Cutting width	380 mm
Anti-restart function	Working depth	-12 mm to 5 mm
Constant Speed	Continuous run time on full battery charge	w/ BL4080F x2, Vertical cutter: 38 min w/ BL4080F x2, Thatching blade: 41 min w/ BL4080F x2, Vertical cutter: 500 m ² w/ BL4080F x2, Thatching blade: 510 m ²
	Actual mowing area on full battery charge	
	No load speed (RPM)	3,200
	Grass catcher capacity	50 L
	Sound pressure level	74 dB(A)
	Measured sound power level	86 dB(A)
	Vibration Level	2.5 m/s ² or less
	Dimensions (L x W x H)	1,020-1,240 x 680 x 915-1,155 mm
	Net weight	18.7kg (BL4020)-23.8 kg (BL4080Fx2)

Standard Equipment :
Vertical cutter set (1913J5-0),
thatching blade set (1913J7-6),
socket wrench (782223-9)

UV001GZ: Battery & charger are sold separately

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

A3-092023-1



More air

More water

For improved lawn rooting

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 456, Block 16, 19L1-2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - DT - DV VSPP Bắc Ninh, P. Phú Châu,
TP. Từ Sơn, T. Bắc Ninh
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
Số 40, Đường Chi Lăng, P. Hải Châu 1, Q. Hải Châu, TP. Đà Nẵng
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
366 Võ Văn Kiệt, Khu Vực 3, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ
ĐT: 0292 389 4358 Fax: 0292 389 4358

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BUƠN MA THUỘT
88 Lê Đức Thọ, P. Thắng Mỹ, TP. Buôn Ma Thuột, T. Đắk Lắk,
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lê Duẩn, Di An Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng
ĐT: 0225 863 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH NHÀ TRANG
Lô 56-38 đường B6, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc,
TP. Nhà Trng, T. Khánh Hòa
ĐT: 0258 220 0639

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,
ĐT: 0283 821 5191



More air

More water

For improved lawn rooting

Grass catcher capacity
50 L

Large Front/Rear tires with wheel diameter of 180/180mm

Vertical cutter

Aeration applications

Able to perform both thatching and vertical cutting to cut through runners and roots


Highly durable vertical cutter

- Blunt angled blade tip slows blade wear to minimize the reduction in working depth.
- The slow wear reduces blade change frequency and running cost.

Low vibration

The blades of Vertical cutter are arranged symmetrically about the left-right center line of the rotary blade shaft to provide balanced rotation for reduced vibration.

Easy blade change

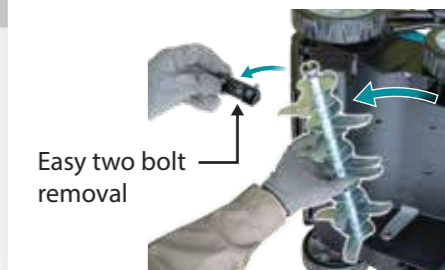

Vertical cutting

Effect obtained at different working depth settings

shallow **+5 mm**

deep **-12 mm**

18 stage (in 1mm increments)

Dial style working depth adjustment

Fine adjustment of working depth can be made by operating a dial, allowing for adjustment of working depth to suit the environment for lawn growth and wear of blade.

Blade type	Applications and features	Image
Vertical cutter	For cutting through old roots for healthy lawn and cutting through thatch and soil for improved penetration of water and air.	
Thatching blade	For removing deposited lawn clippings, generated moss, etc.	

XPT

XPT (eXtreme Protection Technology) / IPX4-compatible



Toolless foldable handle


Handle can be folded in two steps for compact storage simply by loosening thumb screws without tool.



Thatching blade

For thatching only

For removing deposited lawn clippings, generated moss, etc.

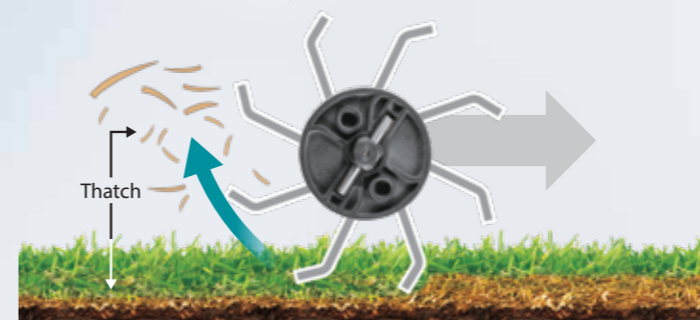

Lower section of handle
Blade section

Stable operation due to the center of gravity located in the front

Heavy items, such as motor, battery and the lower section of handle, are located in the front of the machine body. This structure can minimize the chance that the front wheels will leave the ground, allowing for reliable power transmission to blade to provide consistent cutting depth.



Powered by 40Vmax XGT Li-Ion battery (two in parallel or one)

Automatic battery switching

If two batteries are installed and one battery in use has run out of power, the battery system automatically switches to the other one. (No special operation, such as on/off operation, is required.)

Actual mowing area on full battery charge

With two BL4080F batteries

<p>Vertical cutter</p> <p>Working depth: -4 mm</p> <p>500 m²</p>	<p>Thatching blade</p> <p>Working depth: 0 mm</p> <p>510 m²</p>
---	--

