



# Slide Compound Miter Saw LS1110F 255 - 260 mm



LED job light with cut line guide function




\*Max cutting width:  
**310 mm**

\*Max cutting height:  
**91 mm**

\*with 260mm (10-1/4") saw blade

## LED job light with cut line guide function

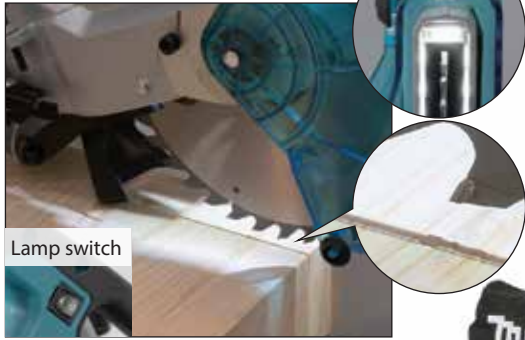

Lamp switch

LED job light casts a shadow of the saw blade onto the workpiece as an exact cutting line. By aligning the shadow with the ink line on the workpiece, you can make an exact cut.

**Carrying handle**  
for easy transportation to job site


**Soft grip**

**Sub base**  
can be pulled out for more stable cutting of wide workpiece.


## Bevel range of 47° left and 2° right

Easy bevel angle change from 45° to 47° left and from 0° to 2° right with simple operation of a push-button

**Lever**  
(for bevel angle)



Push-button

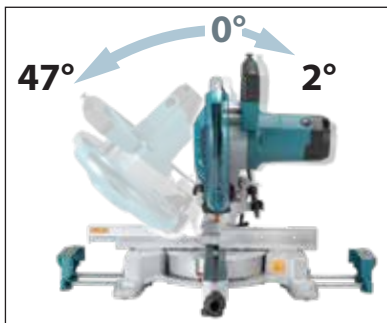

## Slide style sub fence

(left side only)




## Miter range of 47° left and 47° right




## Cutting capacity (height x width)

with 260mm (10-1/4") saw blade

### Cross Cut




### Miter Cut (left & right)

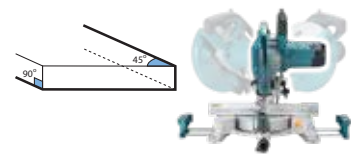

Miter 0° Bevel 0°	91 x 310 mm (3-5/8 x 12-1/4")
----------------------	----------------------------------

Miter 45° left / right Bevel 0°	91 x 220mm (3-5/8 x 8-5/8")
------------------------------------	--------------------------------

### Bevel Cut (left & right)



### Compound Cut



Miter 0° Bevel 45° left	50 x 310mm (2 x 12-1/4")
Miter 0° Bevel 2° right	85 x 310mm (3-3/8 x 12-1/4")

Miter 45° left / right Bevel 45° left	50 x 220mm (2 x 8-5/8")
--	----------------------------

## Accessories

### Miter Saw Stand WST06



## Slide Compound Miter Saw

### LS1110F 255 - 260 mm

Double Insulation	Continuous rating Input	1,450W
Brake	Wheel diameter	255 - 260 mm
Soft Start	Bevel angle	Left: 47° / Right: 2°
Dust Collection	Miter angle	Left: 47° / Right: 47°
Built-in Job Light	No load speed (RPM)	4,500 v/p
	Sound pressure level	91 dB (A)
	Sound power level	102 dB (A)
	Dimensions (L x W x H)	745 x 497 x 565 mm
	Net weight	16.4 kg (/w vertical vise)
	Power supply cord	2.0 m

**Standard Equipment :** Dust bag (JM00000624), TCT saw 260X40T (D-77338), hex key wrench 6mm & PH2 (JM00000445)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A4-122023-3

## CÔNG TY TNHH MAKITA VIỆT NAM

Kho 456, Block 16, 18/12 Đường số 3, KCN VSP, P. Hòa Phú, TP. Thủ Đức, Bình Dương  
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

### CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC

Kho 5, Số 1, Đường Số 6, KCN - DT - DV VSP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh.  
ĐT: 0222 376 5942 Fax: 0222 376 5941

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI

65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội.  
ĐT: 0243 202 2585

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG

36/40, Đường Chi Lăng, P. Hải Châu II, Q. Hải Châu, TP. Đà Nẵng.  
ĐT: 0236 352 5078 / 0236 352 5178 Fax: 0236 352 5479

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ

366 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy, TP. Cần Thơ.  
ĐT: 0292 389 4358 Fax: 0292 389 4359

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỐT

89 Lê Đức Thọ, P. Thới An, TP. Thuận An, TP. Thuận An, TP. Thuận An.  
ĐT: 0262 355 4558 Fax: 0262 355 4557

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG

Số 01 Lô D401, Dự án Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng.  
ĐT: 0225 883 1529

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH NHA TRANG

Là 36/38 đường B6, Khu đô thị Vinh Diêm Trung, Xã Vinh Ngọc, TP. Nha Trang, T. Khánh Hòa.  
ĐT: 0258 220 0039

### TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HỒ CHÍ MINH

Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh.  
ĐT: 0283 821 5191