



Accessories

Adapter pipe 85-72 set

Part No. 191L96-5



Flat nozzle set

Part No. 197889-6

Narrow profile improves air speed for removing heavier debris such as wet leaves



Battery Powered Blower UB003C
Portable Power Pack PDC1500



UB003C

Continuous run time (approx)
on a full battery charge
with PDC1500

60 min

Maximum speed mode or maximum speed with the cruise control lever /
With standard nozzle attached

Portable Power Pack

Portable Power Pack

PDC1500

PDC1200

Charger **DC4001**

Charging time
PDC1500: 450 min.
PDC1200: 360 min.

PDC01

Powered by up to four 18V LXT batteries

Battery Powered

Blower **UB003C**

Backpack Blower **UB002C**

Grass Trimmer **UR101C**
UR201C
UR202C

Lawn mower **LM001C**

Adapter set

40Vmax

Part No. 191N62-4

Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

18Vx2

Part No. 191J51-5

Adapter between Battery box of Portable power pack and Product on 18Vx2 LXT platform

18V

Part No. 191J50-7

Adapter between Battery box of Portable power pack and Product on 18V LXT platform
*PDC01 only

Battery Powered Blower UB003C		Portable Power Pack PDC1500	
Variable Speed	Max air volume w/ End nozzle, w/ PDC1500, Max speed mode: 2.9 - 17.2 m ³ /min	Capacity	43.55 Ah
Anti-restart function	Max air velocity w/ End nozzle, w/ PDC1500, Max speed mode: 86.0 m/s	Energy capacity	1,567.8 Wh
Electronic 3-Speed	Avg. air velocity w/ End nozzle, w/ PDC1500, Max speed mode: 11.7 - 71.9 m/s	Number of cells	130
Constant Speed	Blowing force w/ End nozzle, w/ PDC1500, Max speed mode: 0.7 - 24 N	Charging time	450 min.
	No load speed Mode1 / Mode2 / Mode3: 4,000-10,600 / 17,700 / 22,100 min ⁻¹	Dimensions (L x W x H)	w/o Harness: 369 x 312 x 131 mm (14-1/2 x 12-1/4 x 5-1/8")
	Continuous use (approx.) on a full battery charge w/ End nozzle, w/ PDC1500, Max speed mode: 60 min	Net weight	10.9 - 12.9 kg (24.0 - 28.4 lbs.)*
	Sound pressure level 82.2 dB(A)	Power supply cord	Battery side: 1.2 m (3.9 ft) Adapter side: 0.6 m (2.0 ft)
	Sound power level 92.4 dB(A)		
	Vibration level 2.5 m/s ² or less		
	Dimensions (L x W x H) w/ Nozzle: 913 - 1,013 x 178 x 298 mm (36 - 40 x 7 x 11-3/4")		
	w/o Nozzle: 662 x 178 x 298 mm (26 x 7 x 11-3/4")		
	Net weight 2.8 - 3.1 kg (6.2 - 6.8 lbs.)		
	Standard Equipment : End nozzle, Band assembly		
		Standard Equipment : Harness, Charger	

Weight according to EPTA-Procedure 01/2014
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202312

Average blowing force	Max air volume	Max air velocity
24 N	17.6 m³/min	86.0 m/s
Maximum speed mode or maximum speed with the cruise control lever, with PDC1500 / With standard nozzle attached		



High output power



1,500Wh-class high capacity

Portable Power Pack
PDC1500



Charging time
450 min.
with DC4001


More robust appearance and increased strength

- Achieved by:
- New stand with increased strength obtained by using a larger diameter metal pipe
 - Metalized junctions between battery and harness

Reflectors



Quickly removable harness

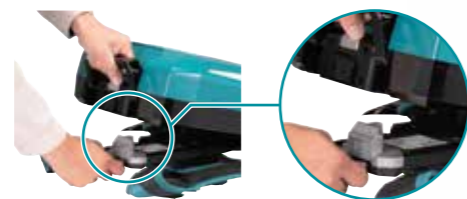

Height-adjustable waist belt

The position of the waist belt can be adjusted for personal fit and comfort.



Compatible with a wide range of applications

(both in backpack and stationary styles)



Battery fuel gauge



High power & Lightweight design

Net weight
2.8 kg
With End nozzle 72 and
without Band assembly



3 Speed mode button



Variable control trigger + Cruise control lever



Best grip-to-frame angle

Battery Powered Blower
UB003C



Hole on the bottom of housing for hanging the machine on a wall-mounted hook for storage



Easy-to-hold machine bottom design for added comfort and control in double handed operation



Improvements for more comfortable backpacking experience



Plastic back plates have been extended up to the rear of the user's shoulders to distribute the pressure on the shoulders.



Chest belt added to minimize the chance that both shoulder belts might slip outward.



Swivel mechanism on waist belt reduces user's fatigue

The waist belt section swivels around the fulcrum to adapt to the user's working posture.



Nozzle reducing reaction force

The recoil of the machine tilting is reduced with the grip as the fulcrum since the reaction force is directed toward the grip by tilting the nozzle tip downward, therefore, the burden on the user's arm is reduced.



3-stage telescopic long nozzle



Harness can be attached

The machine can be hung by connecting the band to the harness of PDC1500, therefore, the burden on the user's hand can be reduced.

