

Cordless Power Cutters Line-up

CE001G 40V max x2

355 mm (14") | Dry & Wet

BL MOTOR AFT XPT



Max cutting capacity	127 mm (5")
No load speed	5,300 min ⁻¹
Dimensions (L x W x H)	w/ BL4050F X2: 786 x 272 x 433 mm
Net weight	12.3 kg (BL4040Fx2) 14.1 kg (BL4080Fx2)



CE002G 40V max x2

355 mm (14") | Dry only

BL MOTOR AFT AWS



Max cutting capacity	127 mm (5")
No load speed	4,200 min ⁻¹
Dimensions (L x W x H)	w/ BL4050F X2: 825 x 272 x 487 mm
Net weight	13.1 kg (BL4040Fx2) 15.1 kg (BL4080Fx2)



Accessories

Standard Equipment: ● CE001G ● CE002G ● CE003G

Abrasive Cut-off Wheel / Inox

Part no. E-03006
230 x 2.0 x 22.23 WA36R



Diamond Wheel 230mm Segmented

Part no. E-02967
230 x 22.23 Dry & Wet



230mm Diamond wheel ideal for cordless power cutter

- New diamond wheel with even pattern placement of diamond grits.
- The grit arrangement provides sharp cutting edge constantly.

Vacuum brazed diamond wheel for rescue 350mm

Part no. B-55348



Diamond wheel for concrete

Segmented type
355 x 25.4
Part no. D-56998 ● ●



Segmented type
300 x 25.4
Part no. D-56982 (only CE004G)



Abrasive cut-off wheel for Metal

355 x 4.3 x 25.4 A24T
5 per set
Part no. E-12790-5 (only CE001G)



Lightweight and compact, yet capable of high-speed and powerful cutting

Work efficiency

Heavy-duty concrete cutting

Test conditions: Make 300mm-long and 50mm-deep cuts in a ground boundary block with water supply.

45% UP **CE003G**

40% UP **CE004G**

Battery: BL4050F on a full battery charge
Compared with our 18Vx2 model

Charging Time

	Fast Charging		Standard Charging	
	DC40RA	DC40RB	DC40RC	DC40WA
BL4020 2.0Ah	22 min	30 min	110 min	
BL4025 2.5Ah	28 min	38 min	130 min	
*BL4040/F 4.0Ah	45 min	67 min	210 min	
*BL4050F 5.0Ah	50 min	85 min	260 min	
*BL4080F 8.0Ah	76 min	170 min	420 min	

*1 Recommended battery

Cordless Power Cutter

CE003GZ01 / CE004GZ 230mm / 305mm

	CE003G	CE004G
Brake		
Constant Speed		
Built-in Job Light		
Anti-restart Function		
Wheel diameter	230 mm	305 mm
Max cutting capacity	88 mm	121 mm
No load speed	6,600 min ⁻¹	5,000 min ⁻¹
Vibration level	Left / Right: 3.0 / 2.5 m/s ²	Left / Right: 3.8 / 2.5 m/s ²
Sound pressure level	105 dB(A)	99 dB(A)
Sound power level	116 dB(A)	110 dB(A)
Dimensions (L x W x H)	603 x 240 x 350 mm	663 x 240 x 406 mm
Net weight	6.4 kg (BL4040F) - 7.4 kg (BL4080F)	6.7 kg (BL4040F) - 7.7 kg (BL4080F)

CE003GZ01/CE004GZ: Battery & charger are sold separately

Standard Equipment: **CE003GZ01:** Wrench holder assembly (122G62-1), coupling sleeve (123121-2), box wrench 13-19 (782039-2), diamond wheel 230mm segmented (E-02967).
CE004GZ: Wrench holder assembly (122G62-1), coupling sleeve (123121-2), box wrench 13-19 (782039-2), ring set (1914A3-7), flange 80 (224636-3).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. A3-062024-1

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 5/5, Block 16, 19/1-2 Đường số 3, KCN VSPP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 382 8338 - Fax: 0274 382 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - DT - DV VSPP Bắc Ninh, P. Phú Châu, TP. Từ Sơn, T. Bắc Ninh
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH ĐÀ NẴNG
Số 40, Đường Chi Lăng, P. Hải Châu 1, Q. Hải Châu, TP. Đà Nẵng
ĐT: 0236 352 5079 / 0236 352 5179 Fax: 0236 352 5478

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH BUỒN MA THUỘT
88 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đình, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh
ĐT: 0283 821 5191

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH CẦN THƠ
386 Võ Văn Kiệt, Khu Vực 5, P. An Thủy, Q. Bình Thủy, TP. Cần Thơ
ĐT: 0292 389 4358 Fax: 0292 389 4359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HẢI PHÒNG
Số 01 Lê Đình, Di An Hoàng Huy Riverside, P. Thượng Lý, Q. Hồng Bàng, TP. Hải Phòng
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG CHI NHÁNH HÀ NỘI
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh
ĐT: 0283 821 5191

Max cutting capacity	
CE003G	CE004G
88 mm	121 mm

High-speed and powerful cutting suitable for various situations



High power

High efficiency equal or superior to our current model has been achieved with any one of the batteries BL4040F / BL4050F / BL4080F.

BL4040F
[4.0Ah]

BL4050F
[5.0Ah]

BL4080F
[8.0Ah]



Net weight
6.4 kg ^{CE003G}
[CE004G: 6.7kg]
with BL4040F

Lightweight and compact for comfortable maneuverability

photo: CE003G



photo: CE004G

Max cutting capacity **88 mm** ^{CE003G} | **121 mm** ^{CE004G}

Anti-vibration housing to reduce vibration during cutting



Anti-vibration rubber (2 pcs)
Anti-vibration rubbers (2 pcs) are placed around the motor to reduce vibration during cutting.

Low vibration [Left handle]
3.0 m/s² ^{CE003G}
[Right handle: 2.5 m/s²]

Low vibration [Left handle]
3.8 m/s² ^{CE004G}
[Right handle: 2.5 m/s²]



photo: CE003G


Rescue operation

Operable in various environments

- Unlike the engine type, the tool starts reliably even in oxygen-deficient conditions
- Emits no exhaust gases, making it usable indoors and underground

AFT Active Feedback sensing Technology

shuts down current to the motor, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

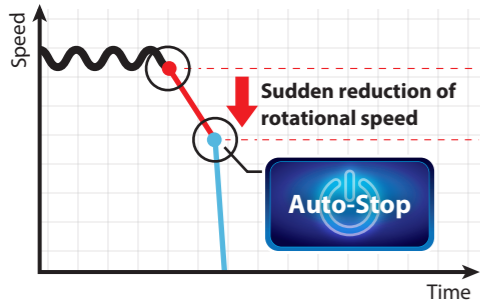


Rotatable guard

The position of Guard can be adjusted to suit working posture.





Overload indicator lamp

It alerts operator of overload with a red blinking LED and reduces unnecessary battery recharging by overload protection.



LED job light

LED job light enables operation in the dark sites where electricity is not supplied. It can be turned on/off by pushing the button conveniently located on the top of the tool.



Lamp button

Water supply kit can be connected.

By supplying water to the blade, the generation of dust during cutting is minimized.



Lock-off button

Lock-off button minimizes accidental start up.



XPT eXtreme Protection Technology / IPX4 compatible

40V max

CE003G

230mm (9")
Dry & Wet



40V max

CE004G

305 mm (12")
Dry & Wet

