

40Vmax Chain Saw series

Equivalent to 42cc-class chain saws

UC012G
UC020G (Motor unit only)
(Captive nuts type)



photo: UC012G

photo: UC016G

UC016G
(Tool-less chain adjustment type)

Equivalent to 35cc-class chain saws

UC021G/ UC022G/ UC023G
(Tool-less chain adjustment type)



photo: UC021G


Accessories Standard Equipment

Guide Bar / Saw Chain / Guide Bar Cover / Drive sprocket

Guide Bar					Saw Chain					Guide Bar Cover	Drive sprocket	
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Part No.	Type	Part No.
40cm/16"	D025	Sprocket nose bar	1915Y7-3	67	1.3mm/0.050"	0.325"	95TXL	Micro chisel	1916A1-3	4133L9-9	Sprocket 0.325"	1916A5-5
45cm/18"			1915Y8-1	74					1916A2-1			
50cm/20"			1915Y9-9	82					1916A3-9			
50cm/20"	D025	Sprocket nose bar	1916A0-5	82	1.6mm/0.063"	0.325"	22BPX	Micro chisel	1916A4-7	4133H6-7		

Round file and File holder

The file holder guides sharpening at 30° and controls depth to 4/5 of the file diameter.



Flat file

To adjust Depth Gauge height



File handle

For flat file and round file



Round file bit

6.35mm (1/4) Hex shank (MZ), ø4.8mm

Angle plate

25 / 30deg



Size	Saw chain type	Round file		Round file and File holder	Q'ty	Part No.	Q'ty	Part No.	Q'ty	Part No.
		Q'ty	Part No.							
4.8mm	95TXL 22BPX	2	D-67393	D-70960	1	D-67452	1	D-67496	12	D-67505
		12	D-67402		12	D-67468	50	D-67505		


Round file bit	Angle plate	Angle plate & file bit set
Part No.	Part No.	Part No.
D-73760	D-75605	D-75633

Depth gauge jointer

After sharpening the chain, check the height of the depth gauge using the chain gauge tool.



Part No.
D-67474



File set in roll-up pouch

Ø4.8mm Round File (3pcs) / File Holder / Flat File / Handle (2pcs) / Depth Gauge

Part No.
D-72176

Filing vise



Part No.
D-67480

Charging Time

	Fast Charging	Standard Charging
	DC40RA	DC40RC
BL4040F 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min
BL4080F 8.0Ah	76 min	170 min
*1BL4080H 8.0Ah	76 min	170 min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area. [A4-092025-1]

MAKITA VIETNAM COMPANY LIMITED

UNIT 4-5-6, Block 16, 18L1-2, Street No 3, VSIP2, Binh Duong Ward,

Ho Chi Minh City

Tel: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

MAKITA VIETNAM COMPANY LIMITED NORTH BRANCH

Unit 5, No.1, Road 6, Vsp Industrial Park, Tu Son Ward, Bac Ninh Province
Tel: 0222 376 3942

MAKITA VIETNAM COMPANY LIMITED - HANOI BRANCH

Group 15 and No.4 Alley 63 Trung Chinh Street, Phuong Liet Ward, Hanoi City
Tel: 0243 202 2585

MAKITA VIETNAM COMPANY LIMITED - DA NANG CITY BRANCH

40 Chi Lang, Hai Chau Ward, Da Nang City
Tel: 0236 3525 179

MAKITA VIETNAM COMPANY LIMITED - CAN THO CITY BRANCH

366 Vo Van Kiet Street, Area 5, Binh Thuy Ward, Can Tho City
Tel: 0292 389 4358

MAKITA VIETNAM COMPANY LIMITED - BUON MA THUOT CITY BRANCH

68 Le Duc Tho, Buon Ma Thuot Ward, Dak Lak Province
Tel: 0262 355 4356

MAKITA VIETNAM COMPANY LIMITED - HAI PHONG CITY BRANCH

No 01, Lot 04-01, Hoang Huy Riverside, Hong Bang Ward, Hai Phong City
Tel: 0225 883 1529

MAKITA VIETNAM COMPANY LIMITED - NHA TRANG CITY BRANCH

Lot 36-38, B6 Street, Vinh Diem Trung Urban Area, Tay Nha Trang Ward, Khanh Hoa Province
Tel: 0258 220 0039

MAKITA VIETNAM COMPANY LIMITED - HO CHI MINH CITY BRANCH

12 Trinh Van Can, Ben Thanh Ward, Ho Chi Minh City
Tel: 0283 821 5191



Cordless Chain Saw UC030G



Efficiency equal to or greater than that of 50cc-class chain saws



Max. chain speed

29.0 m/s

High speed cutting

8.7 sec.

ø400mm cedar log

Battery : BL4080H

Guide bar/ Saw chain: 500mm/ 95TXL




Excellent work efficiency with the high-output BL4080H battery and brushless motor



Recommended battery:
High-output BL4080H
for excellent performance

Li-ion **8.0 Ah**

BL
MOTOR

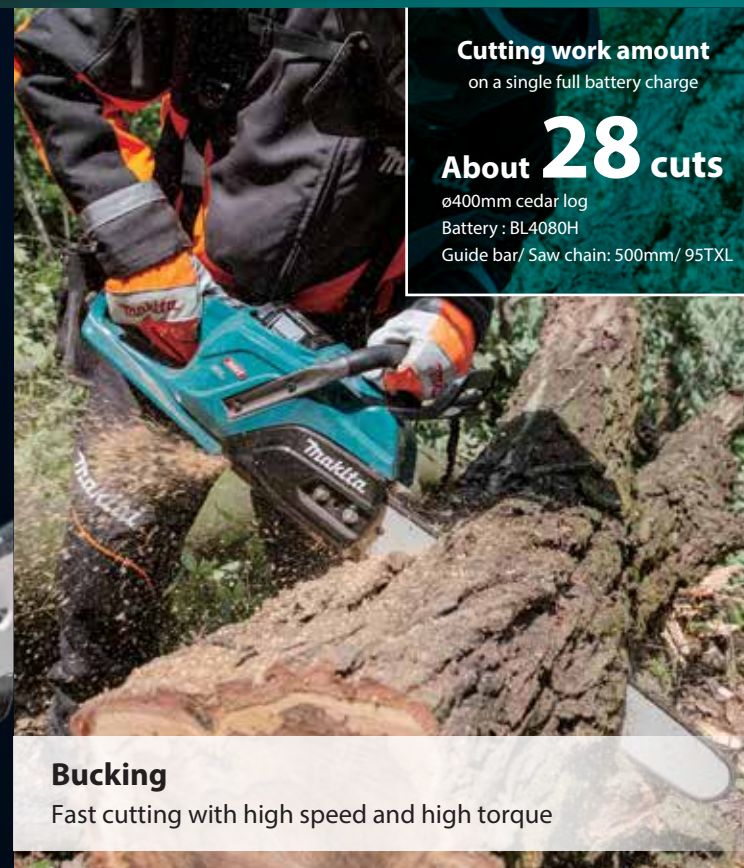

Cutting work amount
on a single full battery charge

About 28 cuts

ø400mm cedar log
Battery : BL4080H
Guide bar / Saw chain: 500mm / 95TXL

Bucking

Fast cutting with high speed and high torque



Highly visible felling line



Felling


Optimal handle design for precise tree felling

High-output BL4080H battery

Featuring tabless cells, this battery delivers approximately 35% higher output than the BL4080F. This battery maximizes the tool's performance and enables continuous high-load operation that exceeds the performance of the BL4080F.


A feeling of tenacity in use

When the user presses the tool against the material with excessive force, they can feel a decrease in rotation speed, making it easy to adjust the load on the cutting edge.

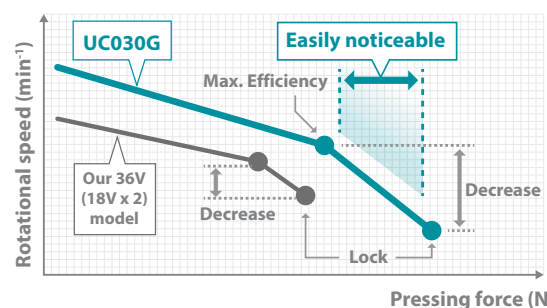

Excellent acceleration


To enable efficient continuous and repetitive cutting tasks such as limbing, the response to trigger operation has been enhanced to provide acceleration.

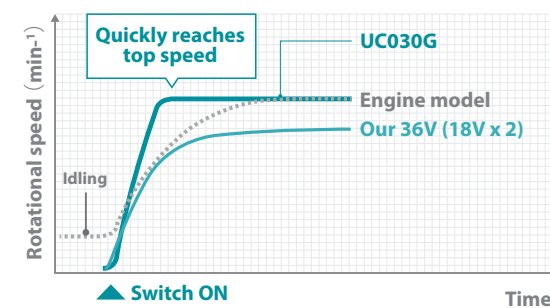

Control interface with excellent visibility and operability/ Chain speed: 3 modes


Display section

With six types of icons and high-brightness LEDs, tool's status can be easily checked.

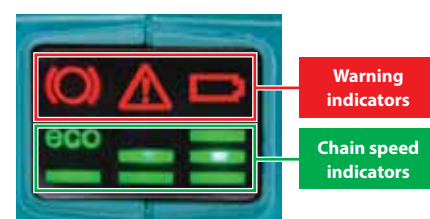


Control section

The buttons have been redesigned to provide tactile feedback, enhancing usability.

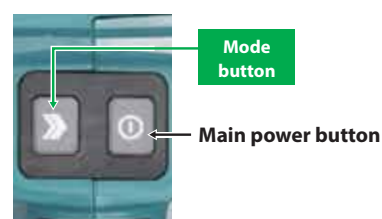

Auto power-off time: 5 min.

Operability has been improved by redesigning the lock-off lever structure and setting the auto power-off time to 5 minutes.

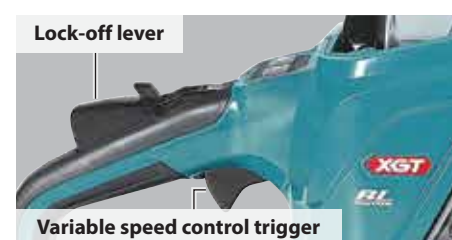

Water and dust resistant *1
Designed for use in rainy conditions

*1 This tool is designed to withstand operation in rainy conditions as specified by our internal standards. This tool is not guaranteed to be free from malfunction due to water or dust.



The tool is IPX4M-rated *2
for use in rainy conditions.

*2 The IPX4M rating applies only when:
• The tool is marked with both the IPX4M mark and the use-in-rain symbol.
• The battery is marked with either the use-in-rain symbol, the "Gen.2" mark, or both.



Guide bar length (saw chain type)
■ 500mm (95TXL, 22BPX)
■ 450 / 400mm (95TXL)



Large oil tank cap
Chain oil level window



Metal spike bumper



Captive nuts to prevent nut loss



Chain tensioning screw



Metal chain catcher screw